



BRIGHT LED ELECTRONICS CORP.

Total Page: 6
Page: 1
Revision: 1.0

● Commodity: Photo Interrupter

● Device Number : BPI-3C2-02

Sheet Date	1	2	3	4	5	6				Contents
2001.12.20	1.0	1.0	1.0	1.0	1.0	1.0				Initial Released
2002.01.08	1.0	1.0	1.0	1.0	1.0	1.1				Packaging Bag Dimensions

Total Page	6																			
------------	---	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

佰鴻工業股份有限公司

BRIGHT LED ELECTRONICS CORP.

台北縣板橋市和平路 19 號 3 樓

3F., No. 19, Ho Ping Road, Pan Chiao City,

Taipei, Taiwan, R. O. C.

Tel: 886-2-29591090

Fax: 886-2-29547006/29558809

www.brtled.com

Approved	Drawn

BRIGHT LED ELECTRONICS

Photo Interrupter Specification

- Device Number : BPI-3C2-02
- Absolute Maximum Rating (Ta=25°C)

Page: 2
Version: 1.0

Item		Symbol	Rating	Unit
Input	Power Dissipation	Pd	75	mW
	Reverse Voltage	V _R	5	V
	Forward Current	I _F	50	mA
	Peak Forward Current (*1)	I _{FP}	1	A
Output	Collector Power Dissipation	P _C	100	mW
	Collector Current	I _C	20	mA
	C-E Voltage	V _{CEO}	30	V
	E-C Voltage	V _{ECO}	5	V
Operating Temperature		Topr	-25 ~ +85	°C
Storage Temperature		Tstg	-40 ~ +100	°C
Soldering Temperature (*2)		Tsol	260	°C

(*1) tw=100 uSec., T=10 mSec.

(*2) t=5 Sec

- Electrical Optical Characteristics (Ta=25°C)

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit
Input	Forward Voltage	V _F	I _F =20mA	—	1.2	1.5	V
	Reverse Current	I _R	V _R =5V	—	—	10	μA
	Peak Wavelength	λ _p	I _F =10mA		940		nm
Output	Dark Current	I _D	V _{CE} =10V	—	—	100	nA
	C-E Saturation Voltage	V _{CE(sat)}	I _C =0.25mA I _F =10mA	—	—	0.4	V
Light Current		I _L	V _{CE} =5V I _F =10mA	0.5	—	10	mA
Speed	Rise Time	Tr	I _{FP} =20mA V _{CE} =5V	—	15	—	μsec
	Fall Time	Tf	R _L =1000Ω	—	20	—	μsec

BRIGHT LED ELECTRONICS


Photo Interrupter Specification

BPI-3C2-02

Page: 3

Version: 1.0

Package Dimensions :

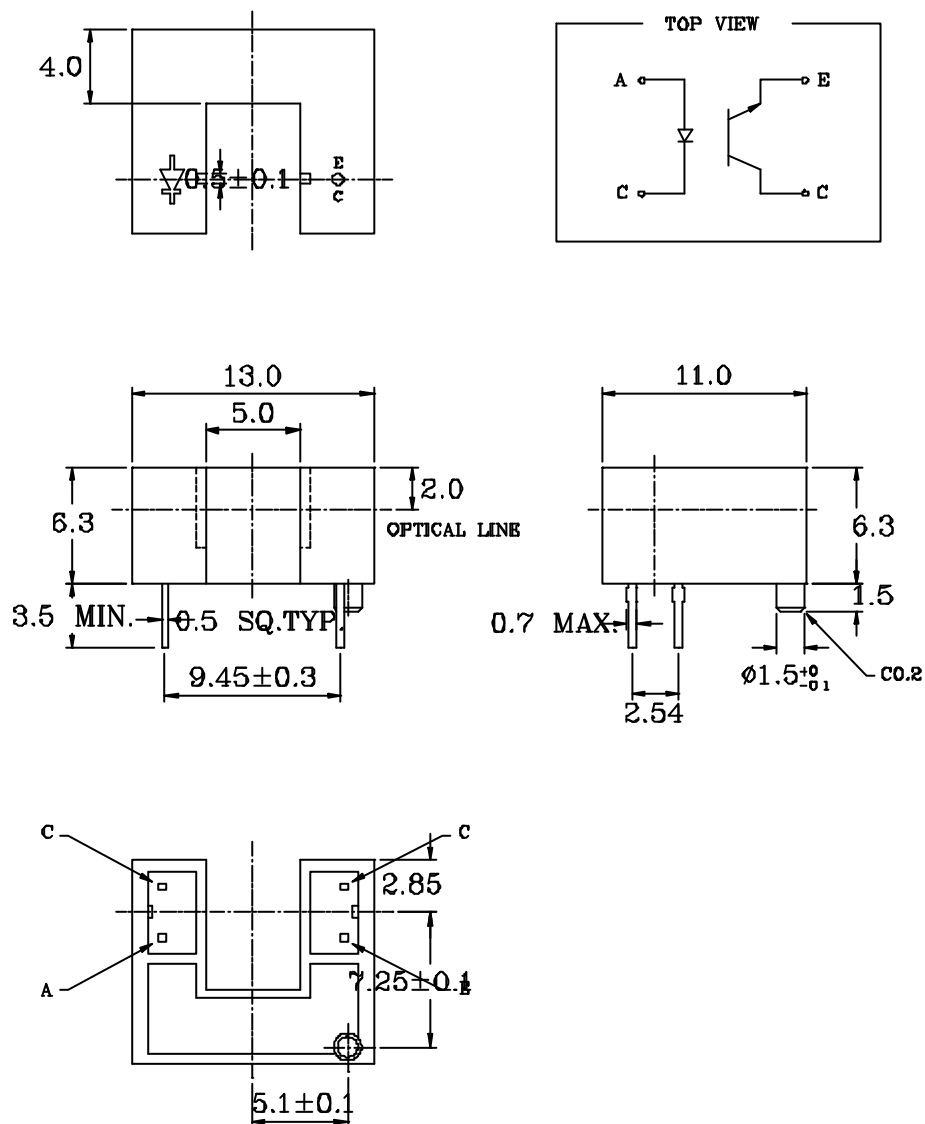

Notes:

1. All dimensions are in millimeters.
2. Tolerance is $\pm 0.25\text{mm}$ unless otherwise specified.
3. Lead spacing is measured where the leads emerge from the package.
4. Specifications are subject to change without notice.

BRIGHT LED ELECTRONICS

Photo Interrupter Specification

- Device Number : BPI-3C2-02
- Typical Electrical / Optical Characteristics Curves (Ta=25°C)

Page: 4
Version: 1.0

Fig.1 Power Dissipation vs. Ambient Temperature

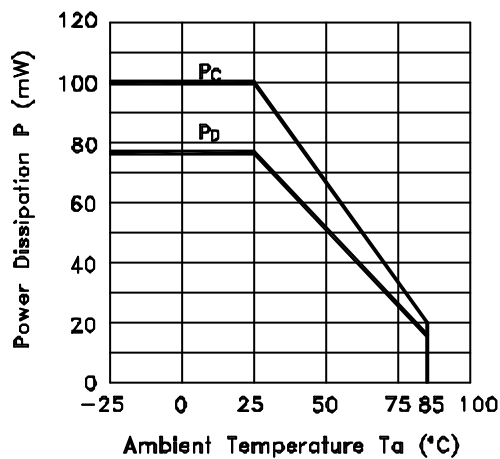


Fig.2 Forward Current vs. Forward Voltage

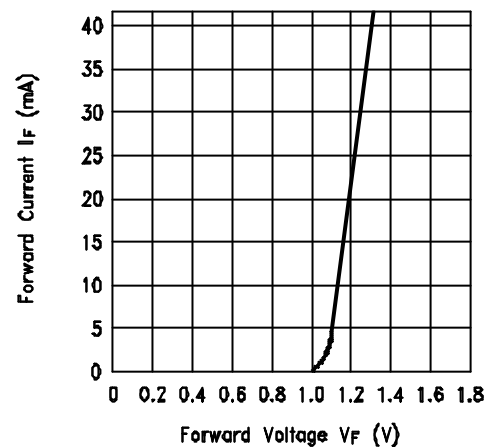


Fig.3 Collector Current vs. Collector-emitter Voltage


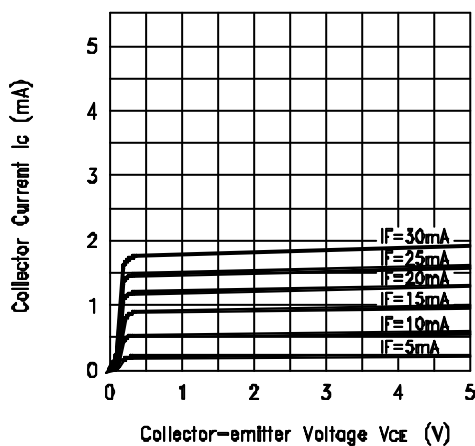


Fig.4 Collector Current vs. Ambient Temperature

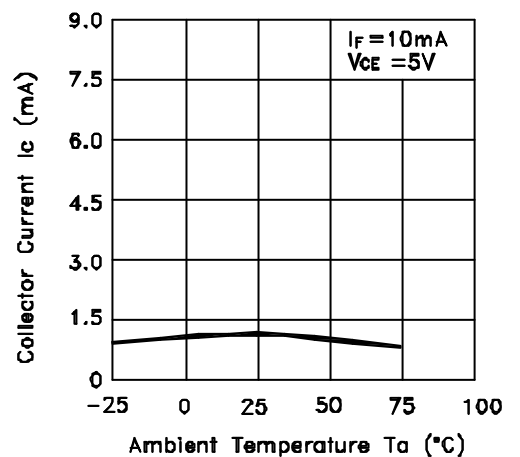

BRIGHT LED ELECTRONICS

Photo Interrupter Specification

- Device Number : BPI-3C2-02
- Typical Electric / Optical Characteristics Curves (Ta=25°C)

Page: 5
Version: 1.0

Fig.5 Collector-emitter Saturation Voltage vs. Ambient Temperature




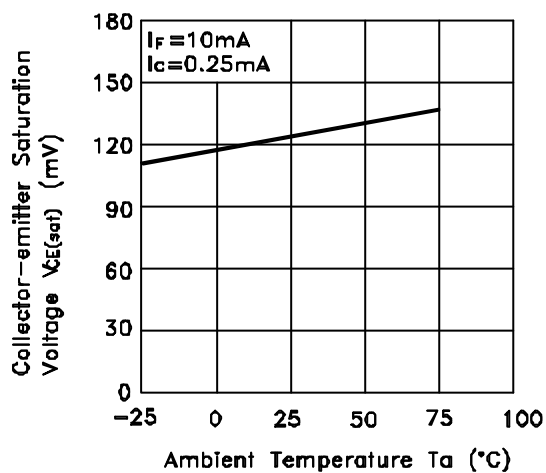


Fig.6 Response Time vs. Load Resistance

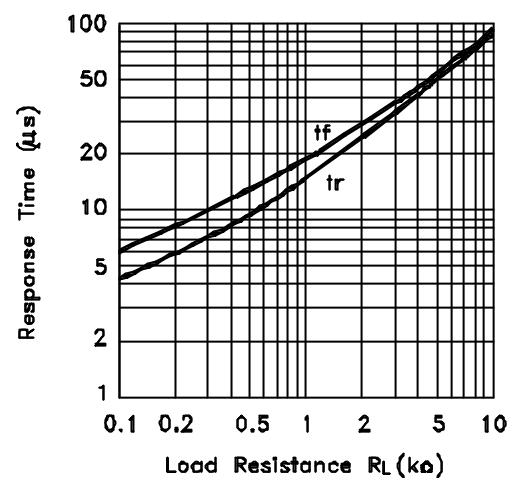

Test Circuit for Response Time

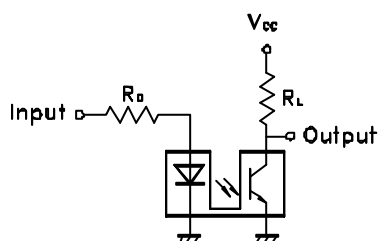


BRIGHT LED ELECTRONICS


Packaging Dimensions

Page: 6
Revision: 1.1

Packaging Box Dimensions

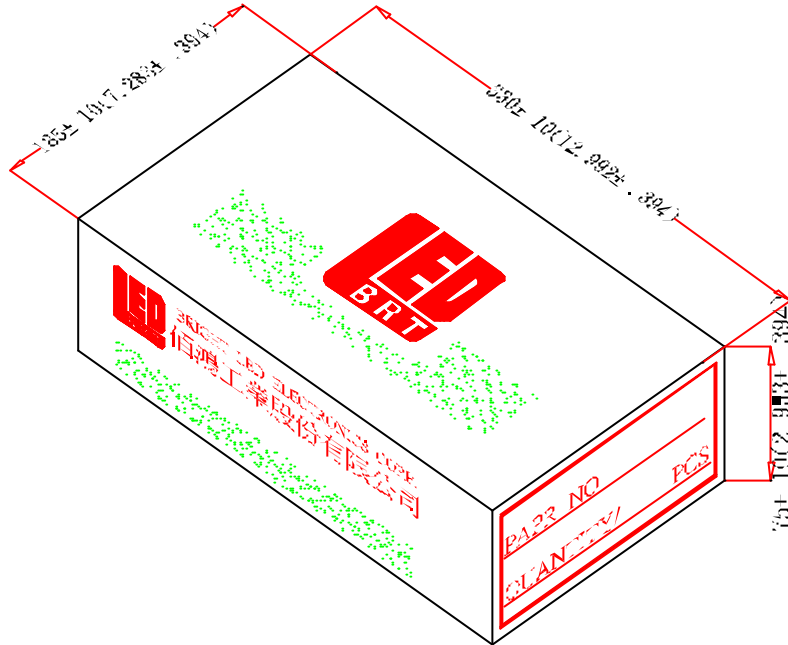

Packaging Bag Dimensions

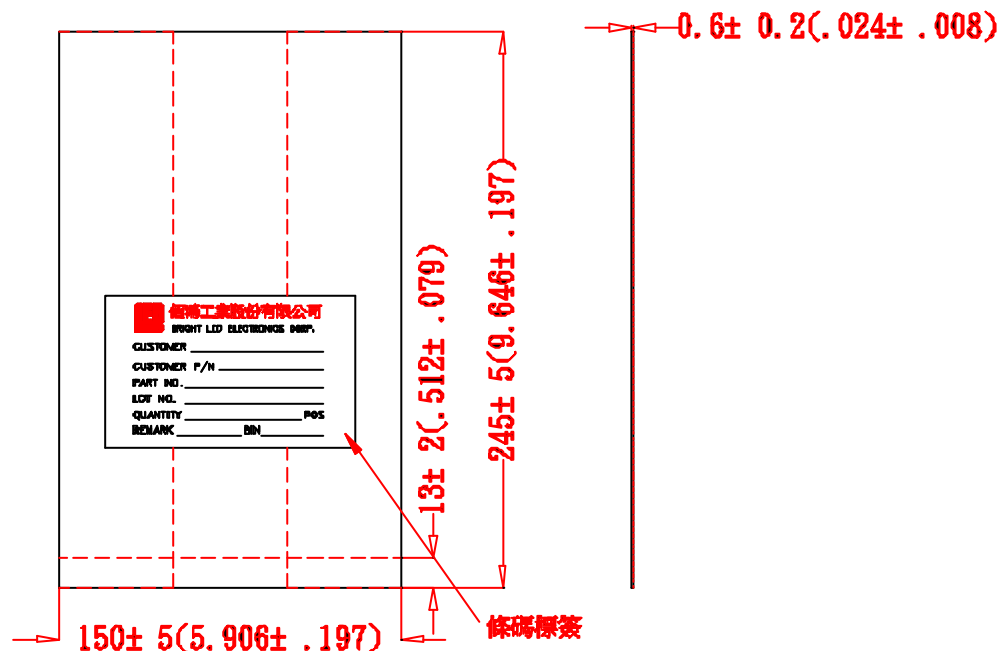

Notes:

1. 250PCS PER BAG, 1KPCS PER BOX.
2. All Dimensions are in millimeters (inches).
3. Specifications are subject to change without notice.