


# LINEAR INTEGRATED CIRCUITS

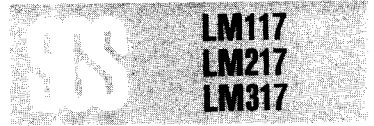


## 1.2V TO 37V ADJUSTABLE VOLTAGE REGULATOR

- OUTPUT VOLTAGE RANGE: 1.2 TO 37V
- OUTPUT CURRENT IN EXCESS OF 1.5A
- 0.1% LINE AND LOAD REGULATION
- FLOATING OPERATION FOR HIGH VOLTAGES
- COMPLETE SERIES OF PROTECTIONS: CURRENT LIMITING, THERMAL SHUT-DOWN AND SOA CONTROL.

They are designed to supply more than 1.5A of load current with an output voltage adjustable over a 1.2 to 37V range.

The nominal output voltage is selected by means of only a resistive divider, making the device exceptionally easy to use and eliminating the stocking of many fixed regulators.


The LM117/LM217/LM317 are monolithic integrated circuit in TO-220 and TO-3 packages intended for use as positive adjustable voltage regulators.

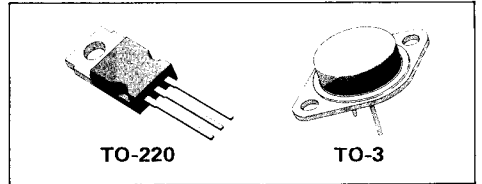

## ABSOLUTE MAXIMUM RATINGS

$V_{i-o}$	Input-output differential voltage	40	V
$I_o$	Output current	Internally limited	
$T_{op}$	Operating junction temperature for: LM 117	-55 to 150	°C
	LM 217	-25 to 150	°C
	LM 317	0 to 125	°C
$P_{tot}$	Power dissipation	Internally limited	
$T_{stg}$	Storage temperature	-65 to 150	°C



### Basic adjustable regulator



**LM117**  
**LM217**  
**LM317**


**CONNECTION DIAGRAMS AND ORDERING NUMBERS**

(top views)

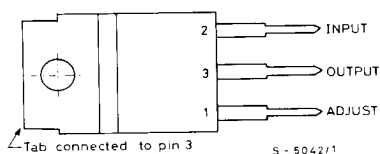

Type	TO-220	TO-3
LM 117	—	LM 117K
LM 217	—	LM 217K
LM 317	LM 317T	LM 317K

**SCHEMATIC DIAGRAM**

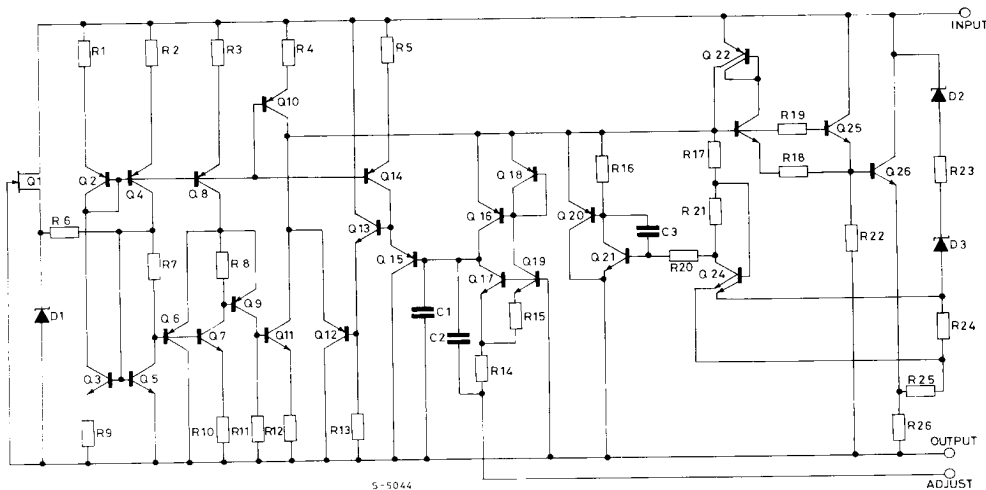

**THERMAL DATA**

			TO-3	TO-220
$R_{th\ j-case}$	Thermal resistance junction-case	max	4 °C/W	4 °C/W
$R_{th\ j-amb}$	Thermal resistance junction-ambient	max	35 °C/W	50 °C/W

**ELECTRICAL CHARACTERISTICS** ( $V_i - V_o = 5V$ ,  $I_o = 500\text{ mA}$ , unless otherwise specified)

Parameter	Test conditions		LM 117/LM 217			LM 317			Unit
			Min.	Typ.	Max.	Min.	Typ.	Max.	
$\Delta V_o$ Line regulation	$V_i - V_o = 3$ to $40V$	$T_j = 25^\circ C$		0.01	0.02		0.01	0.04	%/ $V$
				0.02	0.05		0.02	0.07	
$\Delta V_o$ Load regulation	$V_o \leq 5V$ $I_o = 10\text{ mA}$ to $1.5A$	$T_j = 25^\circ C$		5	15		5	25	mV
				20	50		20	70	
	$V_o \geq 5V$ $I_o = 10\text{ mA}$ to $1.5A$	$T_j = 25^\circ C$		0.1	0.3		0.1	0.5	%
				0.3	1		0.3	1.5	
$I_{ADJ}$ Adjustment pin current			50	100		50	100	$\mu A$	
$\Delta I_{ADJ}$ Adjustment pin current	$V_i - V_o = 2.5$ to $40V$ $I_o = 10\text{ mA}$ to $1.5A$			0.2	5		0.2	5	$\mu A$
$V_{REF}$ Reference voltage (between pin 3 and pin 1)	$V_i - V_o = 3$ to $40V$ $I_o = 10\text{ mA}$ to $1.5A$		1.2	1.25	1.3	1.2	1.25	1.3	V
$\frac{\Delta V_o}{V_o}$ Output voltage temperature stability				1			1		%
$I_{o\ min}$ Minimum load current	$V_i - V_o = 40V$			3.5	5		3.5	10	mA
$I_{o\ max}$ Maximum load current	$V_i - V_o \leq 15V$		1.5	2.2		1.5	2.2		A
	$V_i - V_o = 40V$			0.4			0.4		
$e_N$ Output noise (percentage of $V_o$ )	$T_j = 25^\circ C$ , 10Hz to 10KHz			0.003			0.003		%
SVR Supply voltage rejection (*)	$T_j = 25^\circ C$ $f = 120\text{ Hz}$	$C_{ADJ} = 0$		65			65		dB
		$C_{ADJ} = 10\ \mu F$	66	80		66	80		

(\*)  $C_{ADJ}$  is connected between pin 1 and ground.

**Note** — Unless otherwise specified the above specs, apply over the following conditions: LM 117  $T_j = -55$  to  $150^\circ C$ ; LM 217  $T_j = -25$  to  $150^\circ C$ ; LM 317  $T_j = 0$  to  $125^\circ C$ .

**LM117**  
**LM217**  
**LM317**

Fig. 1 - Output current vs. input-output differential voltage




Fig. 2 - Dropout voltage vs. junction temperature





Fig. 3 - Reference voltage vs. junction temperature




**APPLICATION INFORMATION**

The LM 117/LM 217/LM 317 provides an internal reference voltage of 1.25V between the output and adjustment terminals. This is used to set a constant current flow across an external resistor divider (see fig. 4), giving an output voltage  $V_o$  of:

$$V_o = V_{REF} \left( 1 + \frac{R_2}{R_1} \right) + I_{ADJ} R_2$$

Fig. 4 - Basic adjustable regulator



S-5045/1

The device was designed to minimize the term  $I_{ADJ}$  (100  $\mu\text{A}$  max) and to maintain it very constant with line and load changes. Usually, the error term  $I_{ADJ} \cdot R_2$  can be neglected. To obtain the previous requirement, all the regulator quiescent current is returned to the output terminal, imposing a minimum load current condition. If the load is insufficient, the output voltage will rise.

Since the LM 117/LM 217/LM 317 is a floating regulator and "sees" only the input-to-output differential voltage, supplies of very high voltage with respect to ground can be regulated as long as the maximum input-to-output differential is not exceeded. Furthermore, programmable regulator are easily obtainable and, by connecting a fixed resistor between the adjustment and output, the device can be used as a precision current regulator.

In order to optimise the load regulation, the current set resistor  $R_1$  (see fig. 4) should be tied as close as possible to the regulator, while the ground terminal of  $R_2$  should be near the ground of the load to provide remote ground sensing.


No external capacitors are required, but performance may be improved with added capacitance as follows:

- An input bypass capacitor of 0.1  $\mu\text{F}$ .
- An adjustment terminal to ground 10  $\mu\text{F}$  capacitor to improve the ripple rejection of about 15 dB ( $C_{ADJ}$ ).
- An 1  $\mu\text{F}$  tantalum capacitor on the output to improve transient response.

**APPLICATION INFORMATION** (continued)

In addition to external capacitors, it is good practice to add protection diodes, as shown in fig. 5.

Fig. 5 - Voltage regulator with protection diodes.

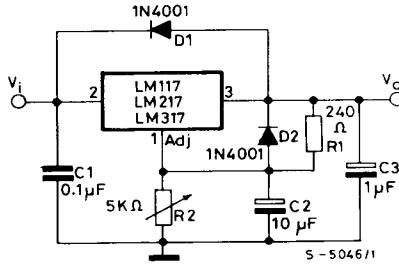

D1 protects the device against input short circuit, while D2 protects against output short circuit for capacitors discharging.

Fig. 6 - Slow turn-on 15V regulator

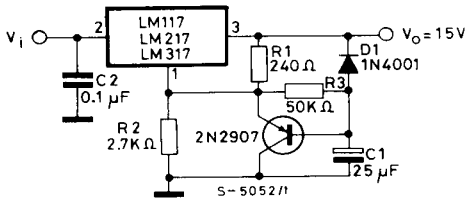


Fig. 7 - Current regulator




Fig. 8 - 5V electronic shut-down regulator



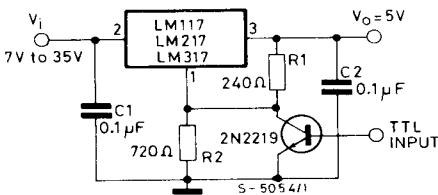


Fig. 9 - Digitally selected outputs

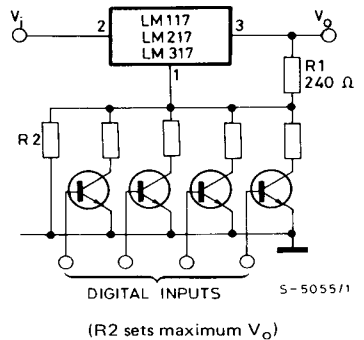

**APPLICATION INFORMATION (continued)**

**Fig. 10 - Battery charger (12V).**

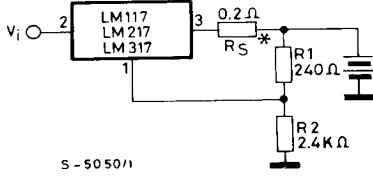


S-5050/1

\*  $R_S$  sets output impedance of charger

$$Z_o = R_s \left( 1 + \frac{R_2}{R_1} \right)$$

Use of  $R_S$  allows low charging rates with fully charged battery.

**Fig. 11 - Current limited 6V charger.**

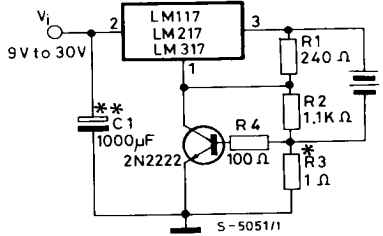


\*  $R_3$  sets peak current (0.6A for 1Ω).

\*\*  $C_1$  recommended to filter out input transients.

**MECHANICAL DATA (Dimensions in mm)**

**TO-220**



**TO-3**

