


Wild Thumper

HIGH POWER SWITCH

Mount on heatsink
if current is greater
than 10A

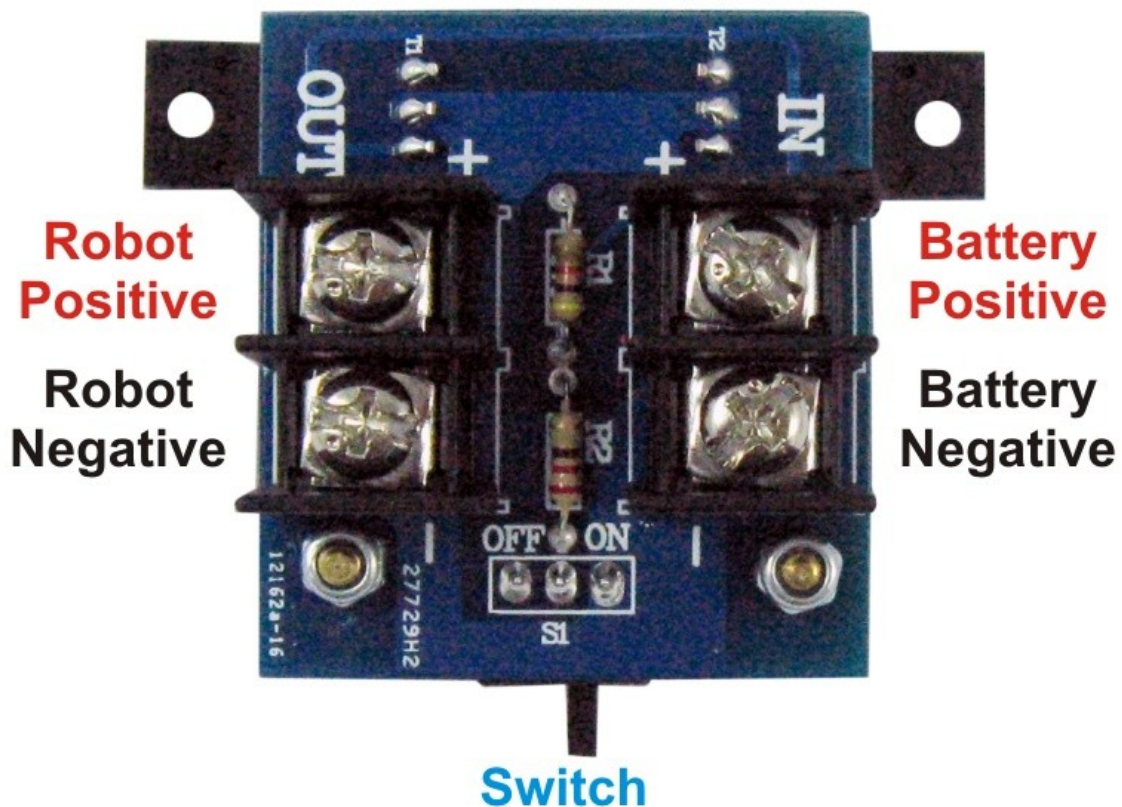

At the request of our customers we have now produced a high current, solid state switch for use with Wild Thumper products. Although designed specifically for the Wild Thumper chassis's this switch can be used with any robot that needs to switch high currents.

Solid state switches are small, quiet, have no moving parts and do not suffer from arcing, burnt contacts or fused contacts.

Specifications:

Battery voltage: 6V -20V

Current rating: 10A continuous – No heatsink

Current rating: 30A continuous – Chassis used as heatsink with heat transfer compound.

Current rating: 60A continuous – Heavy duty heatsink, fan and heat transfer compound.

When used with Wild Thumper chassis's the switch uses the aluminium chassis for a heatsink giving it a 30A continuous rating. Under normal operating conditions the 6WD chassis should only draw about half of this.

Mounting:

The FET's used on this switch are fully insulated to simplify the mounting procedure. A small amount of heat transfer compound should be applied prior to mounting the switch to ensure good heat dissipation.



When mounted as shown the switch is easily accessed and well protected.

