
HA12134A, HA12135A, HA12136A

Dolby B-Type Noise Reduction System

HITACHI

ADE-207-016B (Z)

3rd Edition
Jun. 1999

Description

The HA12134A, HA12135A, HA12136A are silicon monolithic bipolar IC series providing dual channel Dolby B-type noise reduction system* in one chip. The circuit is used primarily to reduce the level of background noise introduced during recording and playback of audio signals on magnetic tape.

HA12134A series provide the following functions and features.

Functions

- Dual Dolby B-type NR processor
- NR ON/OFF control switch.
- Record (encode)/playback (decode) control switch.

Features

- Separate record/playback input and output.
Unprocessed signal output available in the encode and decode modes.
- Reduction of external components count.
- Small capacitor value for the reference voltage.
- NR ON/OFF switching and REC/PB switching are provided internally.
- 2-type package (DP-16, FP-16DA)
- Wide range of operating supply voltage.


* Dolby is a trademark of Dolby Laboratories Licensing Corporation.
A license from Dolby Laboratories Licensing Corporation is required for the use of this IC.

HA12134A, HA12135A, HA12136A

Ordering Information

| Type No | Dolby Level (mVrms) | Package |
|-----------|---------------------|---------|
| HA12134A | 300 | DP-16 |
| HA12134AF | | FP-16DA |
| HA12135A | 450 | DP-16 |
| HA12135AF | | FP-16DA |
| HA12136A | 580 | DP-16 |
| HA12136AF | | FP-16DA |

Block Diagram

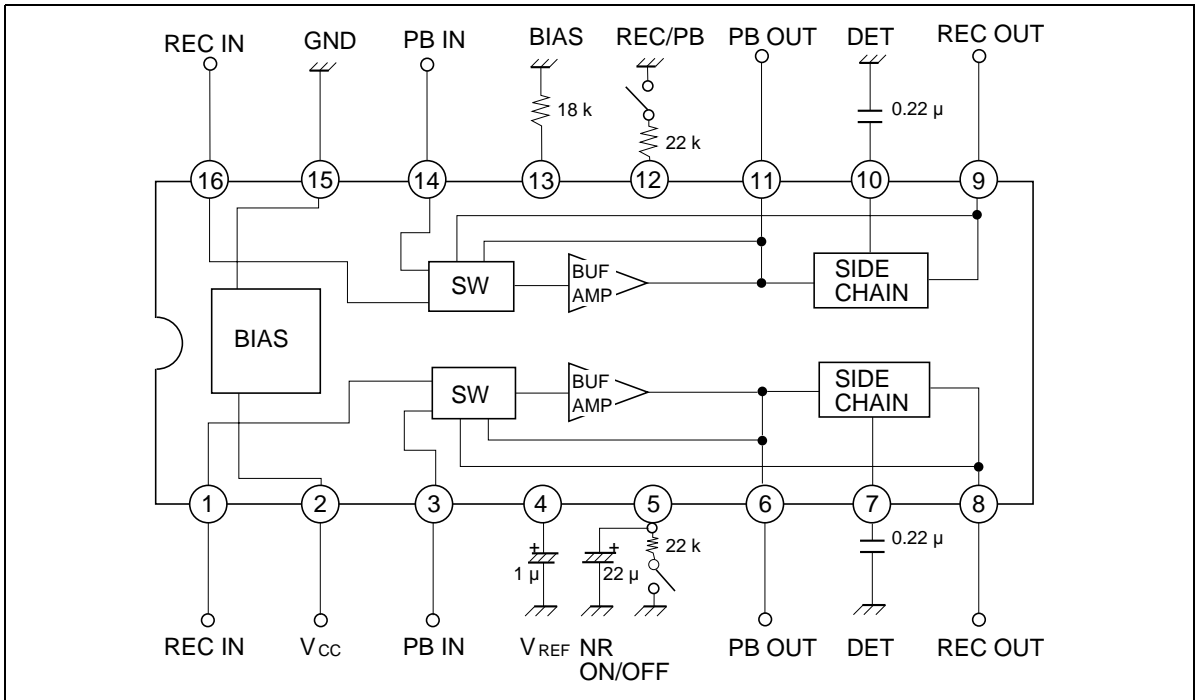

HA12134A, HA12135A, HA12136A



Absolute Maximum Ratings (Ta = 25°C, Unless otherwise specified.)

| Item | Symbol | Rating | Unit | Note |
|-----------------------|--------|-------------|------|-----------|
| Supply voltage | Vccmax | 16 | V | |
| Power dissipation | Pd | 250 | mW | Ta ≤ 85°C |
| Operating temperature | Topr | -40 to +85 | °C | |
| Storage temperature | Tstg | -55 to +125 | °C | |
| Lead temperature | TI | 260 | °C | Note 1 |

Note: 1. Soldering 10 sec.

HA12134A, HA12135A, HA12136A

Electrical Characteristics ($T_a = 25^\circ\text{C}$, $V_{cc} = 12\text{ V}$, Unless otherwise specified.)


| Item | Symbol | Min | Typ | Max | Unit | Test conditions | |
|--|------------------|------------------|------|----------|------|---|--|
| Operating voltage | HA12134A | Vo _{pe} | 6.5 | 12.0 | 16.0 | V | Enable functional operations |
| | HA12135A | | 8.0 | 12.0 | 16.0 | | |
| | HA12136A | | 9.5 | 12.0 | 16.0 | | |
| Quiescent current | I_Q | — | 7 | — | mA | No signal, REC NR-ON | |
| Voltage gain of input amp | HA12134A | G_{VIA} | 21.0 | 23.0 | 25.0 | dB | Pin 1→Pin 6 (Pin 16→Pin 11) V _{out} = 0 dB, f = 1 kHz |
| | HA12135A | | 24.5 | 26.5 | 28.5 | | |
| | HA12136A | | 26.5 | 28.5 | 30.5 | | |
| NR encode boost V 8 (9) (NR ON) V 8 (9) (NR OFF) | ENC-1.4 k (1) | 2.9 | 4.4 | 5.9 | dB | f = 1.4 kHz V 8 (9) (NR OFF) = -20 dB | |
| | ENC-1.4 k (2) | 6.0 | 7.5 | 9.0 | dB | f = 1.4 kHz V 8 (9) (NR OFF) = -30 dB | |
| | ENC-5 k (1) | 1.7 | 3.2 | 4.7 | dB | f = 5 kHz V 8 (9) (NR OFF) = -20 dB | |
| | ENC-5 k (2) | 6.7 | 8.2 | 9.7 | dB | f = 5 kHz V 8 (9) (NR OFF) = -30 dB | |
| | ENC-10 k (1) | -1.1 | 0.4 | 1.9 | dB | f = 10 kHz V 8 (9) (NR OFF) = 0 dB | |
| | ENC-10 k (2) | 9.8 | 10.4 | 11.8 | dB | f = 10 kHz V 8 (9) (NR OFF) = -40 dB | |
| T.H.D (REC) | T.H.D (REC) | — | 0.05 | 0.3 | % | f = 1 kHz V 8 (9) (NR ON) = 0 dB | |
| Signal handling | HA12134A | Vomax | 12.0 | 13.0 | — | dB | f = 1 kHz, $V_{cc} = 6.5\text{ V}$ |
| | HA12135A | (REC) | | | | | T.H.D = 1% $V_{cc} = 8.0\text{ V}$ |
| | HA12136A | | | | | | $V_{cc} = 9.5\text{ V}$ |
| Signal/noise ratio (REC) | S/N (REC) | 62.0 | 68.0 | — | dB | R _g = 5.1 kΩ weighted CCIR/ARM | |
| Crosstalk (ENC) (Pin 8 – Pin 9) | CT R→L L→R | 52.0 | 60.0 | — | dB | f = 1 kHz NR OFF | |
| Control voltage for REC/PB | REC | 2.5 | — | V_{cc} | V | REC/PB  | |
| | PB | 0.0 | — | 0.5 | | | |
| Control voltage for NR ON/OFF | ON | 2.5 | — | V_{cc} | V | NR ON/OFF  | |
| | OFF | 0.0 | — | 0.5 | | | |
| Channel balance | ΔG_{VIA} | -1.0 | 0.0 | 1.0 | dB | | |

HA12134A, HA12135A, HA12136A

Electrical Characteristics ($T_a = 25^\circ\text{C}$, $V_{cc} = 12\text{ V}$, Unless otherwise specified.) (cont)

| Item | Symbol | Min | Typ | Max | Unit | Test conditions |
|---|-------------------|-----|-----|-----|------|--------------------------------------|
| Offset voltage V 8 (9) (NR-ON) – V 8 (9) (NR-OFF) | ΔV_{orec} | -50 | 0.0 | 50 | mV | REC mode $V_{cc} = 16.0\text{ V}$ |

Test Circuit

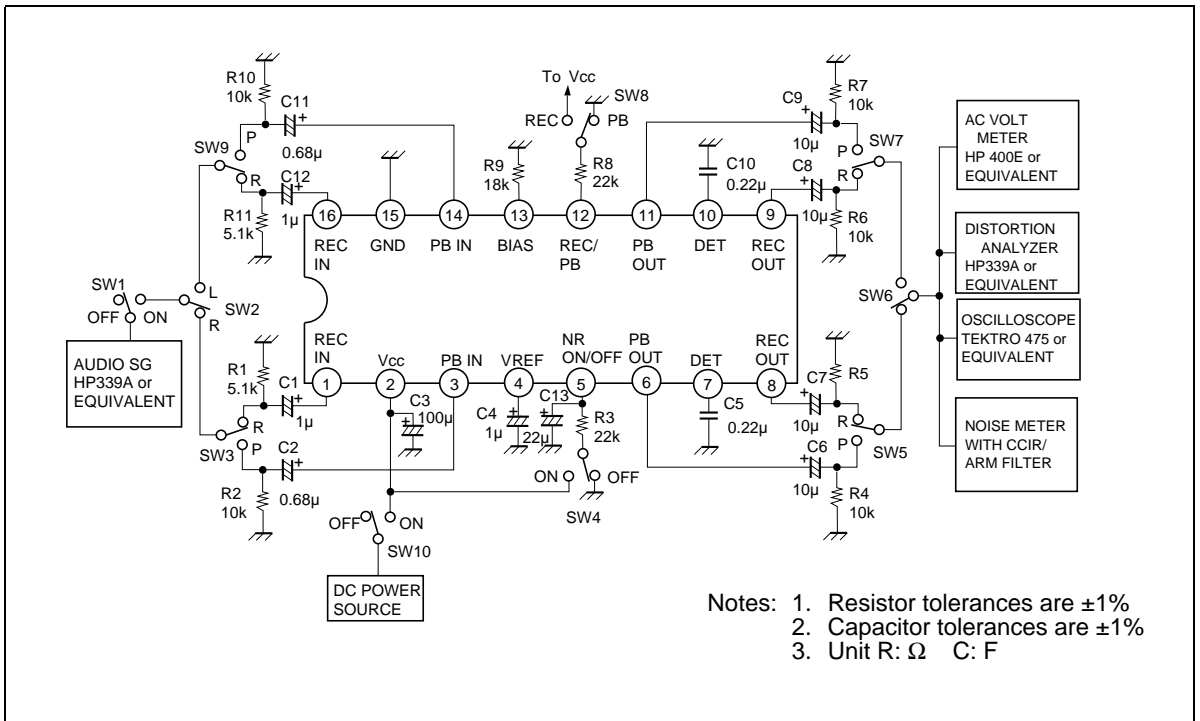

HA12134A, HA12135A, HA12136A

Pin Description ($T_a = 25^\circ\text{C}$, $V_{CC} = 12\text{ V}$, No signal, The value in the table show typical value.)

| Pin No. | Symbol | R (in) | VDC | Equivalent circuit | Description |
|---------|-----------|----------------|--------|--------------------|---|
| 1, 16 | REC IN | 56 k Ω | 6.0 V | | Recording (encode) input |
| 2 | V_{CC} | — | 12.0 V | | Power supply |
| 3, 14 | PB IN | 100 k Ω | 6.0 V | | Playback (decode) input |
| 4 | V_{REF} | — | 6.0 V | | Reference voltage |
| 5 | NR ON/OFF | — | — | | Mode control pin for NR ON/OFF "H" → NR ON "L" → NR OFF |
| 6, 11 | PB OUT | — | 6.0 V | | Playback (decode) output |

HA12134A, HA12135A, HA12136A

Pin Description ($T_a = 25^\circ\text{C}$, $V_{CC} = 12\text{ V}$, No signal, The value in the table show typical value.) (cont)

| Pin No. | Symbol | R (in) | VDC | Equivalent circuit | Description |
|---------|---------|--------|-------|--------------------|--|
| 7, 10 | DET | — | 1.3 V | | Time constant pin for the level detector |
| 8, 9 | REC OUT | — | 6.0 V | | Recording (encode) output |
| 12 | REC/PB | — | — | | Mode control pin for REC/PB (encode/decode) “H” → REC (encode) “L” → PB (decode) |
| 13 | BIAS | — | 1.0 V | | Reference current input pin for the active filters |
| 15 | GND | — | 0 V | — | Ground |

HA12134A, HA12135A, HA12136A

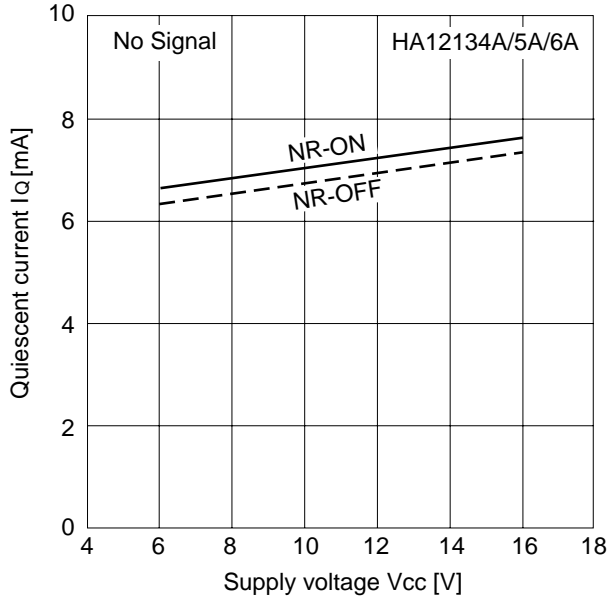


Figure 1 Quiescent Current vs. Supply Voltage

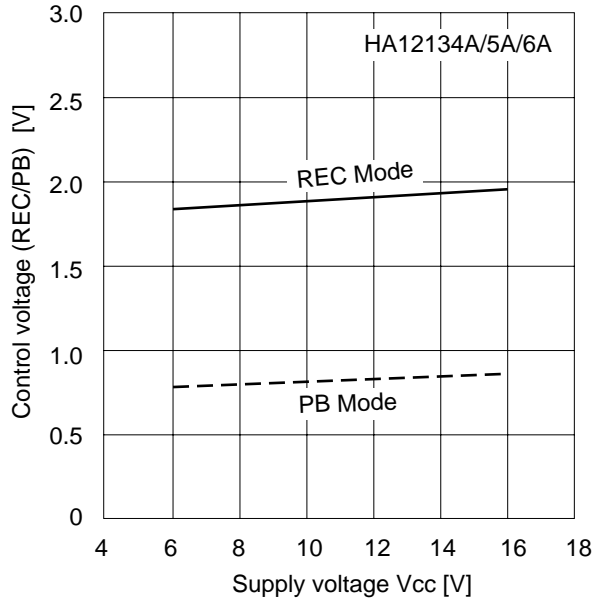


Figure 2 REC/PB Control Voltage vs. Supply Voltage

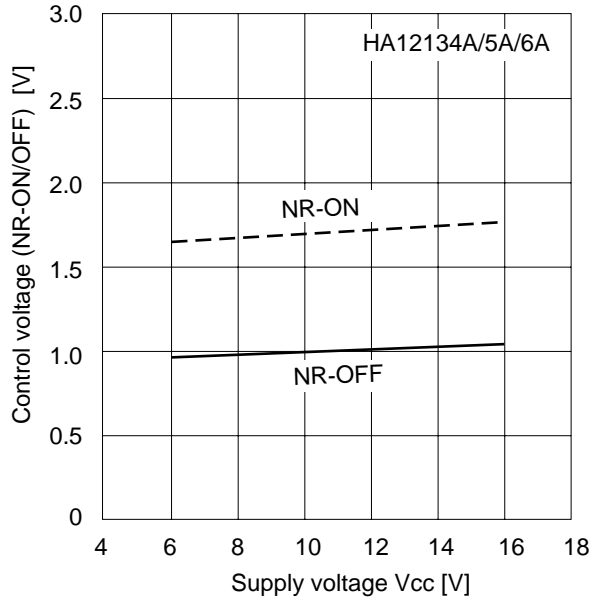


Figure 3 NR-ON/OFF Control Voltage vs. Supply Voltage

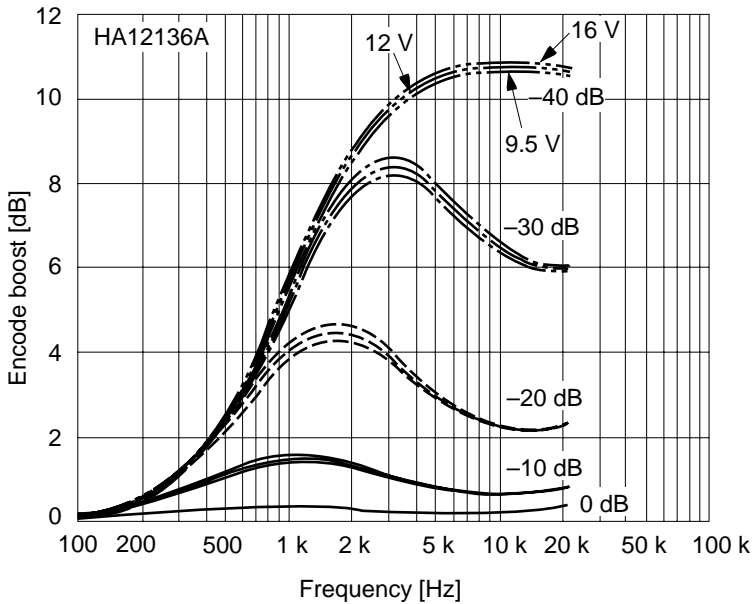


Figure 4 Encode Boost vs. Frequency

HA12134A, HA12135A, HA12136A

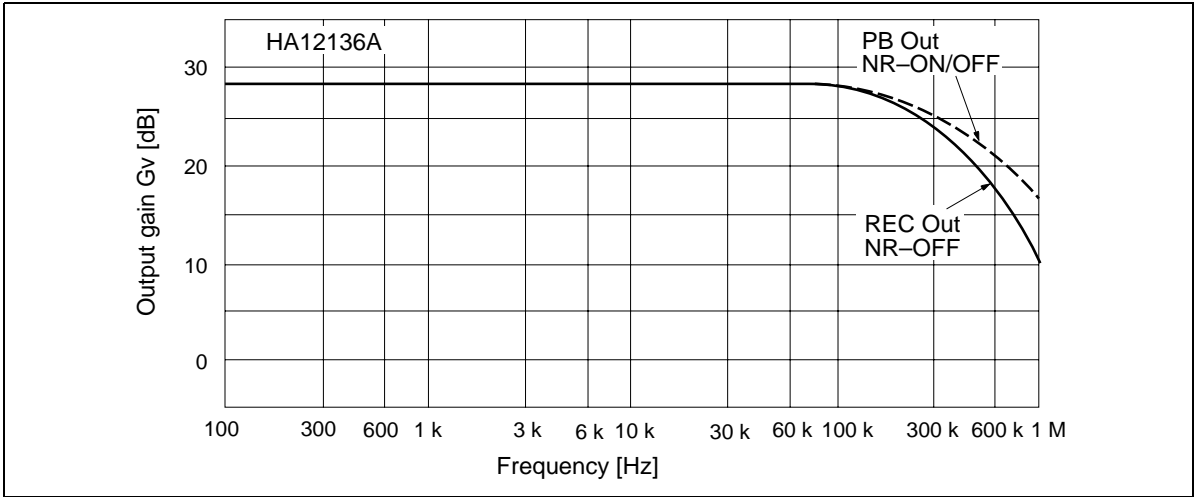


Figure 5 REC Mode Output Gain vs. Frequency

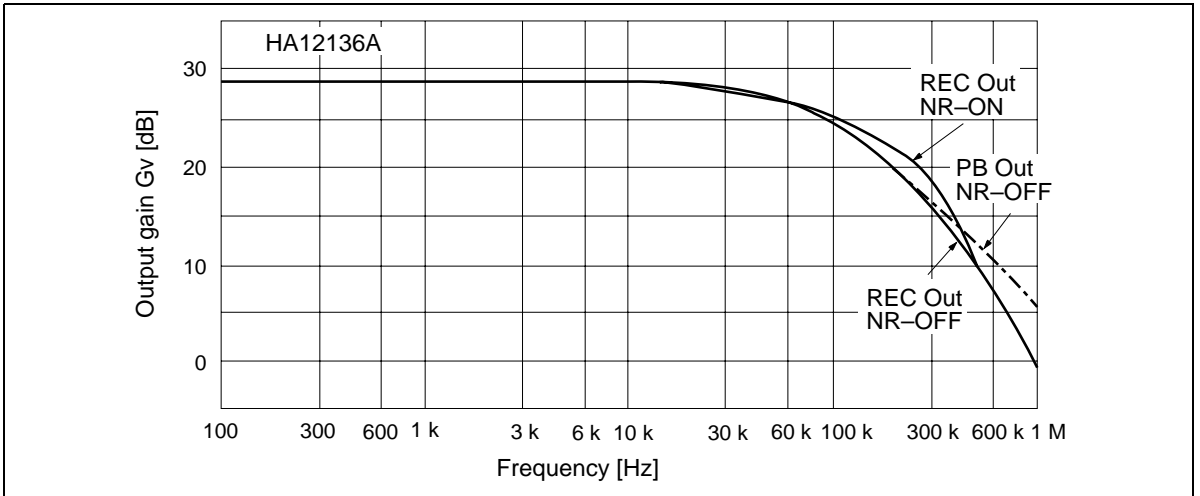


Figure 6 PB Mode Output Gain vs. Frequency

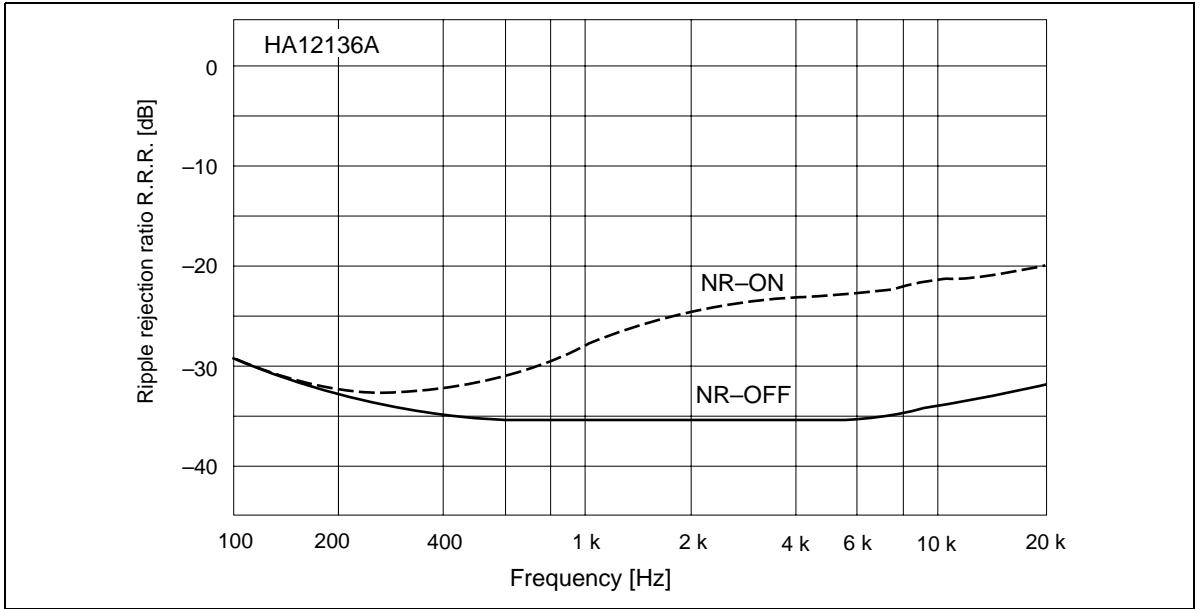


Figure 7 REC Mode Ripple Rejection Ratio vs. Frequency

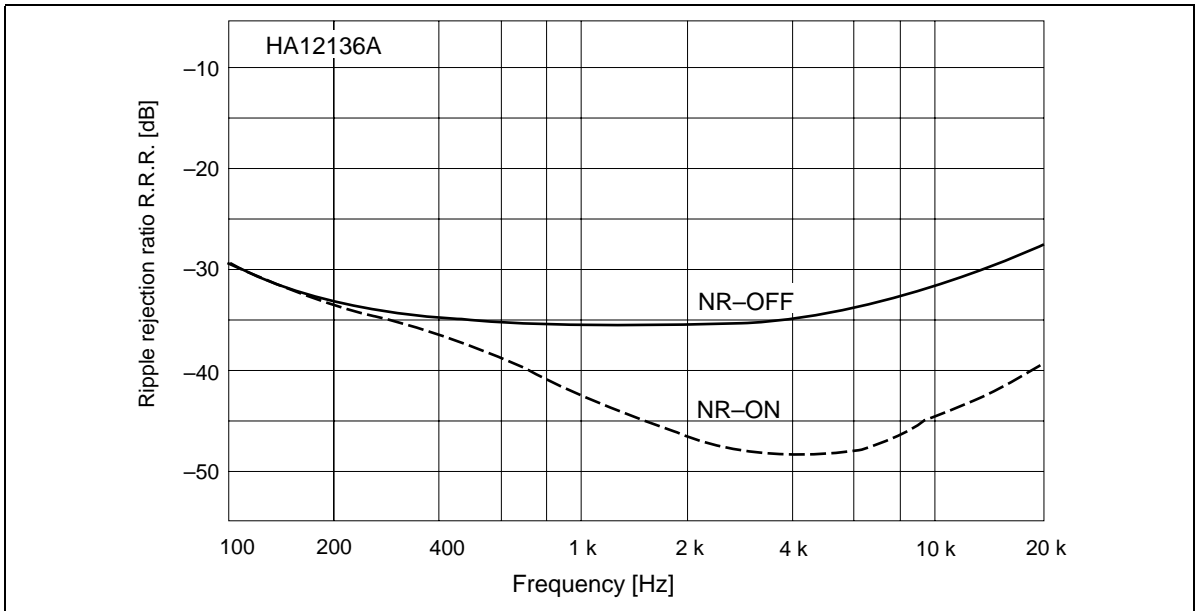


Figure 8 PB Mode Ripple Rejection Ratio vs. Frequency

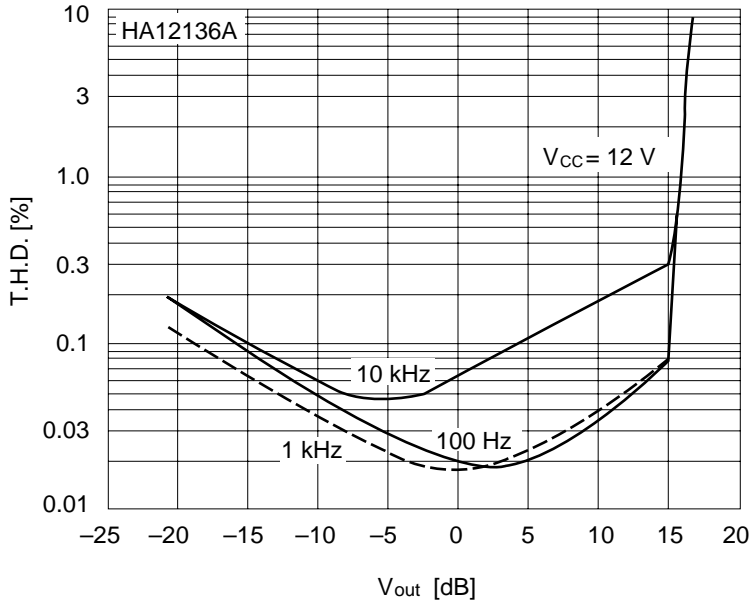


Figure 9 REC NR-OFF Total Harmonic Distortion vs. Output Level

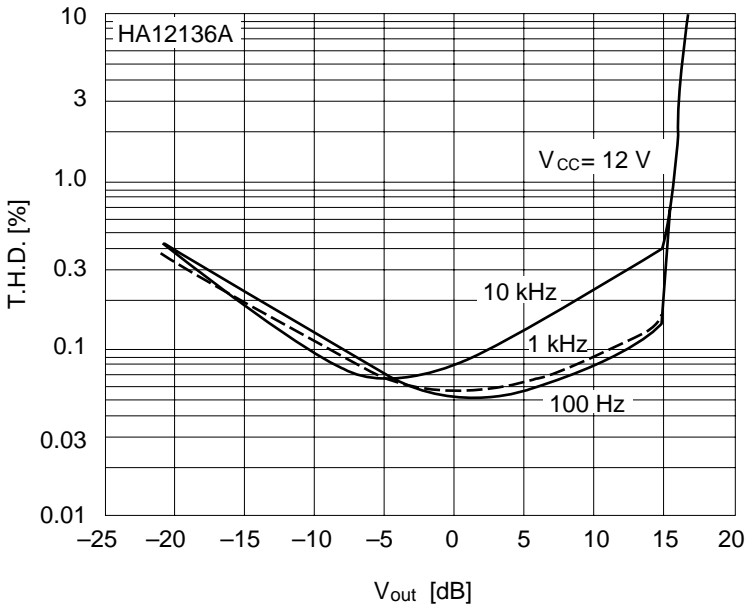


Figure 10 REC NR-ON Total Harmonic Distortion vs. Output Level

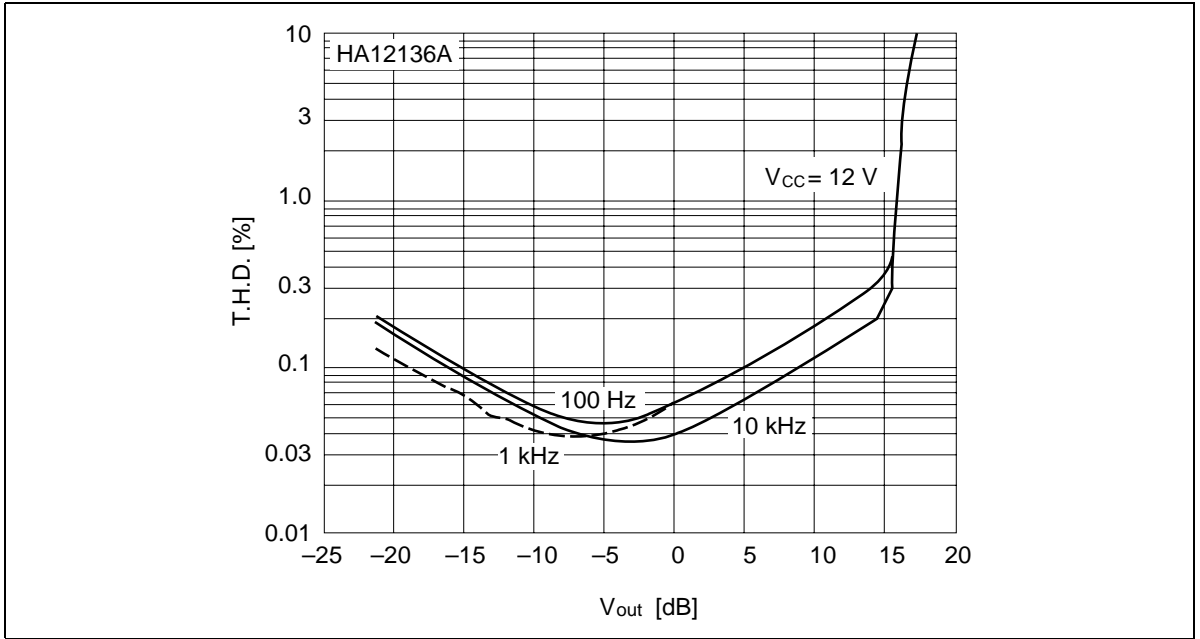


Figure 11 PB NR-OFF Total Harmonic Distortion vs. Output Level

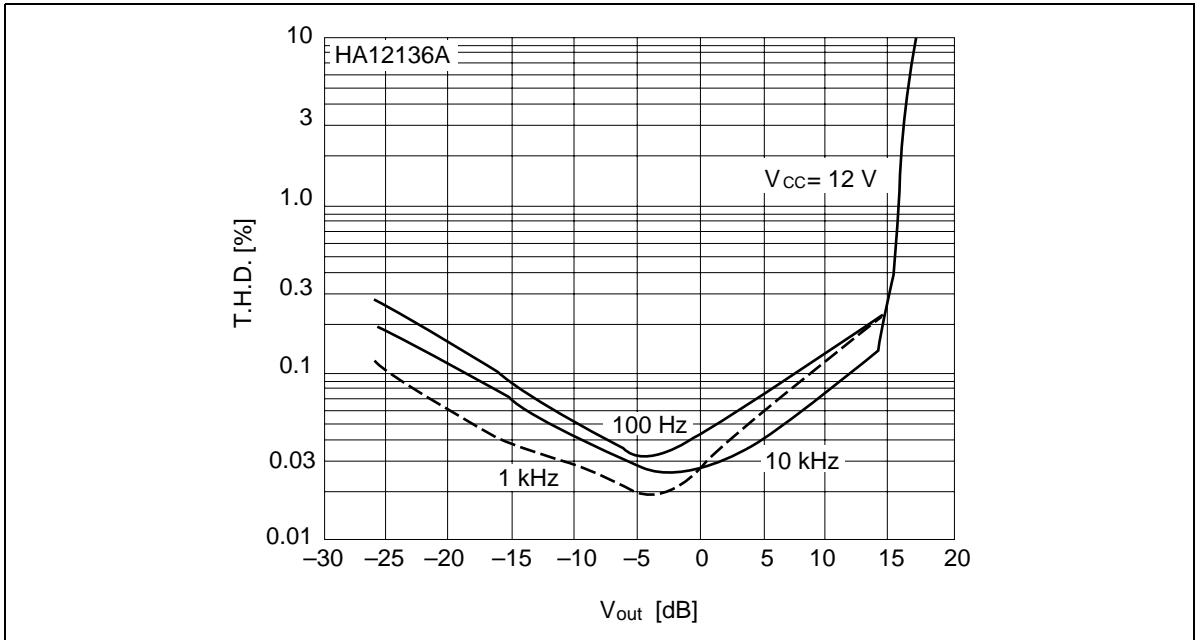


Figure 12 PB NR-ON Total Harmonic Distortion vs. Output Level

HA12134A, HA12135A, HA12136A

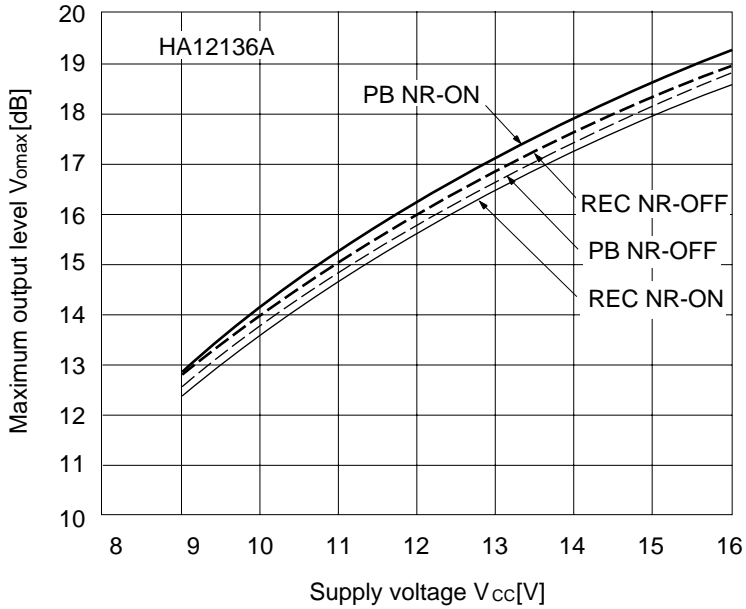


Figure 13 Maximum Output Level vs. Supply Voltage

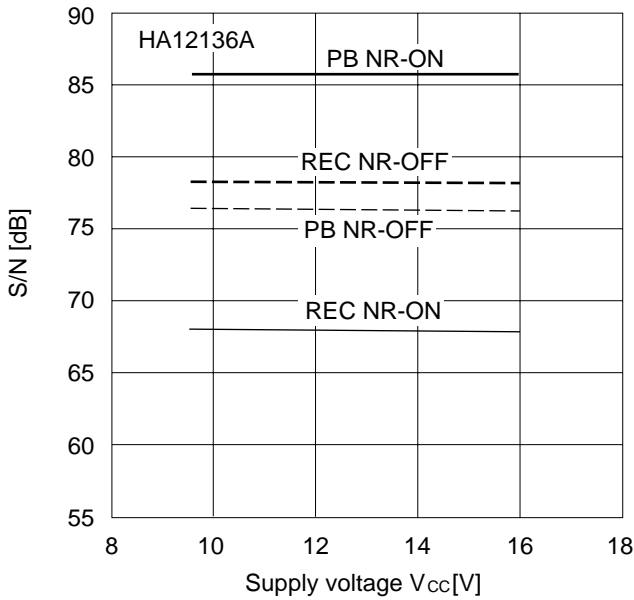


Figure 14 REC/PB Signal To Noise Ratio vs. Supply Voltage

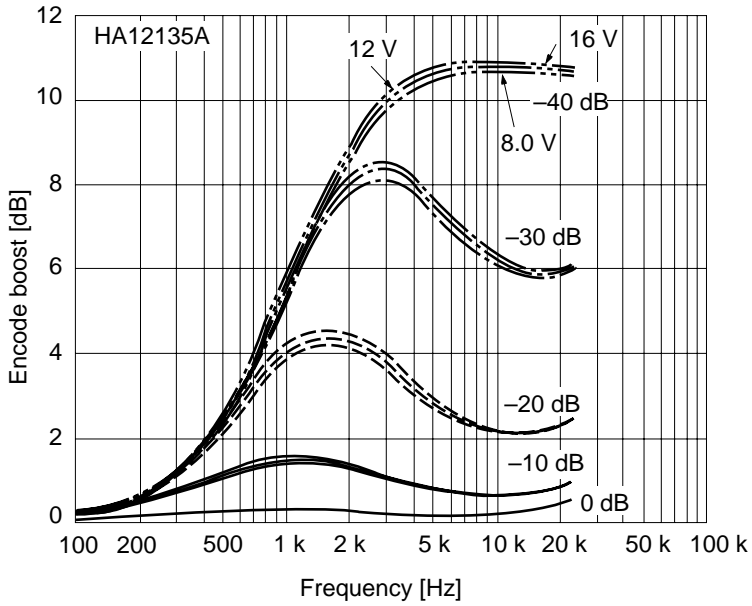


Figure 15 Encode Boost vs. Frequency

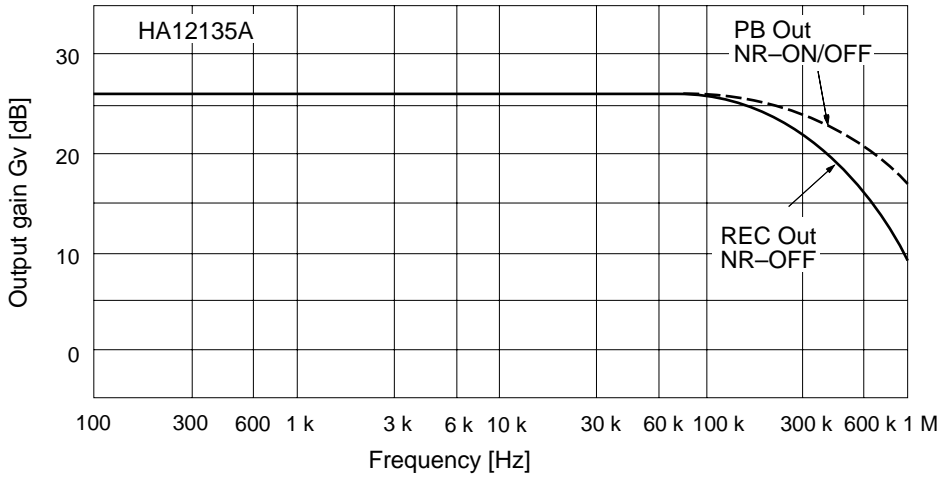


Figure 16 REC Mode Output Gain vs. Frequency

HA12134A, HA12135A, HA12136A

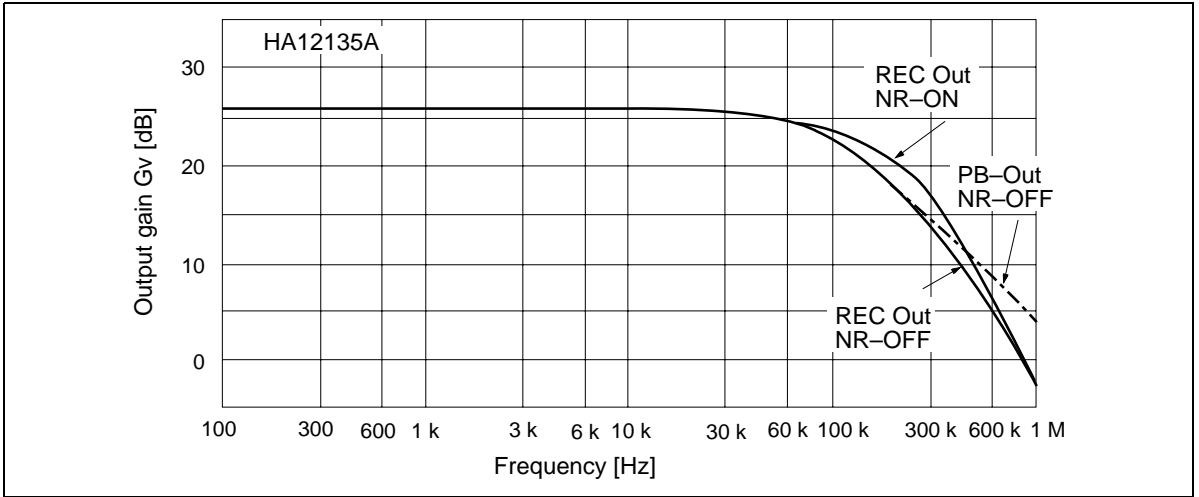


Figure 17 PB Mode Output Gain vs. Frequency

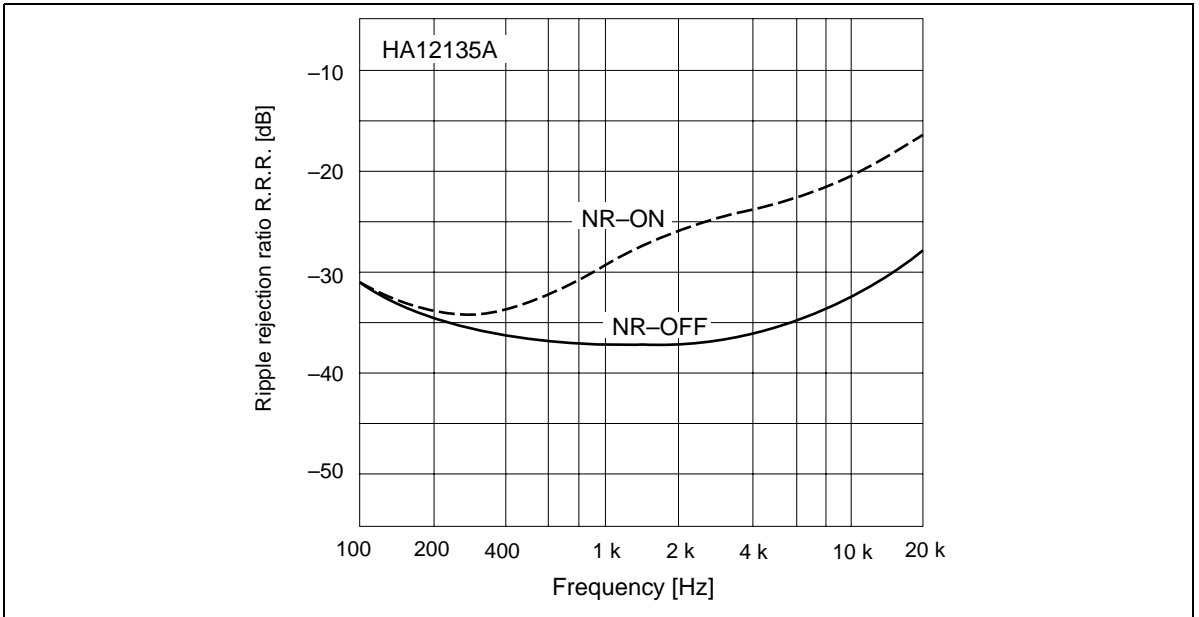


Figure 18 REC Mode Ripple Rejection Ratio vs. Frequency

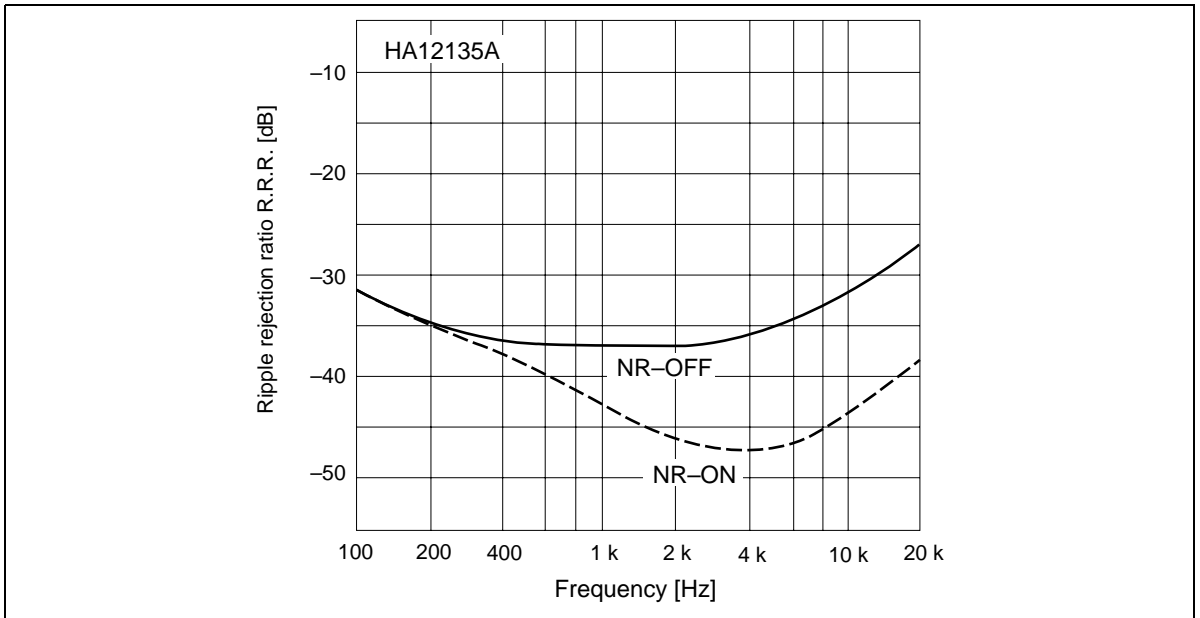


Figure 19 PB Mode Ripple Rejection Ratio vs. Frequency

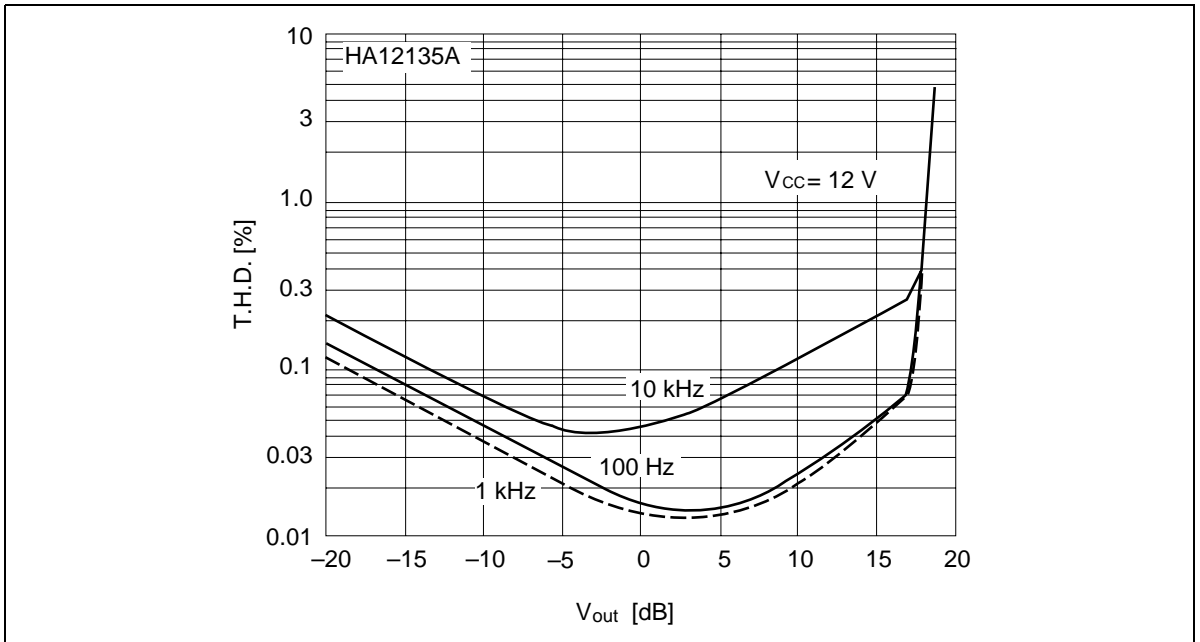


Figure 20 REC NR-OFF Total Harmonic Distortion vs. Output Level

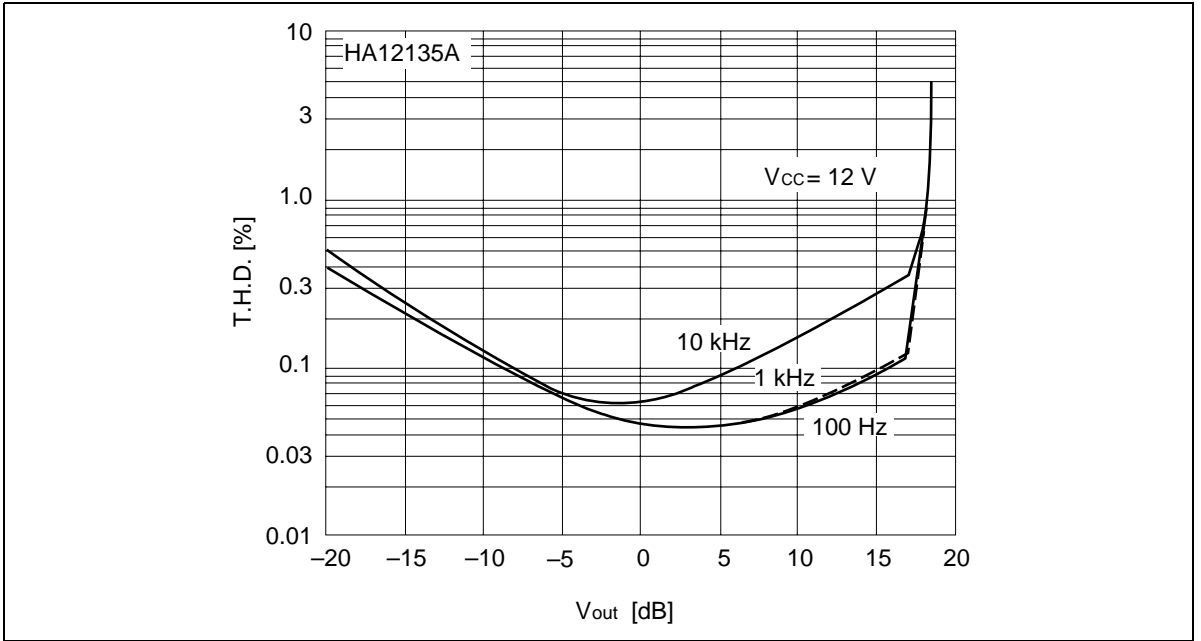


Figure 21 REC NR-ON total Harmonic Distortion vs. Output Level

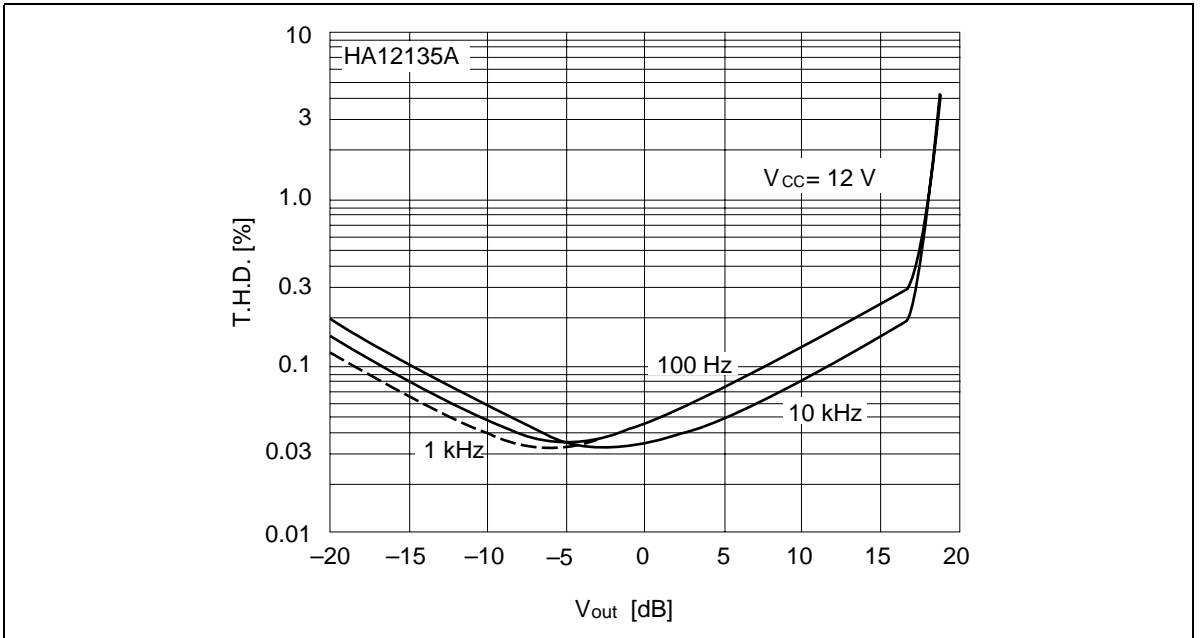


Figure 22 PB NR-OFF Total Harmonic Distortion vs. Output Level

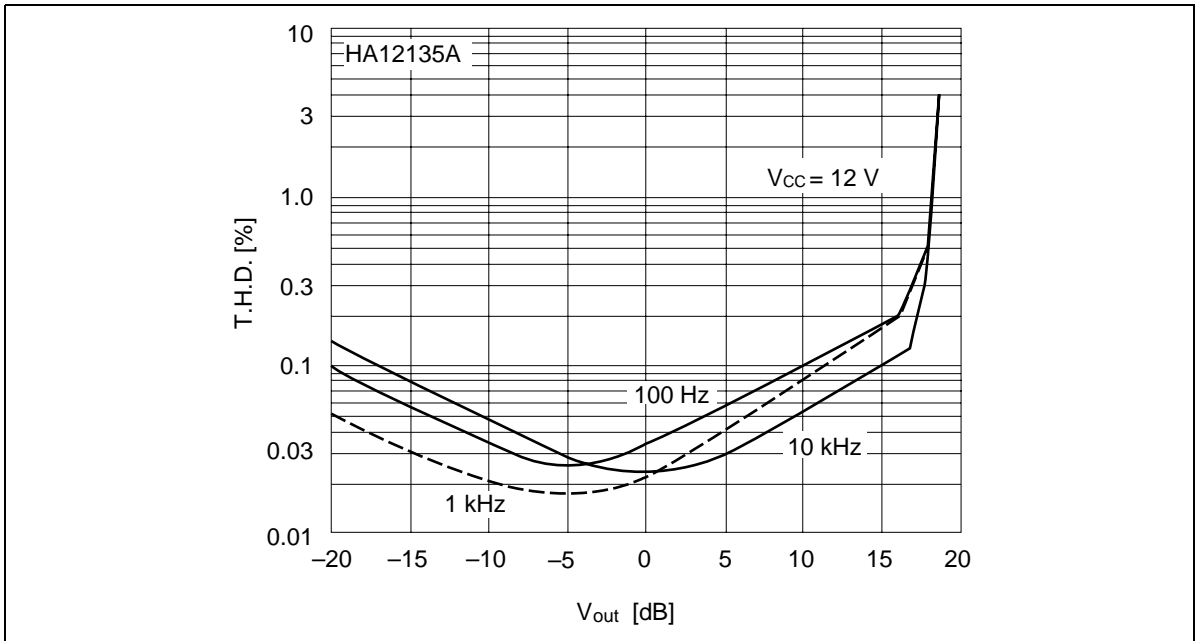


Figure 23 PB NR-ON Total Harmonic Distortion vs. Output Level

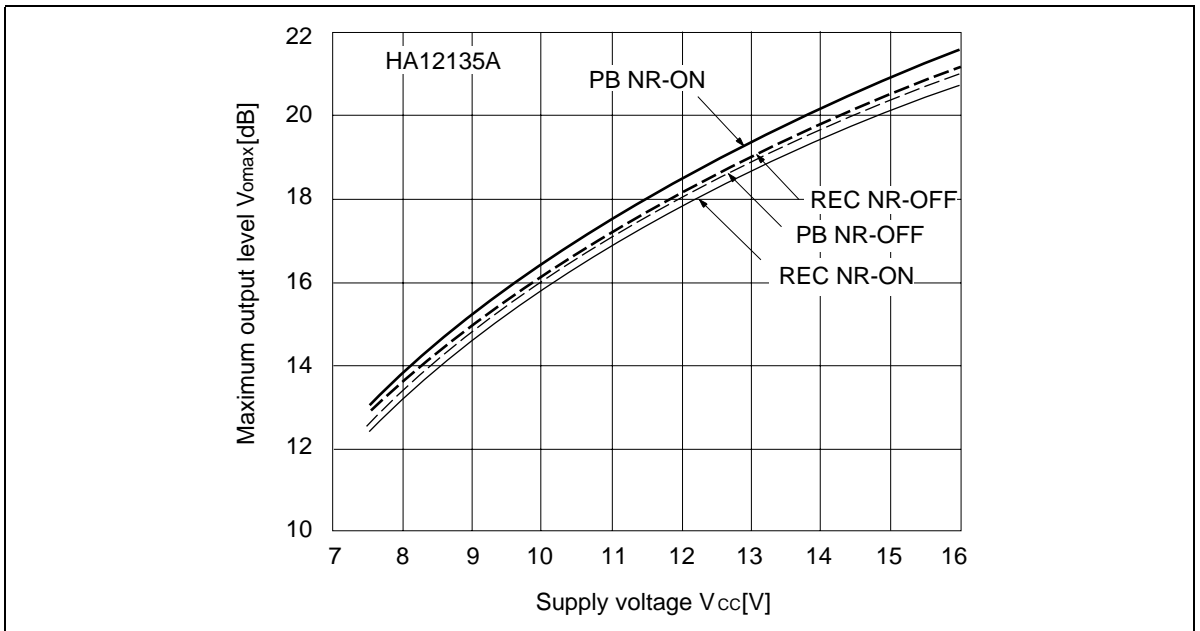


Figure 24 Maximum Output Level vs. Supply Voltage

HA12134A, HA12135A, HA12136A

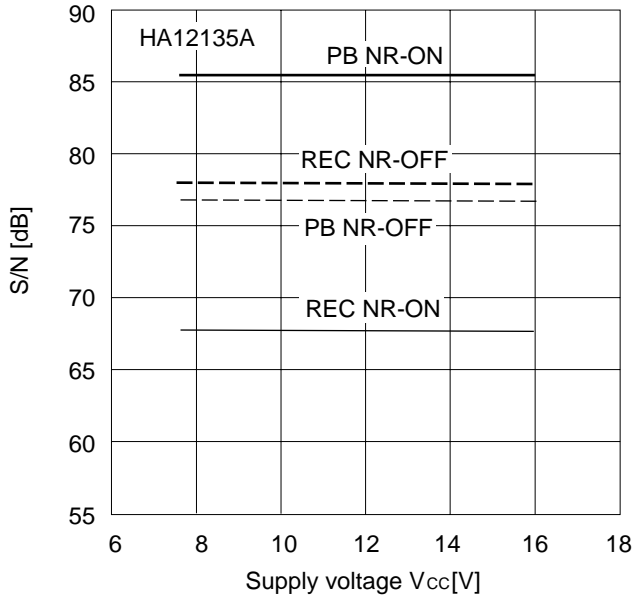


Figure 25 REC/PB Signal to Noise Ratio vs. Supply Voltage

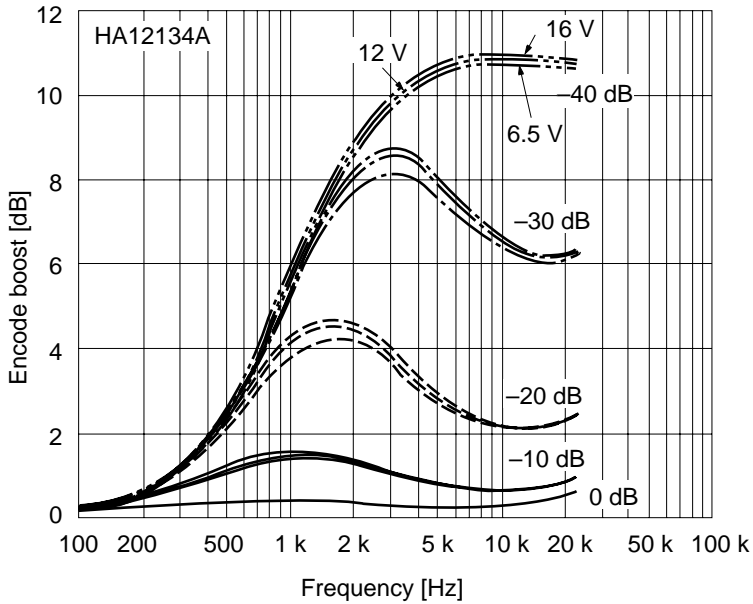


Figure 26 Encode Boost vs. Frequency

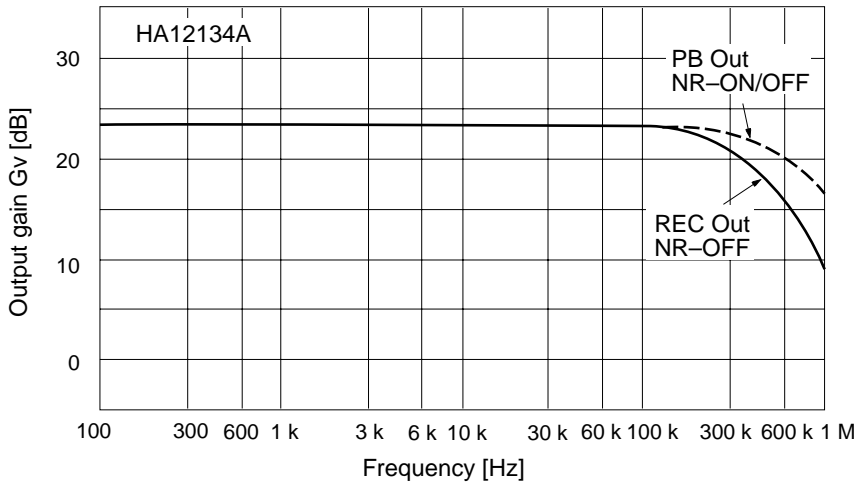


Figure 27 REC Mode Output Gain vs. Frequency

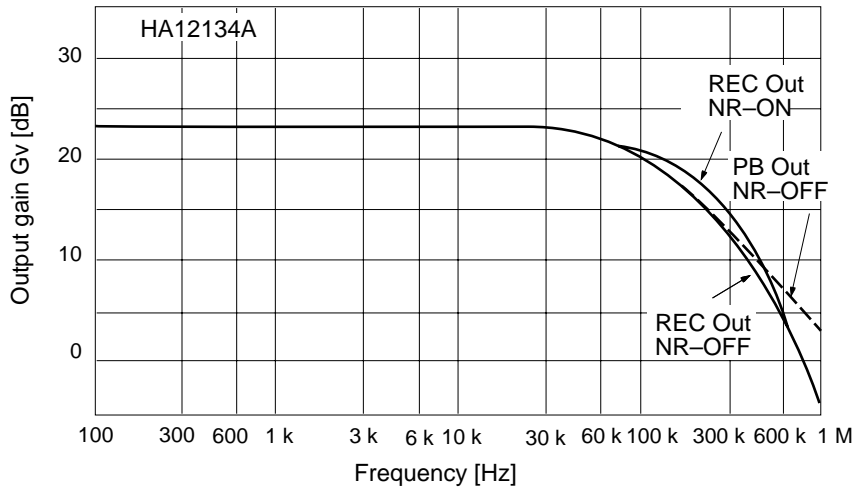


Figure 28 PB Mode Output Gain vs. Frequency

HA12134A, HA12135A, HA12136A

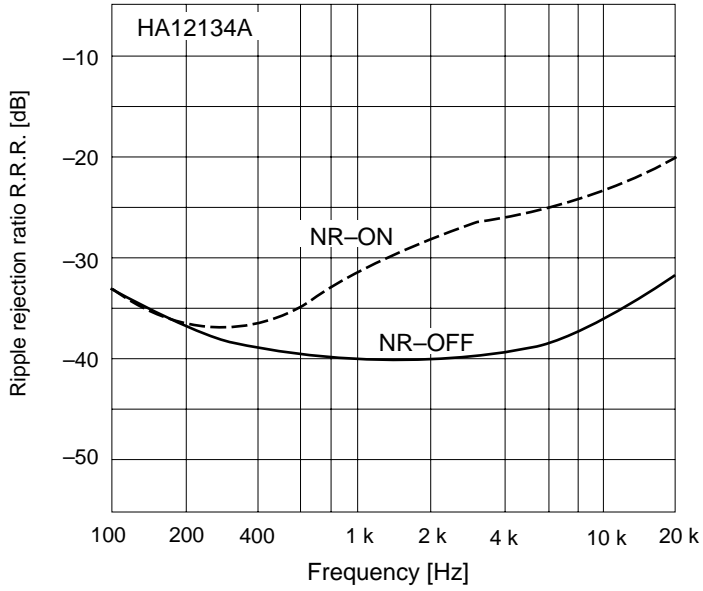


Figure 29 REC Mode Ripple Rejection Ratio vs. Frequency

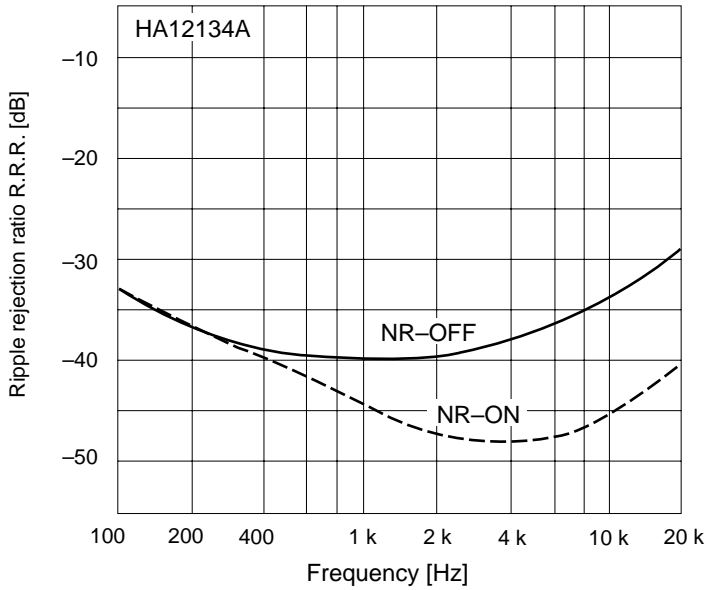


Figure 30 PB Mode Ripple Rejection Ratio vs. Frequency

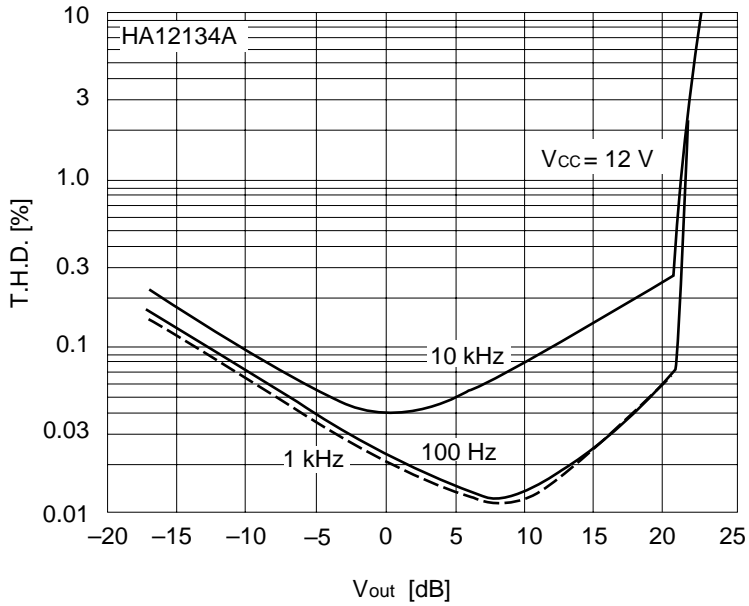


Figure 31 REC NR-OFF Total Harmonic Distortion vs. Output Level

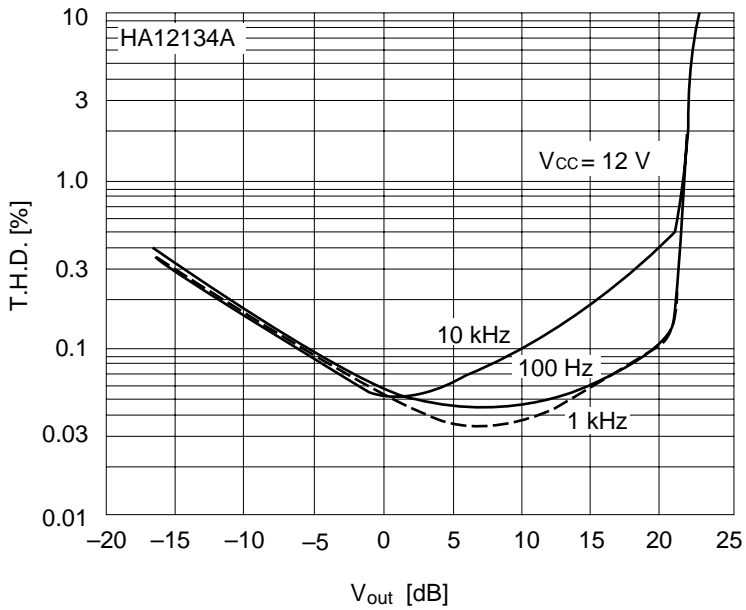


Figure 32 REC NR-ON Total Harmonic Distortion vs. Output Level

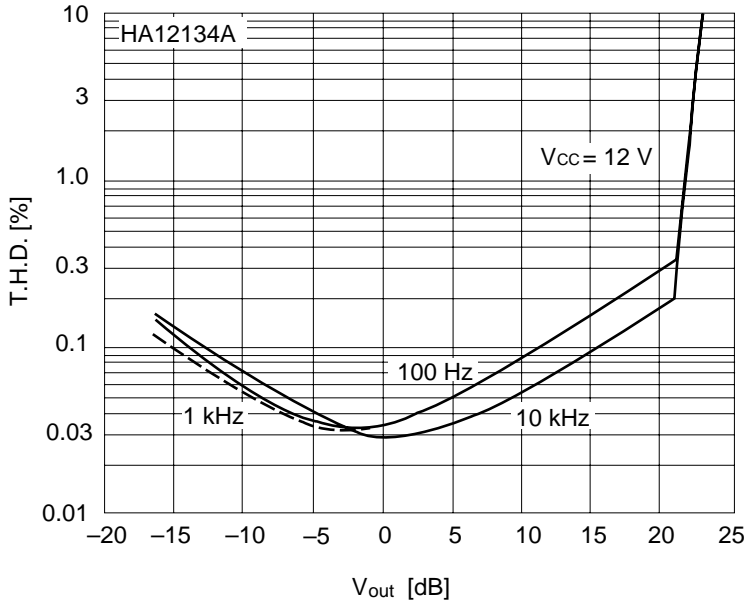


Figure 33 PB NR-OFF Total Harmonic Distortion vs. Output Level

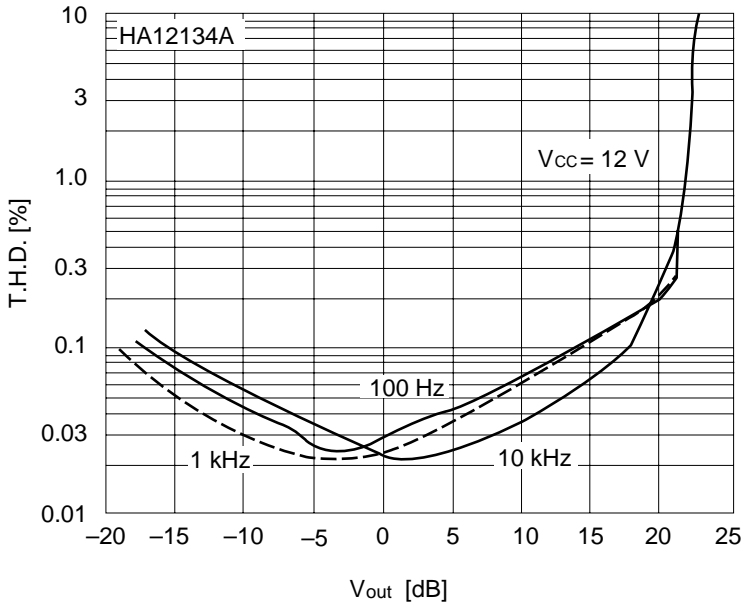


Figure 34 PB NR-ON Total Harmonic Distortion vs. Output Level

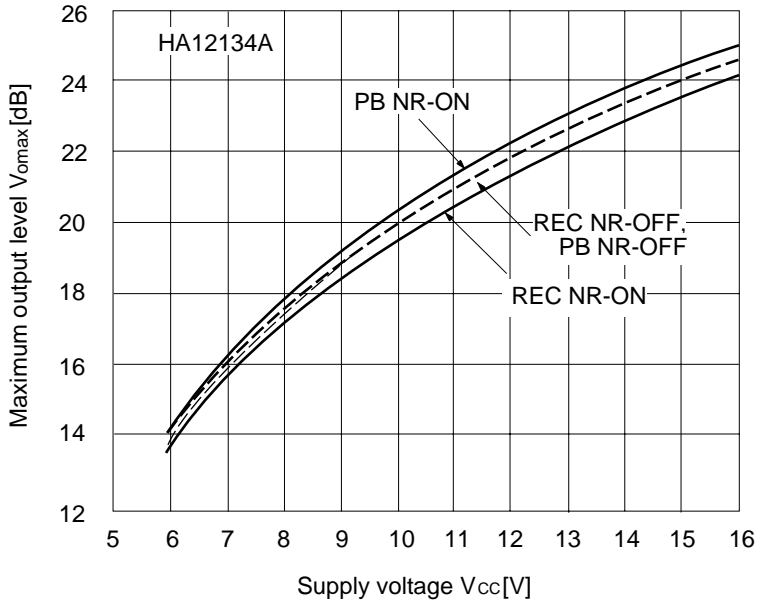


Figure 35 Maximum Output Level vs. Supply Voltage



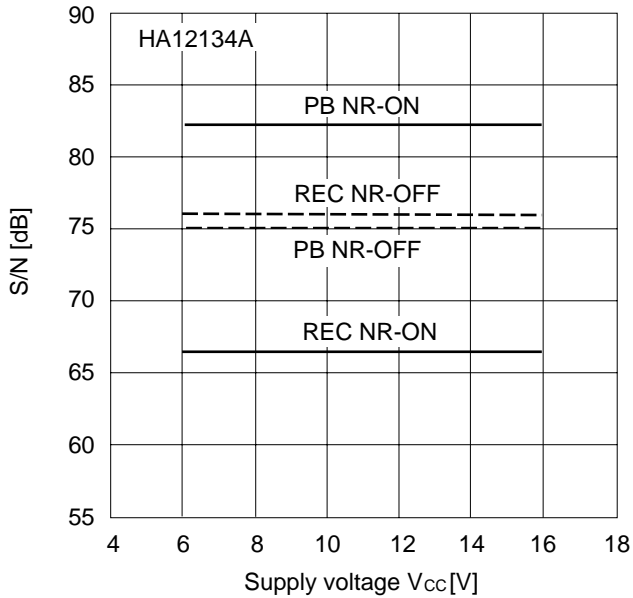


Figure 36 REC/PB Signal To Noise Ratio vs. Supply Voltage

HA12134A, HA12135A, HA12136A

Package Dimensions

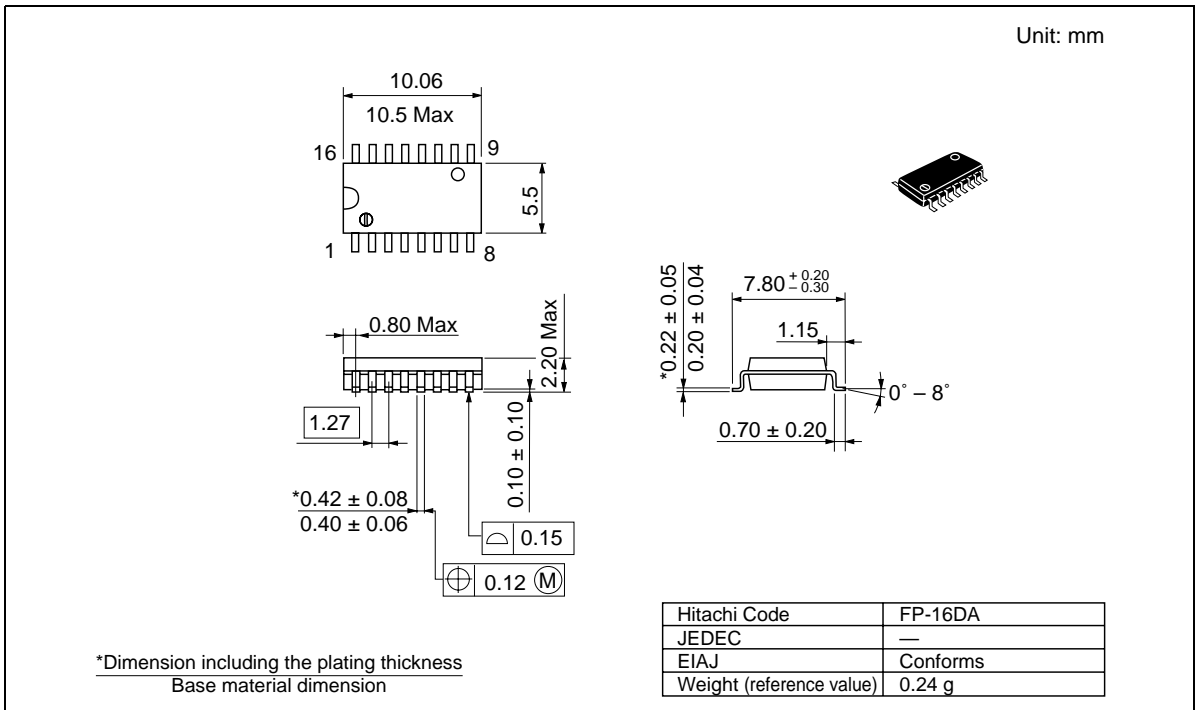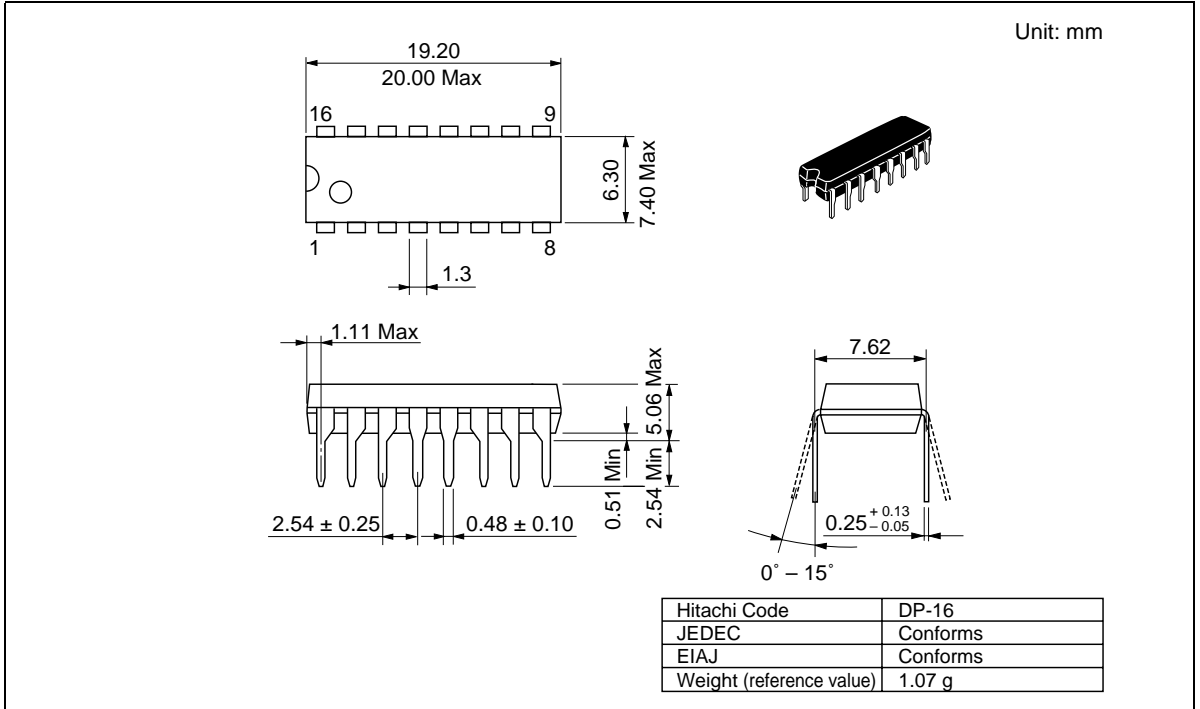

Disclaimer

1. Hitachi neither warrants nor grants licenses of any rights of Hitachi's or any third party's patent, copyright, trademark, or other intellectual property rights for information contained in this document. Hitachi bears no responsibility for problems that may arise with third party's rights, including intellectual property rights, in connection with use of the information contained in this document.
2. Products and product specifications may be subject to change without notice. Confirm that you have received the latest product standards or specifications before final design, purchase or use.
3. Hitachi makes every attempt to ensure that its products are of high quality and reliability. However, contact Hitachi's sales office before using the product in an application that demands especially high quality and reliability or where its failure or malfunction may directly threaten human life or cause risk of bodily injury, such as aerospace, aeronautics, nuclear power, combustion control, transportation, traffic, safety equipment or medical equipment for life support.
4. Design your application so that the product is used within the ranges guaranteed by Hitachi particularly for maximum rating, operating supply voltage range, heat radiation characteristics, installation conditions and other characteristics. Hitachi bears no responsibility for failure or damage when used beyond the guaranteed ranges. Even within the guaranteed ranges, consider normally foreseeable failure rates or failure modes in semiconductor devices and employ systemic measures such as fail-safes, so that the equipment incorporating Hitachi product does not cause bodily injury, fire or other consequential damage due to operation of the Hitachi product.
5. This product is not designed to be radiation resistant.
6. No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without written approval from Hitachi.
7. Contact Hitachi's sales office for any questions regarding this document or Hitachi semiconductor products.

Sales Offices

HITACHI**Hitachi, Ltd.**

Semiconductor & Integrated Circuits.

Nippon Bldg., 2-6-2, Ohte-machi, Chiyoda-ku, Tokyo 100-0004, Japan

Tel: Tokyo (03) 3270-2111 Fax: (03) 3270-5109

| | | |
|-----|------------------|---|
| URL | NorthAmerica | : http://semiconductor.hitachi.com/ |
| | Europe | : http://www.hitachi-eu.com/hel/ecg |
| | Asia (Singapore) | : http://www.has.hitachi.com.sg/grp3/sicd/index.htm |
| | Asia (Taiwan) | : http://www.hitachi.com.tw/E/Product/SICD_Frame.htm |
| | Asia (HongKong) | : http://www.hitachi.com.hk/eng/bo/grp3/index.htm |
| | Japan | : http://www.hitachi.co.jp/Sicd/indx.htm |

For further information write to:

Hitachi Semiconductor
(America) Inc.
179 East Tasman Drive,
San Jose, CA 95134
Tel: <1> (408) 433-1990
Fax: <1> (408) 433-0223

Hitachi Europe GmbH
Electronic components Group
Dornacher Straße 3
D-85622 Feldkirchen, Munich
Germany
Tel: <49> (89) 9 9180-0
Fax: <49> (89) 9 29 30 00

Hitachi Europe Ltd.
Electronic Components Group.
Whitebrook Park
Lower Cookham Road
Maidenhead
Berkshire SL6 8YA, United Kingdom
Tel: <44> (1628) 585000
Fax: <44> (1628) 778322

Hitachi Asia Pte. Ltd.
16 Collyer Quay #20-00
Hitachi Tower
Singapore 049318
Tel: 535-2100
Fax: 535-1533

Hitachi Asia Ltd.
Taipei Branch Office
3F, Hung Kuo Building, No.167,
Tun-Hwa North Road, Taipei (105)
Tel: <886> (2) 2718-3666
Fax: <886> (2) 2718-8180

Hitachi Asia (Hong Kong) Ltd.
Group III (Electronic Components)
7/F., North Tower, World Finance Centre,
Harbour City, Canton Road, Tsim Sha Tsui,
Kowloon, Hong Kong
Tel: <852> (2) 735 9218
Fax: <852> (2) 730 0281
Telex: 40815 HITEC HX

Copyright ' Hitachi, Ltd., 1998. All rights reserved. Printed in Japan.