

SANYO**LB1838M****Low-saturation, Bidirectional Motor Driver
for Low-voltage Applications****Overview**


The LB1838M is a low-saturation two-channel bidirectional motor driver IC for use in low-voltage applications.
The LB1838M is a bipolar stepper-motor driver IC that is ideal for use in printers, FDDs, cameras and other portable devices.

Features

- Low voltage operation (2.5 V min)
- Low saturation voltage (upper transistor + lower transistor residual voltage: 0.40 V at 400 mA).
- Through-current prevention circuit built in
- Separate logic power supply and motor power supply
- Spark killer diodes built in
- Thermal shutdown circuit built in
- Compact package (14-pin MFP)

Package Dimensions

unit : mm

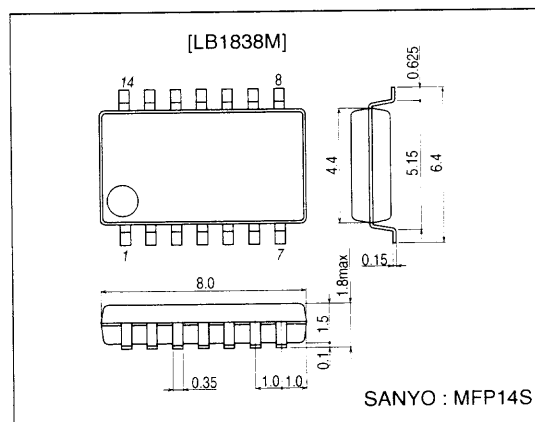3111-MFP14S**Specifications****Absolute Maximum Ratings at Ta = 25°C**






Parameter	Symbol	Conditions	Ratings	Unit
Maximum supply voltage	V _{CC} max		-0.3 to +10.5	V
	V _S max		-0.3 to +10.5	V
Output applied voltage	V _{OUT}		V _S +V _{SF}	V
Input applied voltage	V _{IN}		-0.3 to +10	V
Ground pin flow-out current	IGND	Per channel	1.0	A
Allowable power dissipation	Pd max1	Independent IC	550	mW
	Pd max2	* With board	800	mW
Operating temperature	Topr		-20 to +75	°C
Storage temperature	Tstg		-40 to +125	°C

*Note: Mounted on 20 x 30 x 1.5 mm³ glass epoxy PCB

SANYO Electric Co., Ltd. Semiconductor Company

TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN

Sample Application Circuit

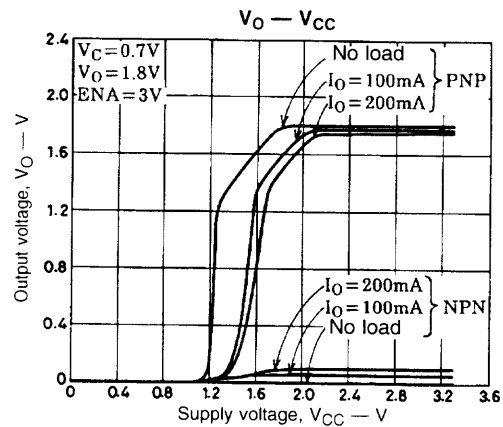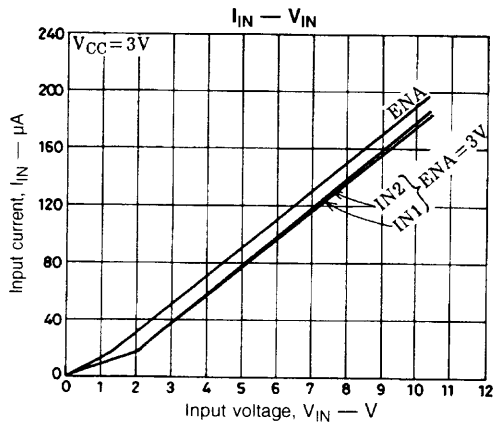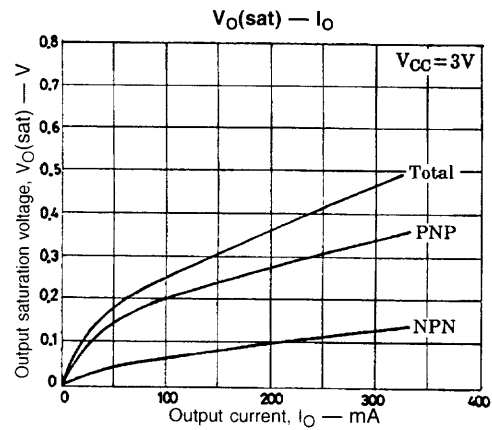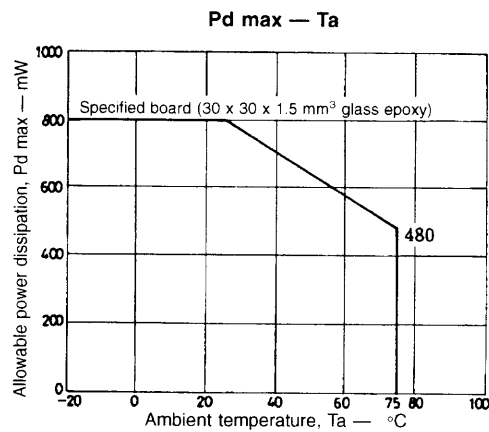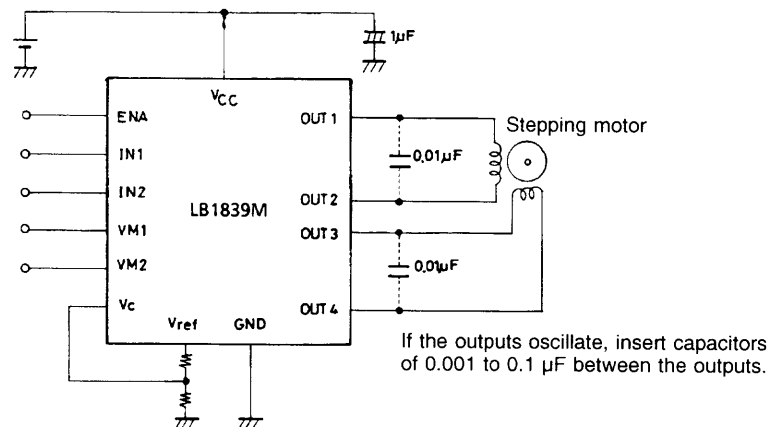


Allowable Operating Ranges at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Supply voltage	V_{CC}		2.5 to 9.0	V
	V_S		1.8 to 9.0	V
Input high-level voltage	V_{IH}		1.8 to 9.0	V
Input low-level voltage	V_{IL}		-0.3 to +0.7	V

Electrical Characteristics at $T_a = 25^\circ\text{C}$, $V_{CC} = 3\text{ V}$

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Supply current 1	I_{CC0}	ENA1, 2 = 0 V, $V_{IN\ 1} = 3\text{ V}$ or 0 V		0.1	10	μA
Supply current 2	I_{CC1}	ENA1 = 3 V, $V_{IN\ 1} = 3\text{ V}$ or 0 V		12	18	mA
Output saturation voltage	V_{OUT1}	ENA = 3 V, $V_{IN} = 3\text{ V}$ or 0 V, $I_{OUT} = 200\text{ mA}$		0.2	0.28	V
	V_{OUT2}	ENA = 3 V, $V_{IN} = 3\text{ V}$ or 0 V, $I_{OUT} = 400\text{ mA}$		0.4	0.6	V
Input current 1	I_{IN}	$V_{CC} = 6\text{ V}$, $V_{IN} = 6\text{ V}$			200	μA
Input current 2	I_{ENA}	$V_{CC} = 6\text{ V}$, ENA = 6 V			200	μA
Output sustaining voltage	$V_O(\text{sus})$	$I_{OUT} = 400\text{ mA}$	9			V
Spark killer diode reverse current	$I_S(\text{leak})$	V_{CC1} , $V_S = 7\text{ V}$			30	μA
Spark killer diode forward voltage	V_{SF}	$I_{OUT} = 400\text{ mA}$			1.7	V

Pin Assignment

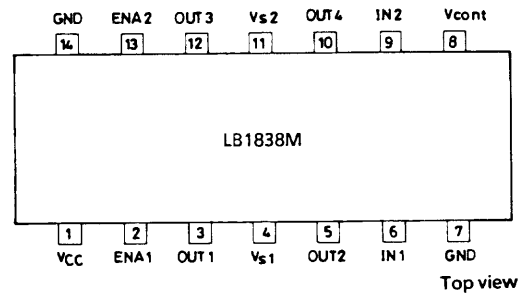


Note: Both GND pins should be connected to ground.

Truth Table


IN 1, 2	ENA 1, 2	OUT 1, 3	OUT 2, 4	Mode
L	H	H	L	Forward
H	H	L	H	Reverse
L	L	OFF	OFF	Standby
H	L	OFF	OFF	Standby

Block Diagram

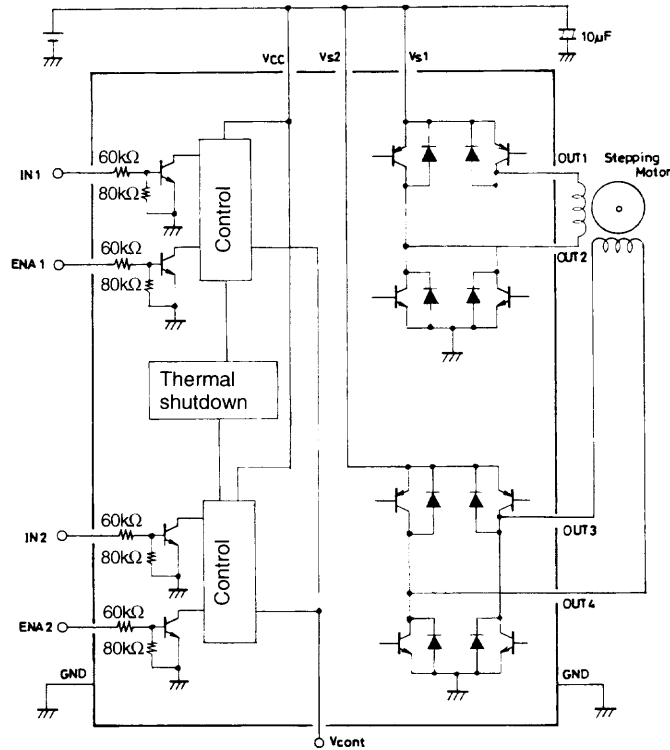

Note: As long as the voltages applied to V_{CC} , V_{S1} , V_{S2} , $ENA1$, $ENA2$, $IN1$, and $IN2$ are within the limits set by the absolute maximum ratings, there are no restrictions on the relationship of each voltage level in comparison with the others (regarding which is higher or lower). (ex. $V_{CC} = 3\text{ V}$, $V_{S1, 2} = 2\text{ V}$, $ENA = IN = 5\text{ V}$)

Vcont pin

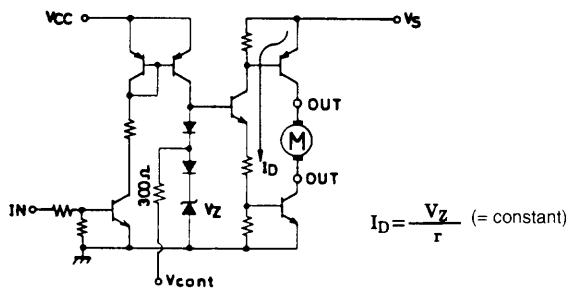

As shown in the above diagram, the Vcont pin outputs the voltage of the band gap Zener $V_Z + V_{BE}$ ($= 1.93\text{ V}$).

In normal use, this pin is left open.

The drive current I_D is varied by the Vcont voltage. However, because the band gap Zener is shared, it functions as a bridge.

