

SANYO**Dual Bidirectional Motor Driver****Overview**

The LB1650 is a dual bidirectional motor driver that is designed to accept standard TTL input logic levels and drive motors. It provides the functions of bidirectional motor drive, brake that are determined by two inputs and the inhibit function that brings the output to a high impedance state.

Applications


- Multi DC motor driver.
- Bidirectional motor driver.
- Bipolar stepping motor driver.

Features

- High output current (1A/ch).
- Wide operating voltage range (4.5 to 36V).
- Inhibit facility.
- Input connectable to TTL, CMOS IC.
- High noise margin.

Package Dimensions

unit:mm

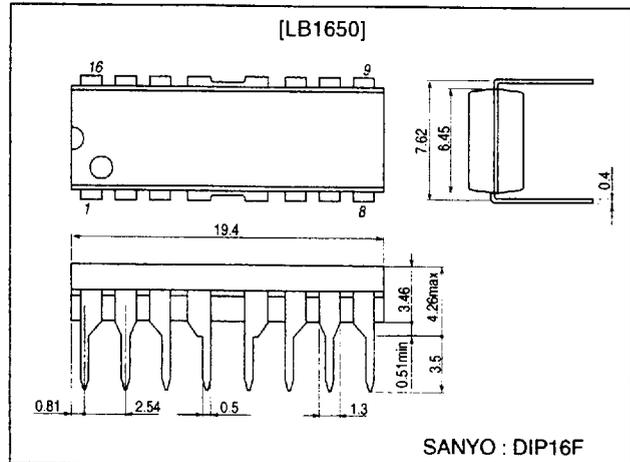3054A-DIP16F**Specifications****Absolute Maximum Ratings at Ta = 25°C**

Parameter	Symbol	Conditions	Ratings	Unit
Maximum supply voltage	V _{CC 1}		36	V
Logic supply voltage	V _{CC 2}		36	V
Input voltage	V _{IN}		7	V
Inhibit voltage	V _{inh}		7	V
Peak output current	I _{OUT}	1rms non-repetitive	2	A
Allowable power dissipation	P _{d max}	IC only	1.9	W
Operating temperature	T _{opr}		-20 to +80	°C
Storage temperature	T _{stg}		-40 to +150	°C

Allowable Operating Conditions at Ta = 25°C

Parameter	Symbol	Conditions	Ratings	Unit
Supply voltage	V _{CC 1}		4.5 to 36	V
Logic supply voltage	V _{CC 2}		4.5 to 36	V

■ Any and all SANYO products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your SANYO representative nearest you before using any SANYO products described or contained herein in such applications.

■ SANYO assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO products described or contained herein.

SANYO Electric Co., Ltd. Semiconductor Company

TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN

81099TH (KT)/82098HA (KT)/N3093TS/7067TA/D065MW/9074KI. TS No.1530-1/5

LB1650

Electrical Characteristics at $T_a = 25^\circ\text{C}$, $V_{CC1}=24\text{V}$, $V_{CC2}=5\text{V}$


Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Supply current (per CH)	I_{CC1}	$V_{IN}=L, I_O=0, V_{inh}=H$			1.5	mA
		$V_{IN}=H, I_O=0, V_{inh}=H$			6	mA
		$V_{inh}=L$			1	mA
Logic supply current	I_{CC2}	$V_{IN}=L, I_O=0, V_{inh}=H$		44	60	mA
		$V_{IN}=H, I_O=0, V_{inh}=H$			22	mA
		$V_{inh}=L$			24	mA
Low-level input voltage	V_{IL}		-0.3		+1.5	V
High-level input voltage	V_{IH}	$V_{CC2} \leq 7\text{V}$	2.3		V_{CC2}	V
		$V_{CC2} \leq 7\text{V}$	2.3		7	V
Low-level input current	I_{IL}	$V_{IN}=L$			± 10	μA
High-level input current	I_{IH}	$V_{IN}=H-0.3\text{V}$		30	100	μA
Low-level inhibit voltage	V_{inhL}		-0.3		+1.5	V
High-level inhibit voltage	V_{inhH}	$V_{CC2} \leq 7\text{V}$	2.3		V_{CC2}	V
		$V_{CC2} \leq 7\text{V}$	2.3		7	V
Low-level inhibit current	I_{inhL}		-100	-30		μA
High-level inhibit current	I_{inhH}				± 10	μA
Saturation voltage	$V_{CE(sat)H}$	$I_O=-1\text{A}$		1.4	1.8	V
	$V_{CE(sat)L}$	$I_O=1\text{A}$		1.2	1.8	V

Truth Table


V_{IN} (per CH)	V_{inh}	V_O
H	H	H
L	H	L
H	L	Open*
L	L	Open*

* : High impedance

Pin Assignment

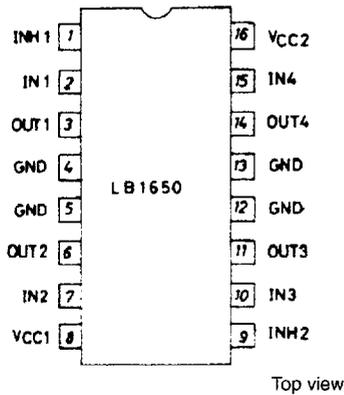


Equivalent Circuit Block Diagram and Peripheral Circuit

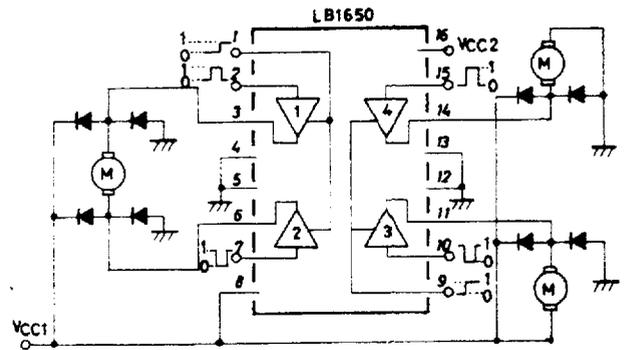

LB1650

Sample Application Circuits


(1) DC motor control

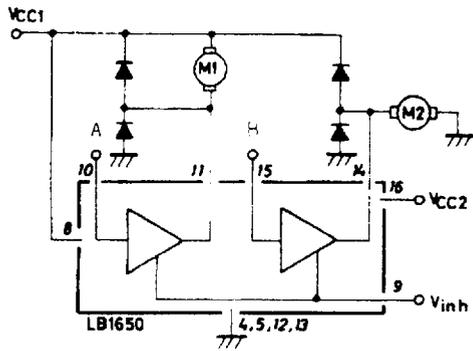

V _{inh}	A	M1	B	M2
H	H	Brake	H	Forward
H	L	Forward	L	Brake
L	X	Open*	X	Open*

X : don't care



(2) DC motor control (Forward, reverse)

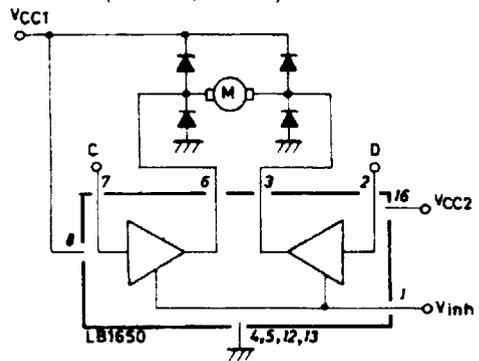

Input		Function
V _{inh}	C=H D=L	Forward (right)
	C=L D=H	Reverse (left)
	C=D	Brake
V _{inh} =L	C=X D=X	Open*

* : High impedance

(3) Stepping motor control (Bipolar drive)

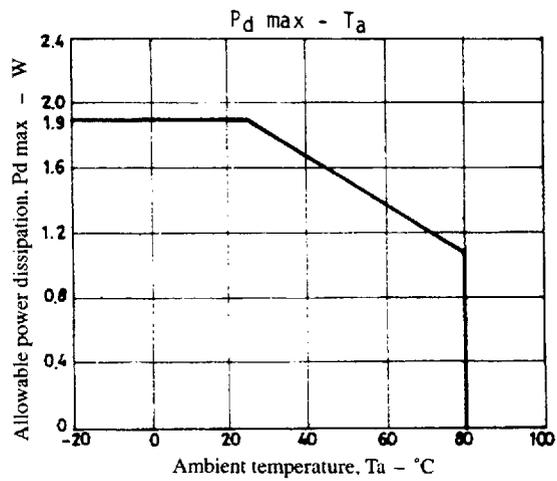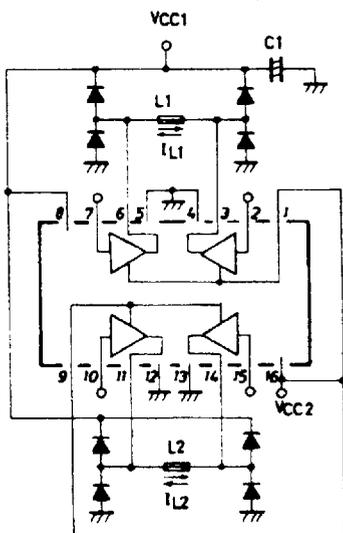

LB1650

