


**VERTICAL DEFLECTION CIRCUIT**

- RAMP GENERATOR
- INDEPENDENT AMPLITUDE ADJUSTEMENT
- BUFFER STAGE
- POWER AMPLIFIER
- FLYBACK GENERATOR
- INTERNAL REFERENCE VOLTAGE
- THERMAL PROTECTION

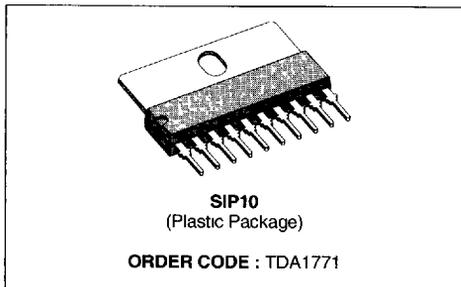


**DESCRIPTION**


The TDA1771 is a monolithic integrated circuit in SIP10 package.

It is a full performance and very efficient vertical deflection circuit intended for direct drive of a TV picture tube in Color and B & W television as well as in Monitor and Data displays.

**PIN CONNECTIONS (top view)**

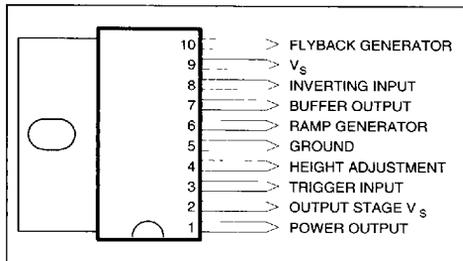

**BLOCK DIAGRAM**

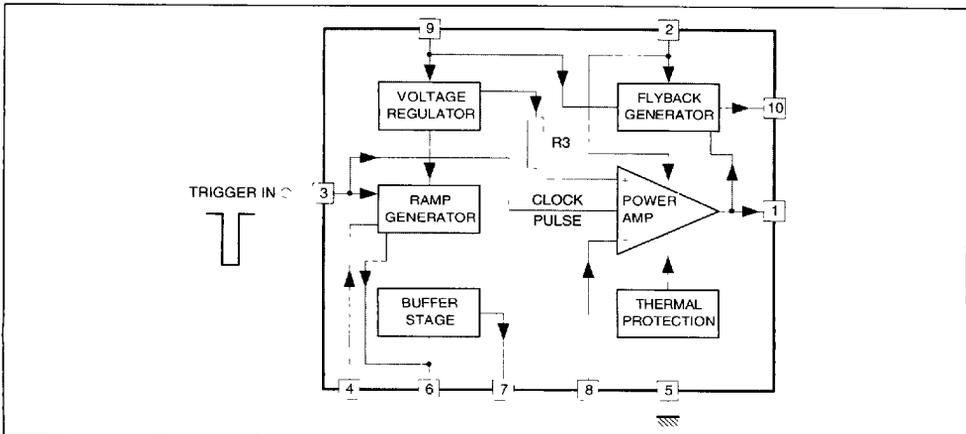

## ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
$V_S$	Supply Voltage	30	V
$V_1, V_2$	Flyback Peak Voltage	65	V
$V_3$	Trigger Input Voltage	20	V
$V_8$	Amplifier Input Voltage	GND to $V_S$	V
$I_0$	Output Peak to Peak Current (non repetitive $t = 2\text{ms}$ )	6	A
$I_0$	Output Peak to Peak Current $t > 10\mu\text{s}$	4	A
$I_{10}$	Pin 10 DC Current at $V_1 < V_9$	100	mA
$I_{10}$	Pin 10 Peak to Peak Current @ $t_{\text{fly}} < 1.5\text{ms}$	3	A
$P_{\text{tot}}$	Total Power Dissipation @ $T_{\text{tab}} = 60^\circ\text{C}$	9	W
$T_S, T_J$	Storage and Junction Temperature	-40, +150	$^\circ\text{C}$

1771-01 TBL

## THERMAL DATA

Symbol	Parameter	Value	Unit
$R_{\text{th (j-tab)}}$	Thermal Resistance Junction-tab	Max. 10	$^\circ\text{C/W}$
$R_{\text{th (j-a)}}$	Thermal Resistance Junction-ambient	Max. 70	$^\circ\text{C/W}$

1771-02 TBL

ELECTRICAL CHARACTERISTICS ( $T_{\text{amb}} = 25^\circ\text{C}$  unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
DC ( $V_S = 30\text{V}$ )						
$I_2$	Pin 2 Quiescent Current	$I_1 = 0, I_{10} = 0$		16	36	mA
$I_9$	Pin 9 Quiescent Current	$I_1 = 0, I_{10} = 0$		15	30	mA
$-I_6$	Ramp Generator Bias Current	$V_6 = 0$			0.5	$\mu\text{A}$
$-I_6$	Ramp Generator Current	$V_6 = 0, -I_4 = 20\mu\text{A}$	18.5	20	21.5	$\mu\text{A}$
$dI_6/I_6$	Ramp Gener. Linearity	$V_6 = 0$ to $15\text{V}, -I_4 = 20\mu\text{A}$		0.2	1	%
$V_1$	Quiescent Output Voltage	$R_a = 30\text{k}\Omega, R_b = 10\text{k}\Omega, V_S = 30\text{V}$	17.0	17.8	18.6	V
		$R_a = 6.8\text{k}\Omega, R_b = 10\text{k}\Omega, V_S = 15\text{V}$	7.2	7.5	7.8	V
$V_{1L}$	Out Saturation Voltage to GND	$I_1 = 0.5\text{A}$		0.5	1	V
		$I_1 = 1.2\text{A}$		1	1.4	V
$V_{1H}$	Out Saturation Voltage to $V_S$	$-I_1 = 0.5\text{A}$		1.1	1.6	V
		$-I_1 = 1.2\text{A}$		1.6	2.2	V
$V_4$	Reference Voltage	$-I_4 = 20\mu\text{A}$	6.3	6.6	6.9	V
$dV_4/V_S$	Reference Voltage Drift Versus $V_S$	$V_S = 10\text{V}$ to $30\text{V}$		1	2	mV/V
$dV_4/dI_4$	Reference Voltage Drift Versus $I_4$	$I_4 = 10\mu\text{A}$ to $30\mu\text{A}$		1.5	2	mV/ $\mu\text{A}$
$V_r$	Internal Ref. Voltage		4.26	4.40	4.54	V
$G_v$	Output Stage Open Loop Gain	$f = 100\text{Hz}$		60		dB
$V_{f5}$	$V_9 - I_0$ Saturation Voltage	$-I_{10} = 1.2\text{A}$		1.5	2.5	V
$V_{10}$	Pin 10 Scanning Voltage	$I_{10} = 20\text{mA}$		1.7	3	V
$V_3$	Trigger Input Threshold	(see note 1)	2.6	3.0	3.4	V
$I_3$	Trigger Input Bias Current	$V_{IN} = V_3 - 0.2\text{V}$			30	$\mu\text{A}$
$t_3$	Trigger Input Width	(see note 2)	20	60	th	$\mu\text{S}$

1771-03 TBL

- Notes: 1. The trigger input circuit can accept, with a metal option, positive and negative going input pulses.  
 2.  $t_3 = 1.2 \frac{t_s}{V_{PP}}$  where  $t_s$  is the vertical period and  $V_{PP}$  is ramp amplitude at Pin 6

