# TABLE 1: ELECTRICAL SPECIFICATIONS AT 25 °C

SWITCHING TRANSFORMER DESIGNED FOR USE WITH POWER INTEGRATIONS TOP223Y, REFER TO APPLICATION CIRCUIT OF FIGURE 3.

PARAMETER SPEC LIMITS MIN. TYP. MAX.		MAX.	UNITS	
PRIMARY INDUCTANCE (2-1) VOLTAGE = 0.250Vrms FREQUENCY = 100 KHZ	630	700	770	μНΥ
TURN RATIO'S: SEC #1 (8-7): PRIMARY (2-1) SEC #2 (6-5): PRIMARY (2-1) BIAS (3-4): PRIMARY (2-1)		1: 6.625 1:13.250 1: 8.834		± 3% ± 3% ± 3%
PRI LEAKAGE IND. (SEC'S SHORT) 0.250Vrms @ 100KHz			22	μНΥ
HIPOT: PRIMARY & BIAS TO SECONDARY'S SECONDARY #1 TO SECONDARY #2	3000 500			Vrms Vrms
APP CIRCUIT PARAMETERS: (1) AC LINE VOLTAGE 47/400 Hz SEC #1 OUTPUT VOLTAGE SEC #1 OUTPUT MA CONTINUOUS SEC #1 LOAD REGULATION 10-100% SEC #2 OUTPUT VOLTAGE (2) SEC #2 OUTPUT MA CONTINUOUS SEC #2 LOAD REGULATION 10-100% LINE REGULATION (85 TO 265 Vac) RIPPLE EACH OUTPUT	85 20  200 	15.0  8.0 <sup>(3)</sup> 7.5  0.50 0.20 50.0	265 260  1100 	Vac Vdc mA ±% Vdc mA ±% ±% ±mV
TRANSFORMER TEMPERATURE RISE		20.0		°C

### **FIGURE 1: SCHEMATIC DIAGRAM**

WHITE DOT ON

BOBBIN DENOTES PIN #1

(HOT RAIL) 1 0 8 (+15V)

PRIMARY

SEC #1

7 (15V RETURN)

(HOT RETURN) 4 0 5 (7.5V RETURN)


#### NOTE 1

REINFORCED INSULATION SYSTEM, UL1950, IEC950, CSA-950:

- A) ALL MATERIALS MEET "UL", "CSA" & "IEC" REQUIREMENTS
- B) TRIPLE BASIC INSULATED SECONDARY. C) DESIGNED TO MEET ≥6.2mm CREEPAGE REQUIREMENTS.
- D) VARNISH FINISHED ASSEMBLY.
- E) UL1950 & CSA-950 CERTIFIED: FILE #E162344.
- F) UL CLASS (B) 130 INSULATION SYSTEM PM130-R1, PM130-H1, PM130-H1A (UL FILE #E177139) OR ANY UL AUTHORIZED CLASS (B) INSULATION SYSTEM.

### NOTE 2

- (1) REFER TO APPLICATION CIRCUIT OF FIGURE 3.
- (2) SEC #2 IS REGULATED OUTPUT.
- (3) SEC #1 IS UNREGULATED OUTPUT

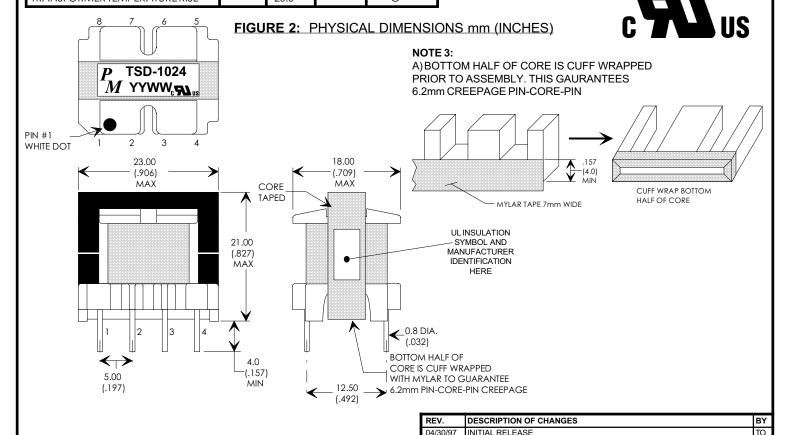

06/25/97

04/19/99

EI22/19/6, 8-PIN VERTICAL BOBBIN

P	Premier
M	Magnetics Inc.
"INNOVA	TORS IN MAGNETICS TECHNOLOGY"

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM DIMENSIONAL TOLERANCES ARE: DECIMALS ANGLES

.X  $\pm$  .25  $\pm$  0  $^{\circ}$  30' .XX  $\pm$  .15 DO NOT SCALE DRAWING

FLYBACK TRANSFORMER (	CONTROL DRAWING
PREMIER P/N: TSD-1024	REVISION: 04/19/99

UPDATED TABLE 1, NO OTHER CHANGES
UPDATED TO UL CLASS (B) INSULATION SYSTEM

TO

MD

DRAWN BY: TOM O'NEIL REF: TOP223Y

SCALE: NONE SHEET: 1 OF 6


# **APPLICATION NOTES**

Premier Magnetic's TSD-1024 Switch Mode Transformer was designed for use with Power Integrations, Inc. TOP223Y three terminal off-line PWM switching regulator in the Flyback Buck-Boost circuit configuration. This conversion topology can provide isolated multiple outputs with efficiencies up to 90%. Premier's TSD-1024 transformer has been optimized to provide maximum power throughput.

The PWR-TOPXXX series from Power Integrations, Inc. are self contained 100KHz three terminal voltage controlled PWM switching regulators. This series contains all necessary functions for an off-line switched mode control DC power source. These switching regulators provide a very simple solution to off-line designs. The inductors and transformer used with the PWR-TOPXXX are critical to the performance of the circuit. They define the overall efficiency, output power and overall physical size.

Below is a universal input Dual Output 14 watt application circuit utilizing Power Integrations TOP223 switching regulator in the flyback buck-boost configuration. The component values listed are intended for reference purposes only. Clamp Resistor R6 is necessary to prevent possible destructive voltage runaway if the 15V output can ever be run under a no load condition.

### FIGURE 3: TYPICAL APPLICATION CIRCUIT

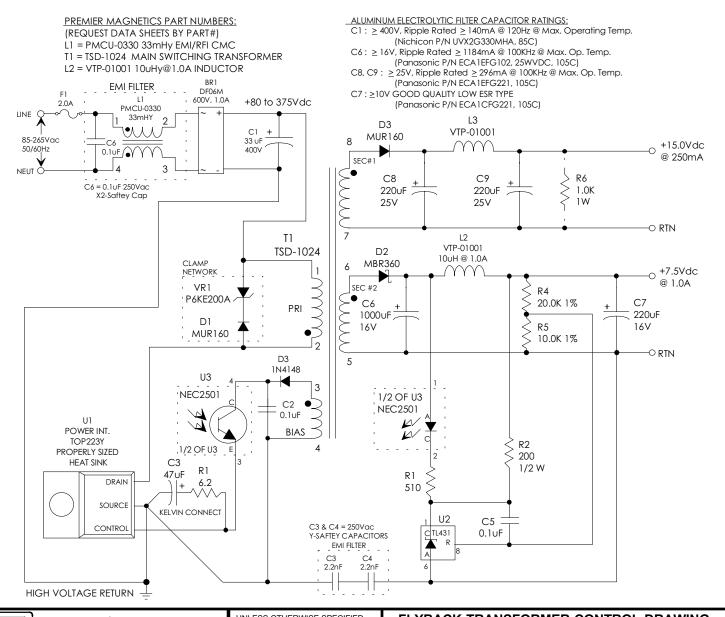



UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM DIMENSIONAL TOLERANCES ARE: DECIMALS ANGLES .X ± .25 ±0 ° 30' .XX ± .15

DO NOT SCALE DRAWING

FLYBACK TRANSFORMER CONTROL DRAWING				
PREMIER P/N: TSD-1024	REVISION: 04/19/99			
DRAWN BY: TOM O'NEIL	REF: TOP223Y			
SCALE: NONE	SHEET: 2 OF 6			