

# AN3811NK

## Cylinder Hall motor driving IC for VCR

### Overview


The AN3811NK is an IC designed for driving the VCR cylinder Hall motor.

### Features


- Operating supply voltage range:  
 $V_{CC} = 4.5 \text{ V to } 5.5 \text{ V}$
- Motor voltage:  $V_M = 5 \text{ V to } 20 \text{ V}$
- Maximum output current:  $I_{omax} = 1.5 \text{ A}$
- Three-phase, half-wave and overlap driving lowers a magnetic sound noise.
- PG/FG generating circuit built in
- Thermal protection circuit built in

### Applications

- VCR

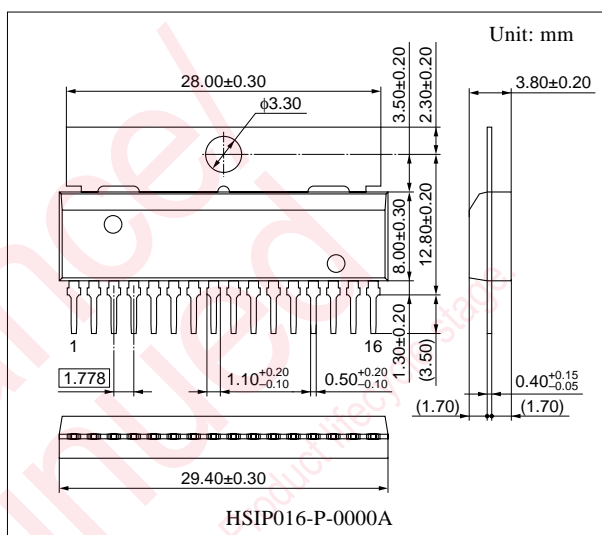

### Block Diagram

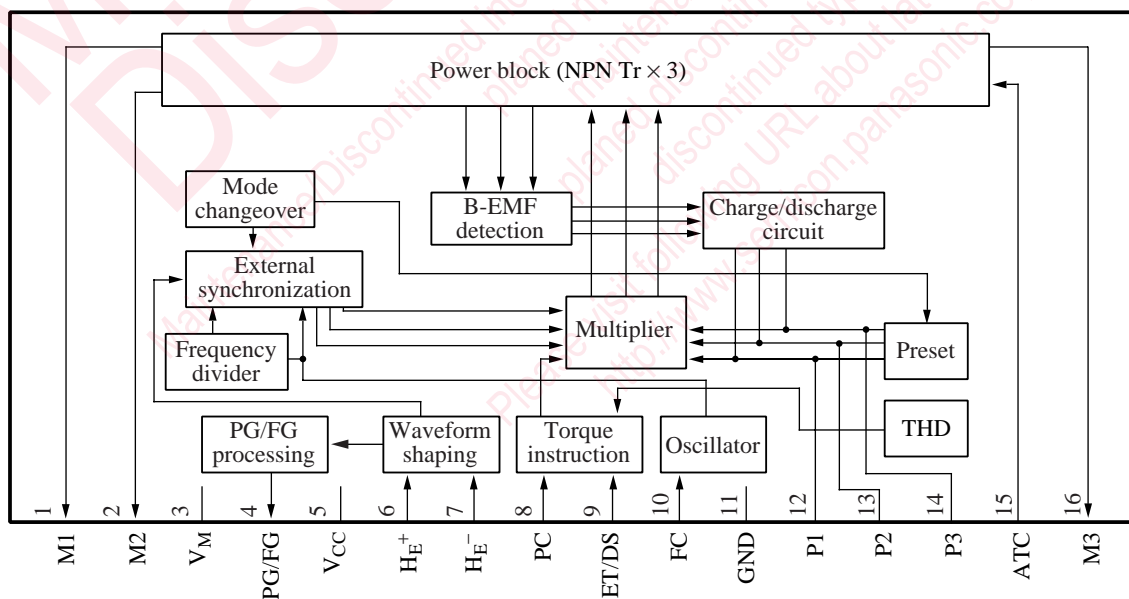

## ■ Pin Descriptions

Pin No.	Description	Pin No.	Description
1	Driving output 1	9	Torque command input
2	Driving output 2	10	Oscillation output pin
3	Motor power supply pin	11	Grounding pin
4	PG/FG output	12	Position signal pin 1
5	Power supply pin	13	Position signal pin 2
6	Hall element normal phase input	14	Position signal pin 3
7	Hall element reverse phase input	15	Total current output
8	Phase compensation pin	16	Driving output 3

## ■ Absolute Maximum Ratings

Parameter	Symbol	Rating	Unit
Supply voltage	$V_{CC}$	6.0	V
Supply current	$I_{CC}$	—	mA
Power dissipation <sup>*2</sup>	$P_D$	1 150	mW
Operating ambient temperature <sup>*1</sup>	$T_{opr}$	−20 to +75	°C
Storage temperature <sup>*1</sup>	$T_{stg}$	−55 to +150	°C
Circuit voltage <sup>*3</sup>	$V_{n-11}$	40	V
Circuit voltage	$V_{3-11}$	20	V
Circuit current <sup>*3</sup>	$I_n$	1.5	A

Note) 1. <sup>\*1</sup>: Except for the power dissipation, operating ambient temperature and storage temperature, all ratings are for  $T_a = 25^\circ\text{C}$ .

<sup>\*2</sup>: Use this IC within the value of the  $P_D$  at  $T_a = 75^\circ\text{C}$ .

<sup>\*3</sup>:  $n = 1, 2, 16$

2. Do not apply external currents or voltages to any pins not specifically mentioned.

3. For circuit currents, '+' denotes currents flowing into the IC, and '-' denotes current flowing out of the IC.

## ■ Recommended Operating Range

Parameter	Symbol	Range	Unit
Supply voltage	$V_{CC}$	4.5 to 5.5	V
	$V_M$	13.5 to 15.5	

# ■ Electrical Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Circuit current	$I_{CC}$		5	—	13	mA
Output saturation voltage	$V_{O(SAT)}$	$I_a = 0.6\text{ A}$	—	—	0.8	V
ATC residual voltage	$V_{IDLE}$		—	—	4	mA
ATC limiting voltage	$V_{LIMIT}$	External synchronization	0.31	—	0.44	V
Input/output transfer gain	$A_V$		0.75	—	1.25	times
Torque command input offset voltage	$E_{T\text{OFFSET}}$		−50	—	30	mV
ET input current	$I_{ET}$	$ET/DS = 2.5\text{ V}$	−1.0	—	—	$\mu\text{A}$
BFG takeout voltage	$V_{BFG}$		—	—	0.5	V
Hall element input sensitivity	$\Delta V_{HE}$		5	—	22	mV
PG/FG tri-state output voltage 1	$V_{O(H)}$	$I_O = -30\text{ }\mu\text{A}$	3.5	—	—	V
PG/FG tri-state output voltage 2	$V_{O(M)}$	$I_O = \pm 10\text{ }\mu\text{A}$	2.1	—	2.9	V
PG/FG tri-state output voltage 3	$V_{O(L)}$	$I_O = 30\text{ }\mu\text{A}$	—	—	0.9	V
Flyback voltage V-I conversion gain	$G_M$		13	—	27	$\mu\text{S}$
Position signal input dynamic range	$\Delta V_P$		0.8	—	—	V
Position signal input offset voltage	$V_{P\text{OFFSET}}$		−100	—	100	mV
Saturation det. start voltage	$V_{(DET)}$		1.3	—	2.0	V


## • Design reference data

Note) The characteristics listed below are theoretical values based on the IC design and are not guaranteed.

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
ATC limiting voltage temperature coefficient	$\alpha V_{LIMIT}$		—	−900	—	ppm/ $^\circ\text{C}$
FC oscillation frequency	$f_C$	$C = 0.1\text{ }\mu\text{F}$	122	147	184	Hz
FC oscillation frequency coefficient	$\alpha f_C$	Not considering capacitance variation related to temperature	—	−900	—	ppm/ $^\circ\text{C}$

Note)  $V_{CC} = 5\text{ V}$ ,  $V_M = 14\text{ V}$  unless otherwise specified.

# ■ Application Circuit Example

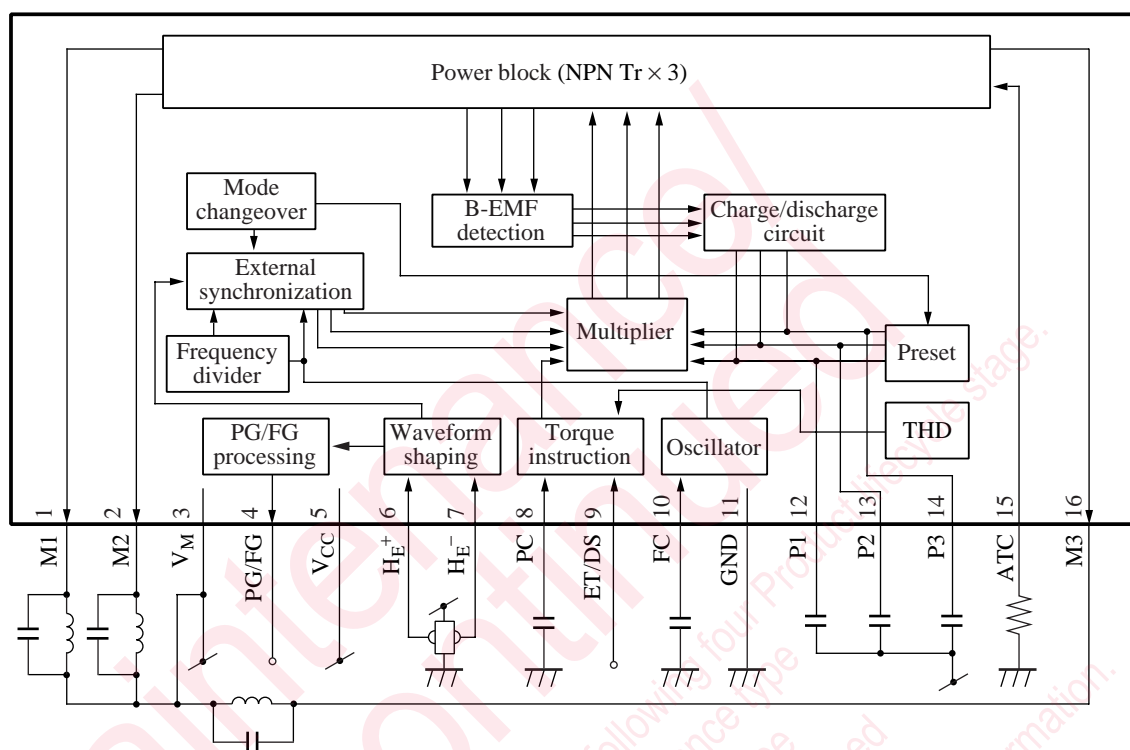

## Request for your special attention and precautions in using the technical information and semiconductors described in this book

- (1) If any of the products or technical information described in this book is to be exported or provided to non-residents, the laws and regulations of the exporting country, especially, those with regard to security export control, must be observed.
- (2) The technical information described in this book is intended only to show the main characteristics and application circuit examples of the products, and no license is granted under any intellectual property right or other right owned by our company or any other company. Therefore, no responsibility is assumed by our company as to the infringement upon any such right owned by any other company which may arise as a result of the use of technical information described in this book.
- (3) The products described in this book are intended to be used for standard applications or general electronic equipment (such as office equipment, communications equipment, measuring instruments and household appliances).  
Consult our sales staff in advance for information on the following applications:
  - Special applications (such as for airplanes, aerospace, automobiles, traffic control equipment, combustion equipment, life support systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.
  - Any applications other than the standard applications intended.
- (4) The products and product specifications described in this book are subject to change without notice for modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (5) When designing your equipment, comply with the range of absolute maximum rating and the guaranteed operating conditions (operating power supply voltage and operating environment etc.). Especially, please be careful not to exceed the range of absolute maximum rating on the transient state, such as power-on, power-off and mode-switching. Otherwise, we will not be liable for any defect which may arise later in your equipment.
  - ☐ Even when the products are used within the guaranteed values, take into the consideration of incidence of break down and failure mode, possible to occur to semiconductor products. Measures on the systems such as redundant design, arresting the spread of fire or preventing glitch are recommended in order to prevent physical injury, fire, social damages, for example, by using the products.
- (6) Comply with the instructions for use in order to prevent breakdown and characteristics change due to external factors (ESD, EOS, thermal stress and mechanical stress) at the time of handling, mounting or at customer's process. When using products for which damp-proof packing is required, satisfy the conditions, such as shelf life and the elapsed time since first opening the packages.
- (7) This book may be not reprinted or reproduced whether wholly or partially, without the prior written permission of Matsushita Electric Industrial Co., Ltd.