




20-020 LOCKING CABLE TIES



RU

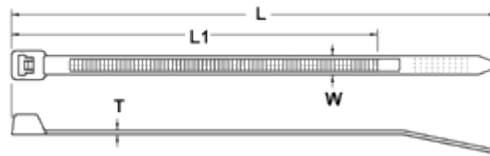

Material : Nylon PA 66 (UL 94V-2).

Temperature : -20 oC ~ 75 oC.

These versatile fasteners can be used in countless applications wherever you need to bundle wires, cables or pipes.

The tie bundle diameters up to 235 mm (can be joined together with 2, 3 or even more ties for larger diameters) and have minimum loop tensile strengths from 18 Lbs. to 250 Lbs.

Other colours available upon request.

Black-for greater resistance to ultraviolet light in outdoor applications.

Unit: mm

Cat. No.		Lenght		Width	Thickness	Bundle Diameter	Tensile Strength LBS.	Std. Pkg.
Natural	Black	L	L1	W	T	E		pcs
ALT - 085S	ALT - 085S - B	87	64	2.5	1.1	2~18	18	1000
ALT - 102S	ALT - 102S - B	104	79	2.5	1.1	2~23	18	1000
ALT - 120S	ALT - 120S - B	122	97	2.5	1.1	2~30	18	1000
ALT - 165S	ALT - 165S - B	167	143	2.5	1.1	2~40	18	1000
ALT - 200S	ALT - 200S - B	206	182	2.5	1.3	2~50	18	1000
ALT - 150M	ALT - 150M - B	150	123	3.5	1.3	3~33	30	1000
ALT - 200M	ALT - 200M - B	203	175	3.6	1.3	3~50	30	1000
ALT - 250M	ALT - 250M - B	253	223	3.6	1.4	3~65	40	1000
ALT - 300M	ALT - 300M - B	303	275	3.6	1.5	3~82	40	1000
ALT - 130L	ALT - 130L - B	132	104	4.8	1.3	4~32	50	1000
ALT - 180L	ALT - 180L - B	182	153	4.8	1.4	4~42	50	1000
ALT - 200L	ALT - 200L - B	205	172	4.8	1.4	4~48	50	1000
ALT - 250L	ALT - 250L - B	255	223	5	1.5	4~65	50	1000
ALT - 300L	ALT - 300L - B	302	273	5	1.6	4~82	50	1000
ALT - 370L	ALT - 370L - B	373	345	5	1.5	4~102	50	100
ALT - 390L	ALT - 390L - B	396	364	5	1.6	4~105	50	100
ALT - 430L	ALT - 430L - B	435	405	5	1.7	4~120	50	100
ALT - 280H	ALT - 280H - B	283	257	7.9	1.6	8~76	120	100
ALT - 340H	ALT - 340H - B	343	318	7.9	1.8	8~90	120	100
ALT - 380H	ALT - 380H - B	389	360	8	2	8~100	120	100
ALT - 530H	ALT - 530H - B	538	504	8	1.7	20~155	120	100
ALT - 550H	ALT - 550H - B	556	522	12.7	2	20~160	250	100
ALT - 685H	ALT - 685H - B	691	642	8	2	8~195	120	100
ALT - 812H	ALT - 812H - B	820	783	9	2	12~235	175	100

