

Document	Datasheet
Type	Main Internal Antenna
Application	GSM850/900, DCS, PCS, WCDMA
Part No.	AMMAP003
Revision	0


DATASHEET

Application

Automotive
PDAs
Personal Tracker
PCMCA Cards

Features

High efficiency,
Pb-free Condition
RoHS Compliant

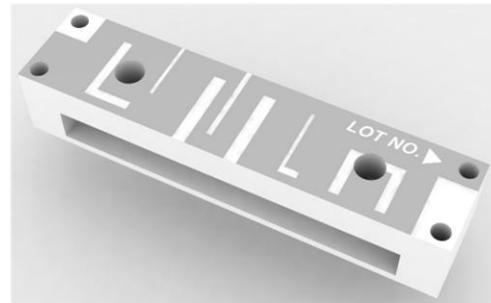

AMOTECH

Notes

The contents of this datasheet are subject to change without notice. Please confirm the specifications and delivery conditions when placing your order.

Revision History

Rev. No	Date	Title	Contents	Page
0	2010.07.23		First, documented	-

Table of Contents

1. Specifications	3
1.1 Electrical Specifications	3
1.2 Mechanical Specifications	3
1.3 Appearance and Dimensions	3
1.4 Marking	3
2. Measurement	4
2.1 SET for Measurement	4
2.2 Electrical Characteristic	4
2.3 Radiation Characteristic	5
3. SOLDERING RECOMMENDATIONS	6
3.1. Soldering Land Pattern	6
3.2. Free Space Size	6
3.3. Soldering Profile	7
4. ATTACHMENT	8-9
5. PACKING	10
5.1 Tape Dimension	10
5.2 Description of Reel	11
5.3 Description of Packing Box	11-12

1. SPECIFICATIONS

1.1. Electrical Specifications

ITEM	GSM850	GSM900	DCS	PCS	UMTS	Remark
Frequency [MHz]	824~894	880~960	1710~1880	1850~1990	1920~2170	Notes :1)
Peak Gain [dBi]	1.3	2.4	6.4	5.9	4.8	Notes :1)
Eff.[%] @Min	42.4%	57.3%	80.7%	84.0%	82.1%	Notes :1)
VSWR	3.0 : 1 max					Notes :1)
	3.5:1 Max @725~855MHz		3.0:1 Max @1510~2070MHz			Notes :2)
Polarization	Linear					Notes :1)
Azimuth Beam Pattern	Omni-directional					Notes :1)
Impedance	50 Ω					Notes :1)



※Notes:1) Measured on the matched EV test board.

Notes:2) Measured on the matched AMOTECH manual jig.

1.2. Mechanical Specifications


Electrode	Silver	-
Dimensions (L x W x H)	24.0 x 5.5 x 4.4	mm
Operating Temperature	-35 ~ +85	°C

1.3. Appearance and Dimensions

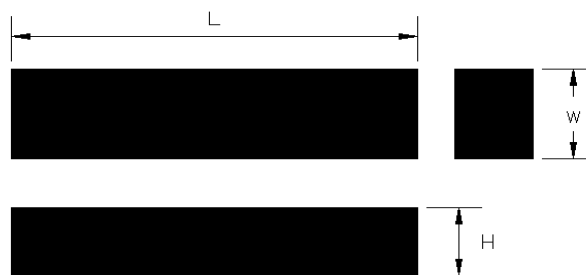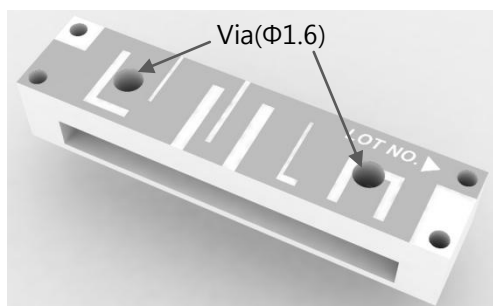

Unit : mm
Tolerance : ±0.15


1.4 Marking




- P003** : Model No.
- YY** : Year (ex: 2010 → 10)
- WW** : Week (ex: 1st week→01, 7th week→07)
- ▶** : Feeding point

2. MEASUREMENT

2.1. SET for Measurement

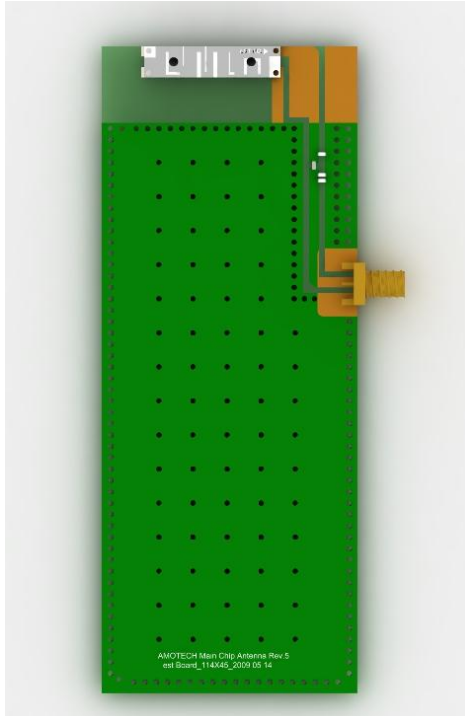

Board size: 114x45mm

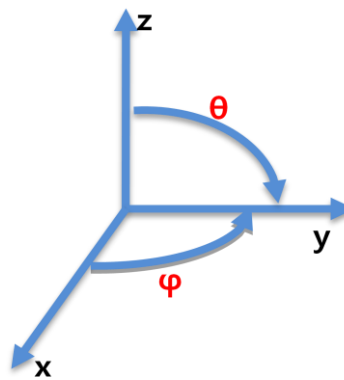


Antenna Radiation coordinate system


2.2. Electrical Characteristic

◆ S_{11} (VSWR)

Penta Band (GSM850&900, DCS, PCS, UMTS)

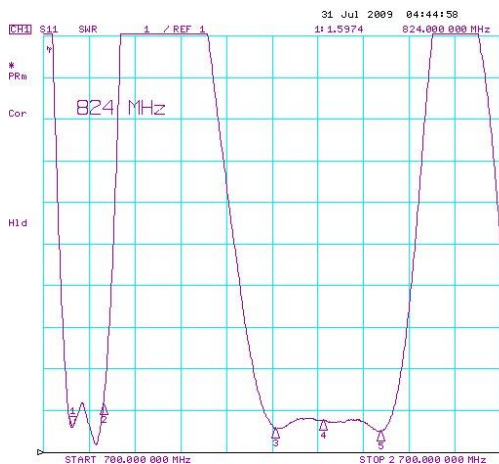

- VSWR @ EV Board -

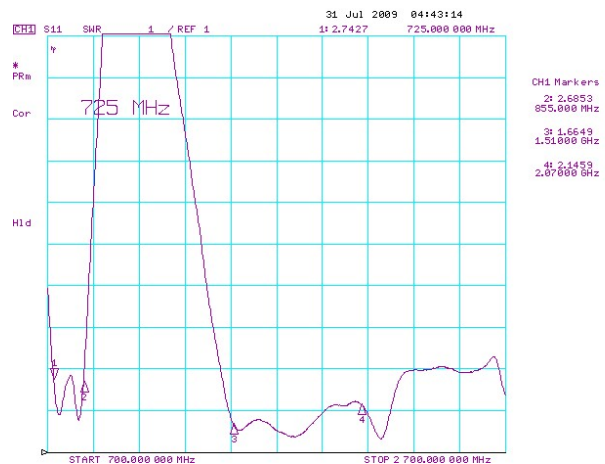

- VSWR @ Manual Jig -

2.3. Radiation Characteristic

- Measurement Setup


- 6mx3mx3m Anechoic Chamber
- Matching on the standard test board (114 x 45mm)
- Temp. : 25℃ / Humidity : 50~55%

- Measurement Result


Band	Frequency MHz]	Ave. gain (dBi)	Peak. Gain (dBi)	Eff.(%)
GSM850	824	-3.7	-0.3	42.4
	849	-3.6	-0.2	43.8
	869	-3.3	0.4	47.1
	894	-2.5	1.3	56.1
GSM900	880	-2.4	1.5	57.3
	915	-1.9	2.2	64.6
	925	-1.8	2.4	65.8
	960	-2.3	1.8	58.2
DCS	1710	-0.4	6.4	90.9
	1785	-0.9	5.8	80.7
	1805	-0.6	6.1	86.2
	1880	-1.1	5.4	76.8
PCS	1850	-0.8	5.6	84.0
	1910	-0.5	5.9	89.8
	1930	-0.5	5.8	88.6
	1990	-0.6	5.5	86.7
UMTS	1920	-0.7	4.8	84.9
	1980	-0.9	4.5	82.1
	2110	-0.5	4.6	89.5
	2170	-0.2	4.5	95.4

3. SOLDERING RECOMMENDATIONS

3.1. Soldering Land Pattern

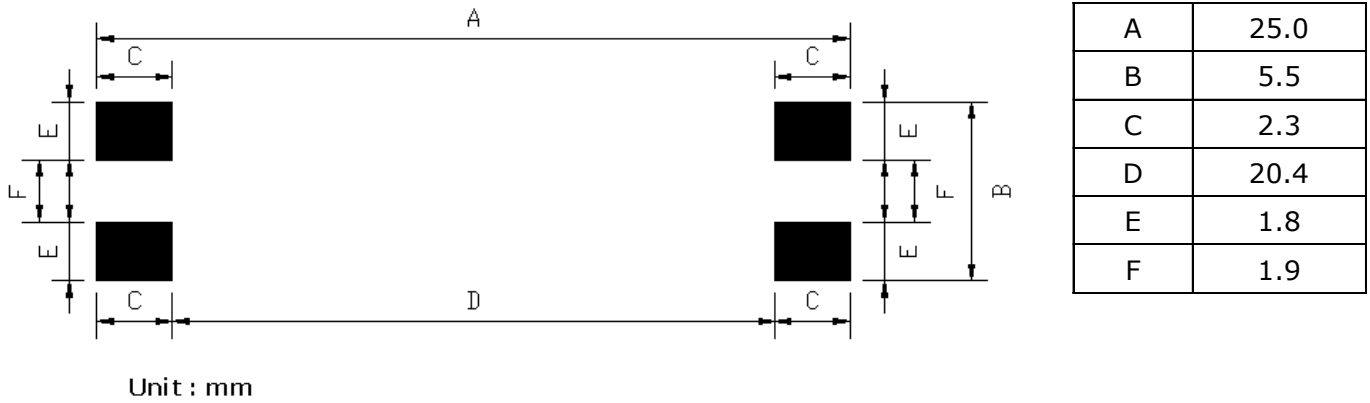


3.2. Free Space Size

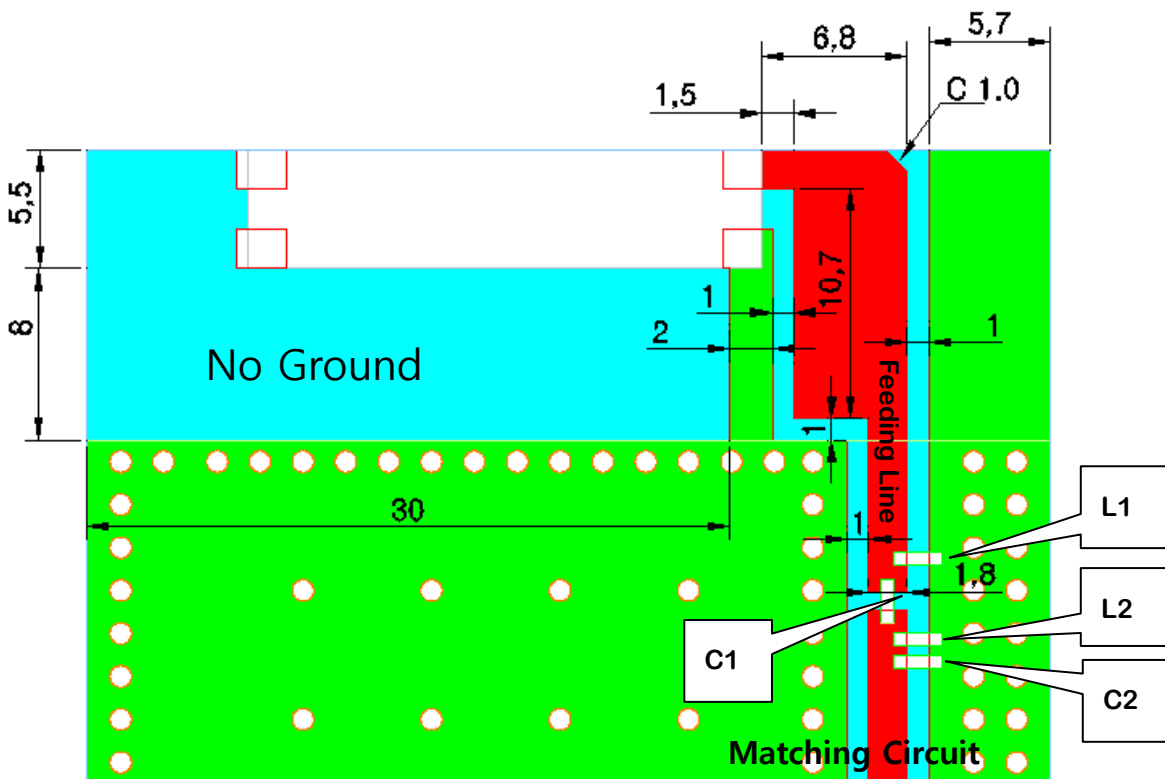

C1 (Series)	3.6pF
C2 (Shunt)	1.8pF
L1 (Shunt)	3.9nH
L2 (Shunt)	2.7nH

3.3. Soldering Profile


Solder paste : Sn/Ag/Cu:96.5/3.0/0.5

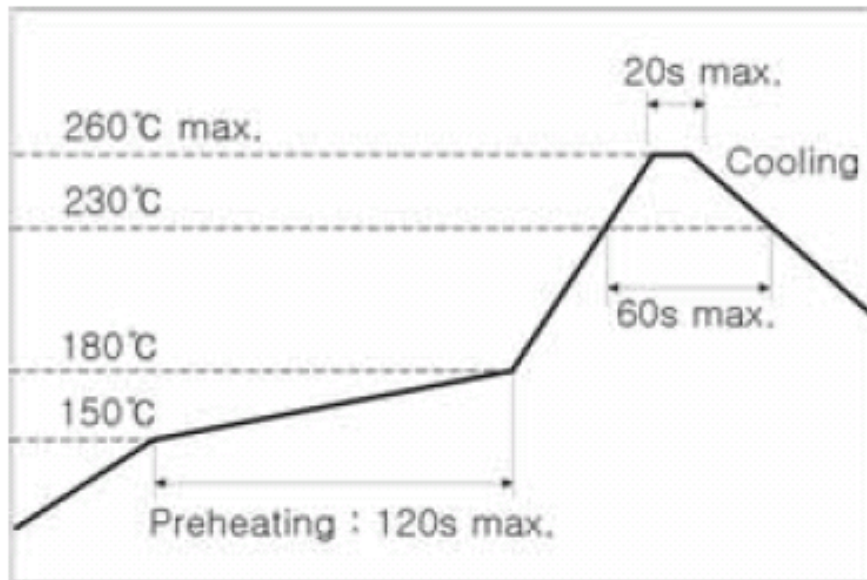


This product is designed for reflow soldering only. Do not use flow (wave) soldering.

- ① Use non-activated flux (Cl content 0.2% max.)
- ② Follow the recommended soldering conditions to avoid damage.
- ③ Reflow-cycle is max. 3 times.

4. ATTACHMENT

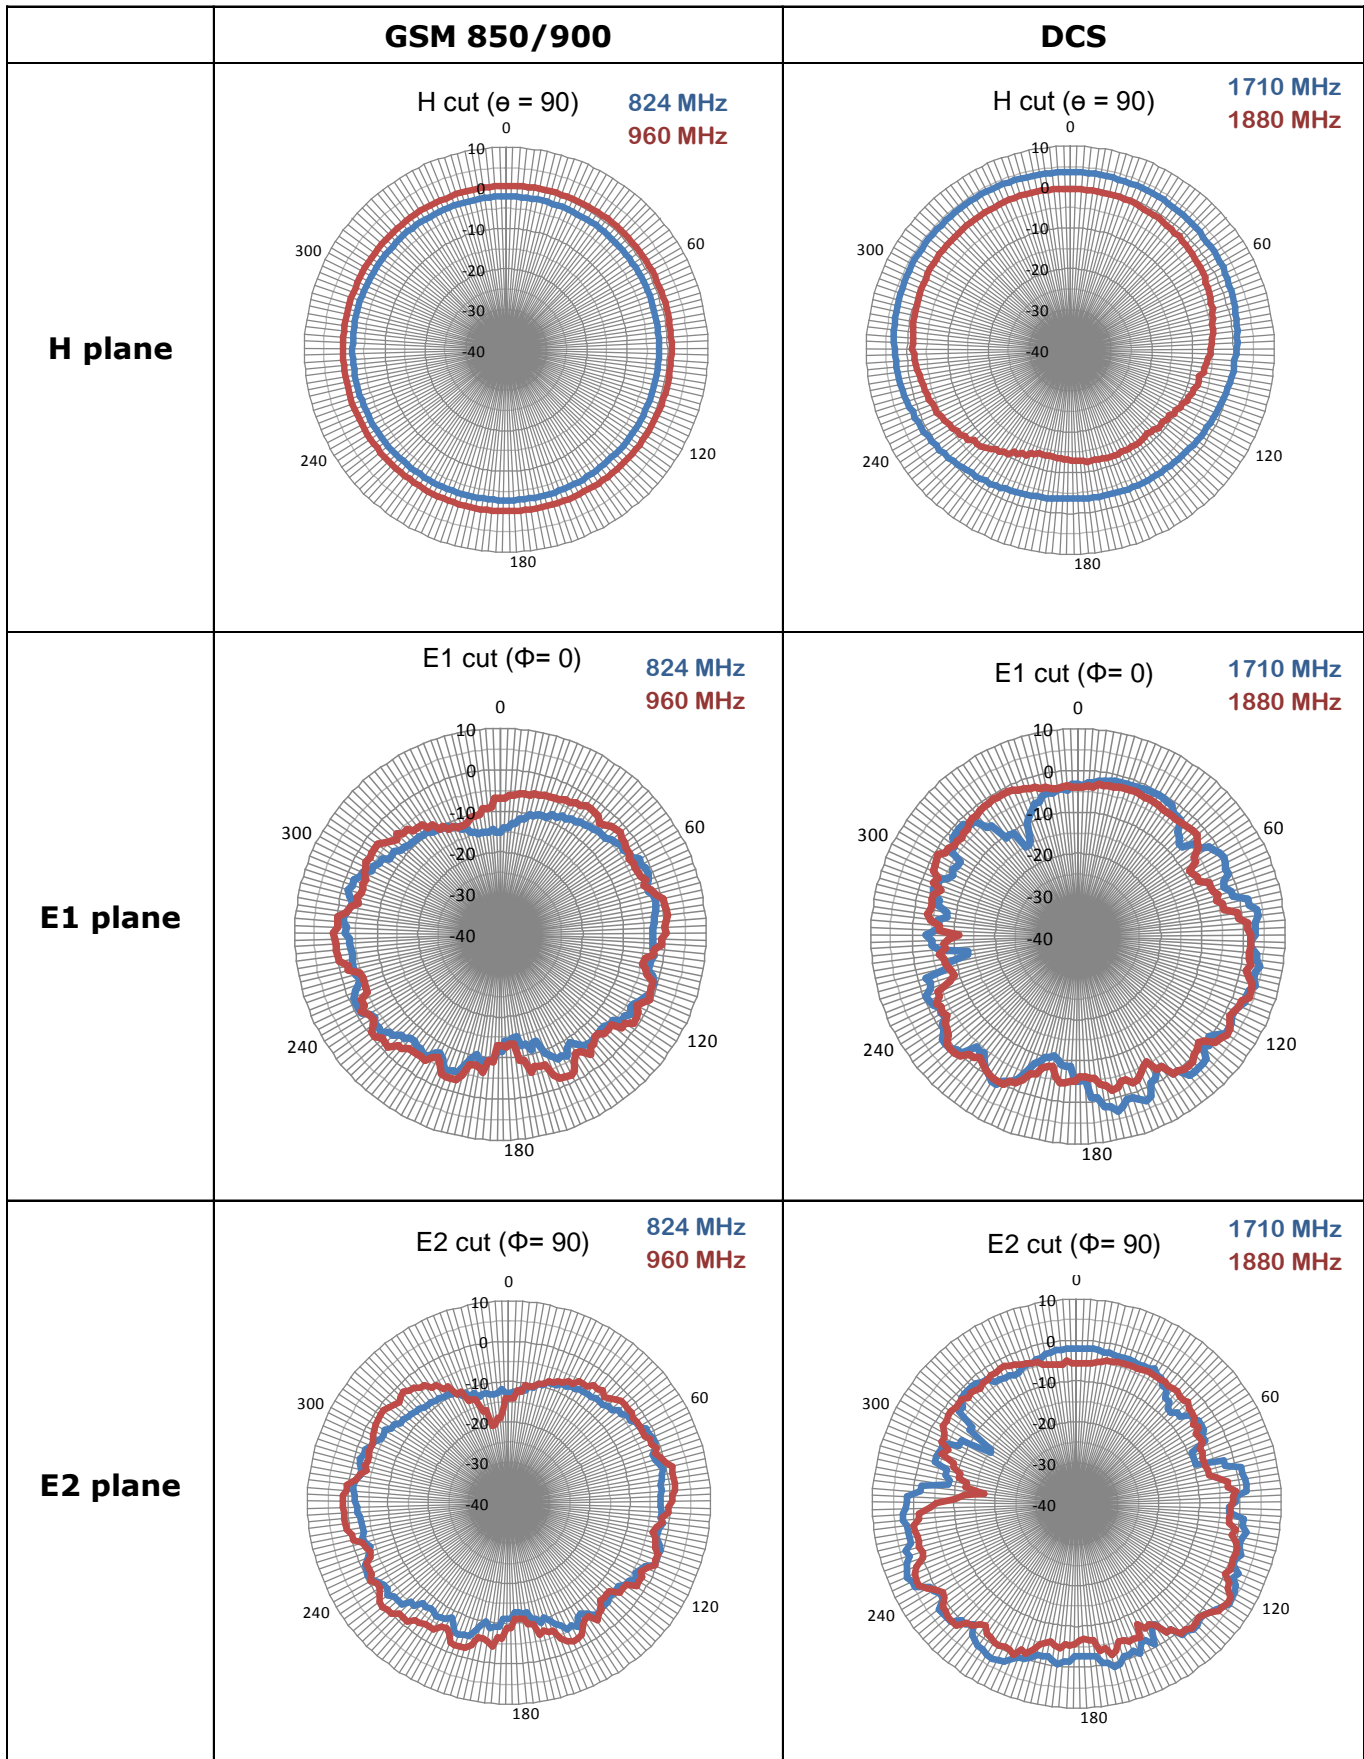


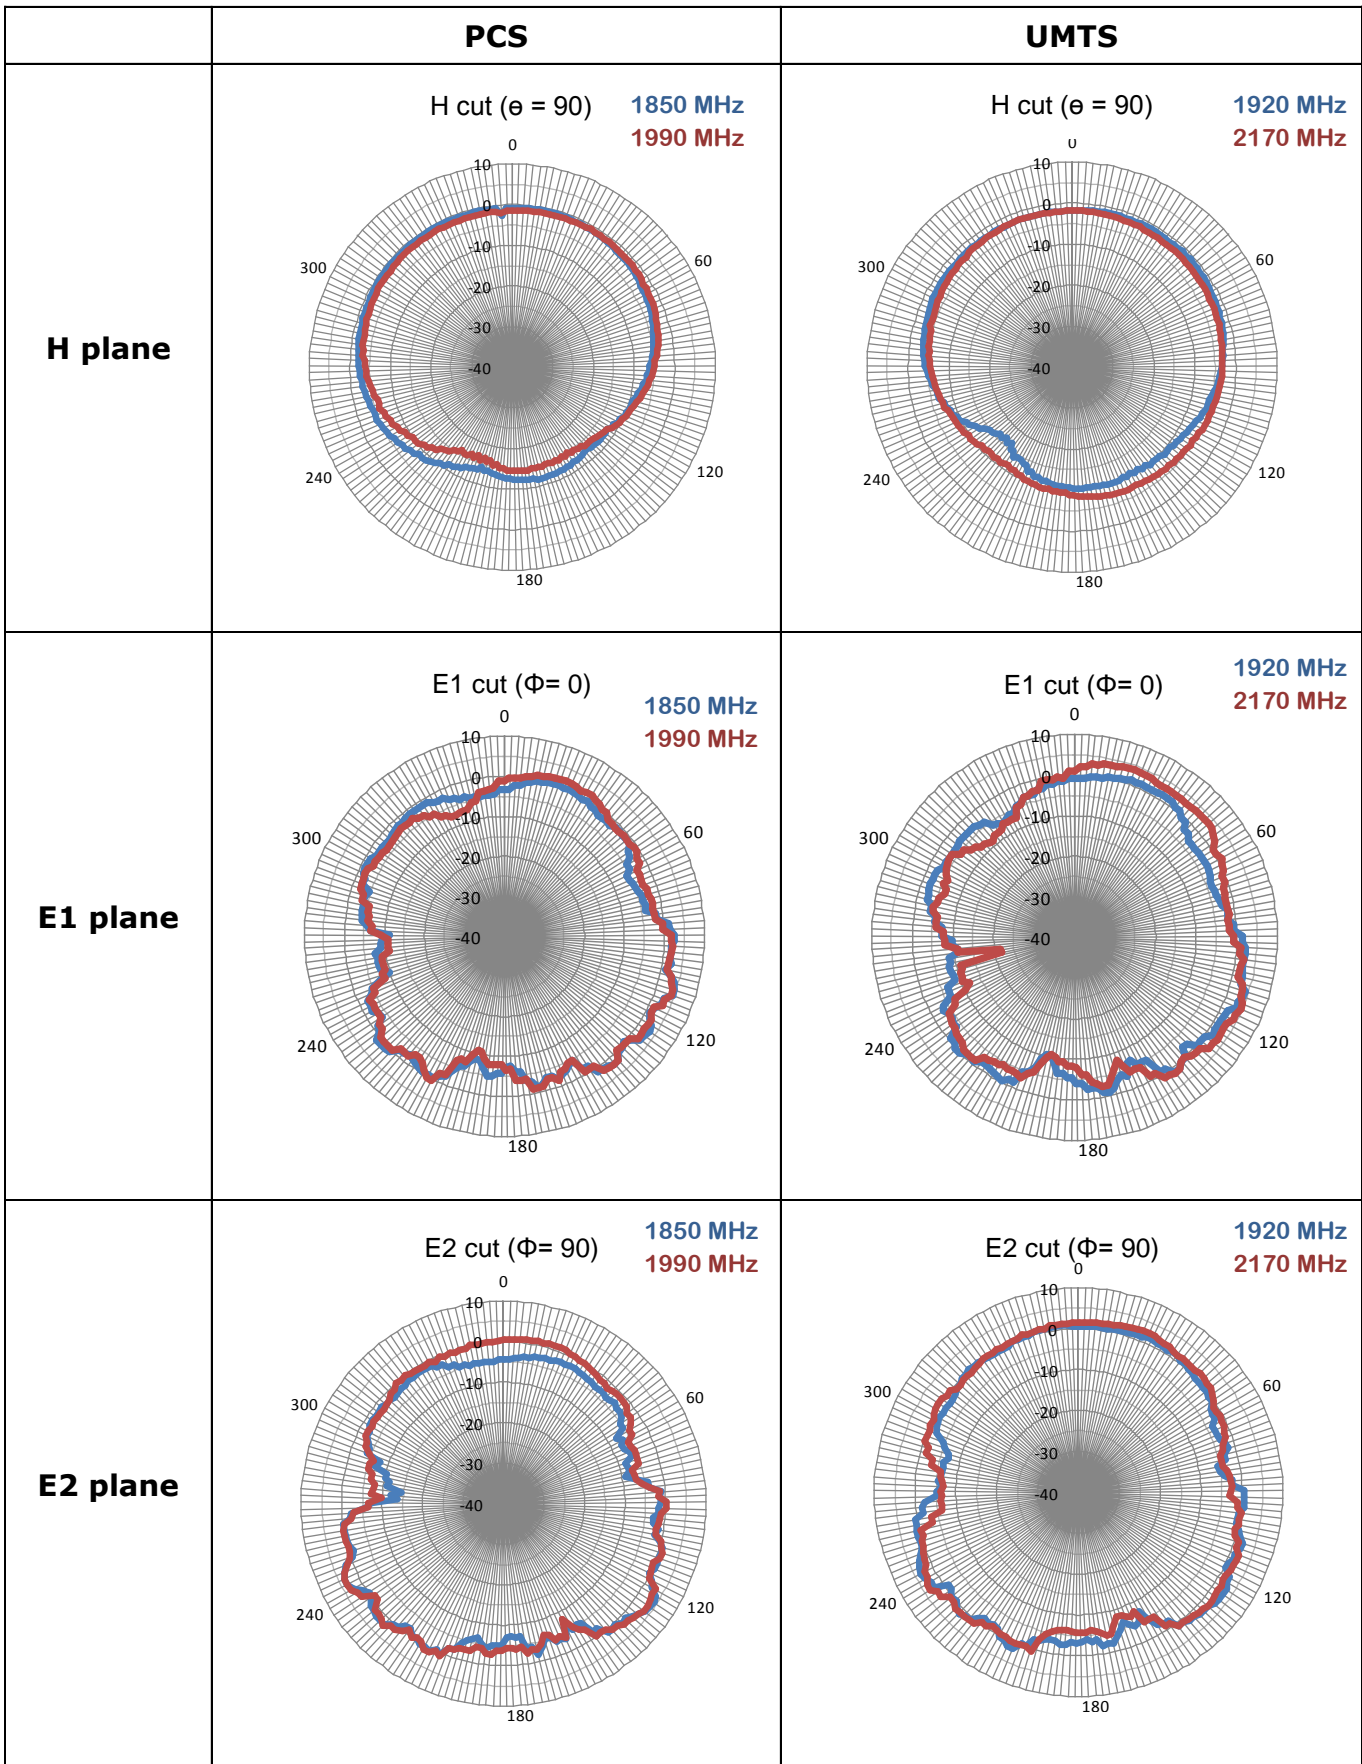

5. PACKING

5.1 Tape Dimension (unit : mm)

5.1.1 Size

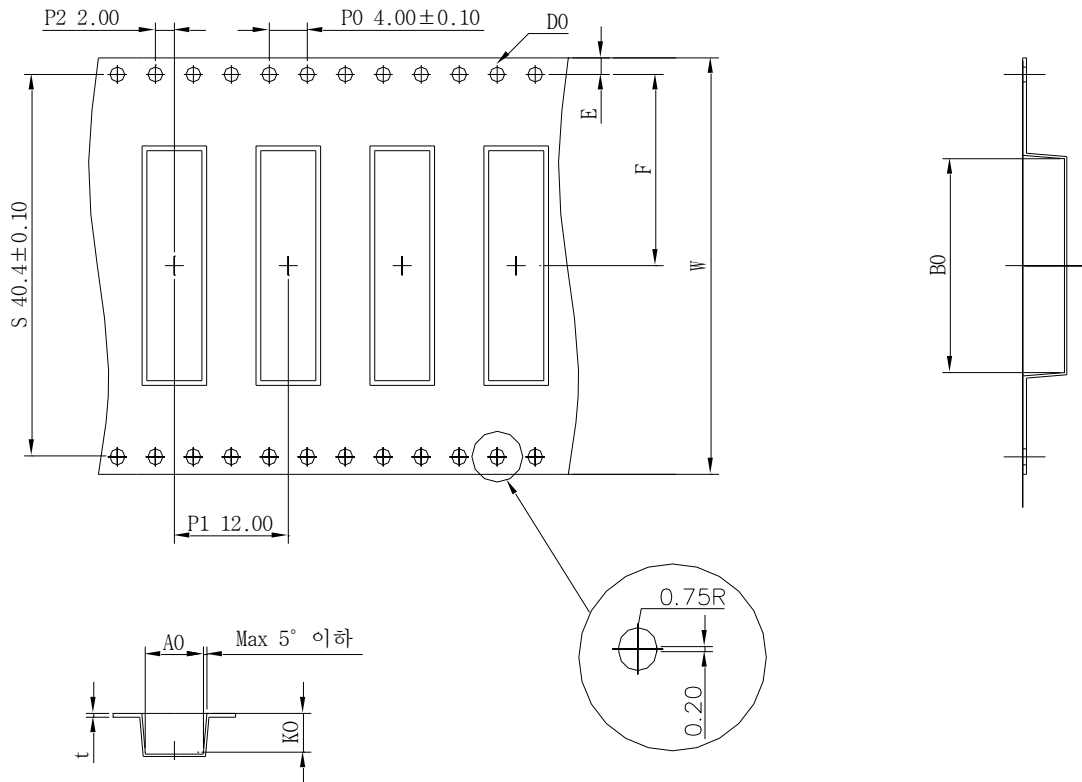


A0	5.80±0.20	E	1.75±0.10
B0	24.30±0.20	F	20.20±0.20
K0	4.60±0.20	W	44.00±0.30
D0	1.55±0.05	t	0.40±0.05

5.1.2 Surface resistance

- 1) Carrier tape : Max $10^{11}\Omega$
- 2) Cover tape : Max $10^{11}\Omega$
- 3) Reel : Max $10^{11}\Omega$

5.2 Description of Reel

5.2.1 Size

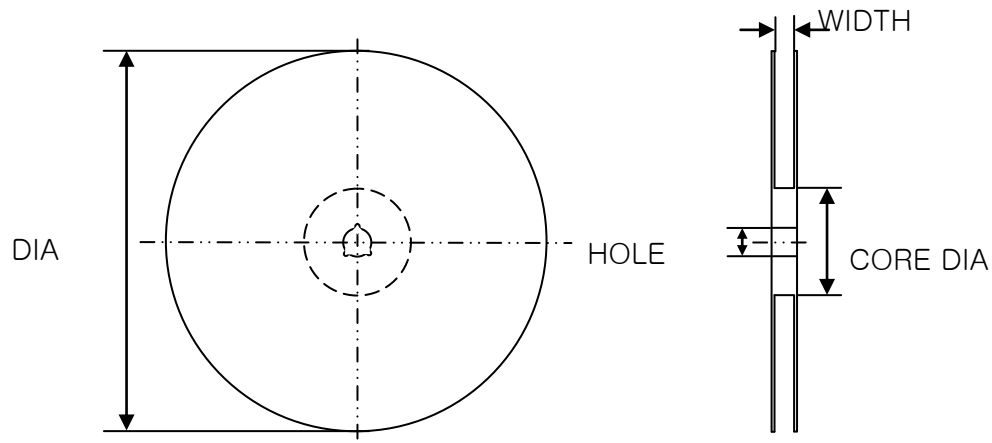

ITEM	DIA	WIDTH	CORE DIA	HOLE
Size(mm)	330.0 ±2	45.5 ± 0.5	100.0 ± 1	13.0 ± 0.3

5.2.2 Material

- 1) Plastic reel : GPPS (General Purpose Poly Styrene) resin

5.3 Description of Packing Box

5.3.1 Reel

Size : 44 (W), Dia.Φ330 (mm)

Quantity : 1,000 ea/reel

5.3.2 Inner Box

Size : 350 (W) x 345 (D) x 55 (T) (mm)

Quantity : 1 reel (1,000 ea/reel × 1 reel = 1,000 ea)



5.3.3 Outer Box

Size : 405 (W) x 360 (D) x 300 (T) (mm)

Quantity : 5 Inner Box (1,000 ea/Inner Box × 5 Inner Box=5,000 ea)



Label

RoHS Compliance