

# Shenzhen Yesok Electronics Power Co., Ltd.

### Branch: HONGKONG YESOK ELECTRONICS POWER CO., LIMITED.

Add: A Building, Lian Tang Keng Industrial Park, Baotian 2nd Road, Xixiang, Baoan, Shenzhen Guangdong, China.

Tel: 86-755-61113030 Fax: 86-755-61113278 Email: sales@yyoss.cn
Website: www.yyoss.cn www.yesokpower.com www.yyoss.com.cn

# 200W Single output waterproof led driver (Constant Voltage Type)

### YSV-200 Series



#### Features


- 1. 3 years warranty
- 2. High efficiency 91%
- 3. Smaller size
- 4. Economical design
- 5. Protections: Short-circuit /Over-load /Over-voltage /Over-temperature / Lightning protection (Alternative)
- 6. Working temperature : -40 °C  $\sim$  + 70 °C
- 7. IP67 design
- 8.  $2\sim3$  times burn-in tests (+50°C/-40°C at full load with over 14 hours)


#### Application

Led strips, electronics display screen, outdoor instruments and machines.....etc

### Specification Sheet

Model	YSV-200 Series	YSV-200-12	YSV-200-24	YSV-200-36	YSV-200-48	
Output	Rated Voltage (Note 1)	12VDC	24VDC	36VDC	48VDC	
	Output Current Range	0 ~ 16.7A	0 ~8.33A	0 ~ 5.55A	0 ~ 4.16A	
	Rated Power	200W	200W	200W	200W	
	Ripple and Noise (Max)(Note 2)	120mVp-p	150mVp-p	150mVp-p	180mVp-p	
	Voltage Tolerance	±3.0%	±3.0%	±2.0%	±2.0%	
	Line Regulation	±1%	±1%	±1%	±1%	
	Load Regulation	±1.0%	±1.0%	±1.0%	±1.0%	
	Set-up, Rise Time	1500ms 80ms/230VAC, 20				
	Hold-up Time	50ms/230VAC at full load, 25ms/110VAC at full load				
Input	Voltage Range	90~130VAC / 170~250VAC				
	Frequency Range	47~63Hz				
	Efficiency (Note 3)	87.5%	89.0%	91.0%	91.5%	
	AC Current	2.5A ~ 0.83A	07.070	71.070	71.370	
	Inrush Current Cold Start at 70A/230VAC, Input at Ta: 25°C cold start.					
	Leakage Current	< 0.5mA at 230VAC, 60Hz Input				
Protection	Over-Voltage 110% ~ 130% (Shut down O/P voltage, repower on to recover)					
	Over-load	0 , 1				
	Short Circuit	Hiccup mode, recovers automatically after faulty problem is removed				
		/e) Gas discharge tube automatically open to discharge, repower on to recover				
	. , ,	7 7 7 7				
	Over-temperature $85^{\circ}\text{C}\pm10^{\circ}\text{C}$ (Shut down O/P voltage, re-power on to recover)					
Environment	<u> </u>	S / /				
	Working Humidity					
	Storage Environment & Humidity					
	TEMP. Coefficient	±0.05%°C (0~50°C)				
	Vibration	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes				
Safety & EMC	Safety Standards	EN-61347-1, EN61347-2-13, IP67, ROHS Tests, Design refer to UL8750				
	Withstand Voltage	I/P-O/P: 3KVAC, IP-FG:1.5KVAC, OP-FG: 500VAC				
	Isolation Resistance	I/P-O/P IP-FG OP-FG: 100M Ohms/500VDC / 25°C / 70% RH				
	EMC Emission	Compliance to EN55015: 2007, EN61547:1995+A1:2000; EN61000-3-2: 2006; EN61000-3-3: 2008				
Others		(Note 5) ≥50000Hrs (25~30°C)				
	No Load power consumption	≤3.0W				
	MTBF (Note 6)	250K hrs min, MIL-HDBK-217F (25℃)				
	Dimension (Note 7)	236*64*45 mm (L*W*H)				
	Packing (Note 8)	15pcs/carton				
	Weight	1.15Kg/pcs				
Notes	All parameter are measured at normal temperature (+25 ~ +28 °C)					
	1. The rated voltage can be customized, such as 18V/27V can be customized					
	2. Ripple & Noisy are measured at 20KHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1 uf & 47uf parallel capacitor (at full load)					
	3. The efficiency measured at Max output voltage, and 230VAC with full load, if with 110VAC the efficiency will be lowered 1% ~ 2%; Working 1~2					
	hours, efficiency will be higher $0.5\% \sim 1\%$ than the initial stage					
	4. This series can work -45°C (at full load), if need related parameter contact us.					
	5. This measured at 120VAC, 80% ~85% load with environmental temperature about +25 °C~+30 °C, the outer housing temperature with +55 °C or so.					
	6. This measured at 120VAC, 80% ~85% load with environmental temperature about +25°C~+30°C, the outer housing temperature with +55°C or so.					
	7. More details see the following mechanical draft.					
	8. The 15pcs packing method is not suitable for led drivers with waterproof connector					

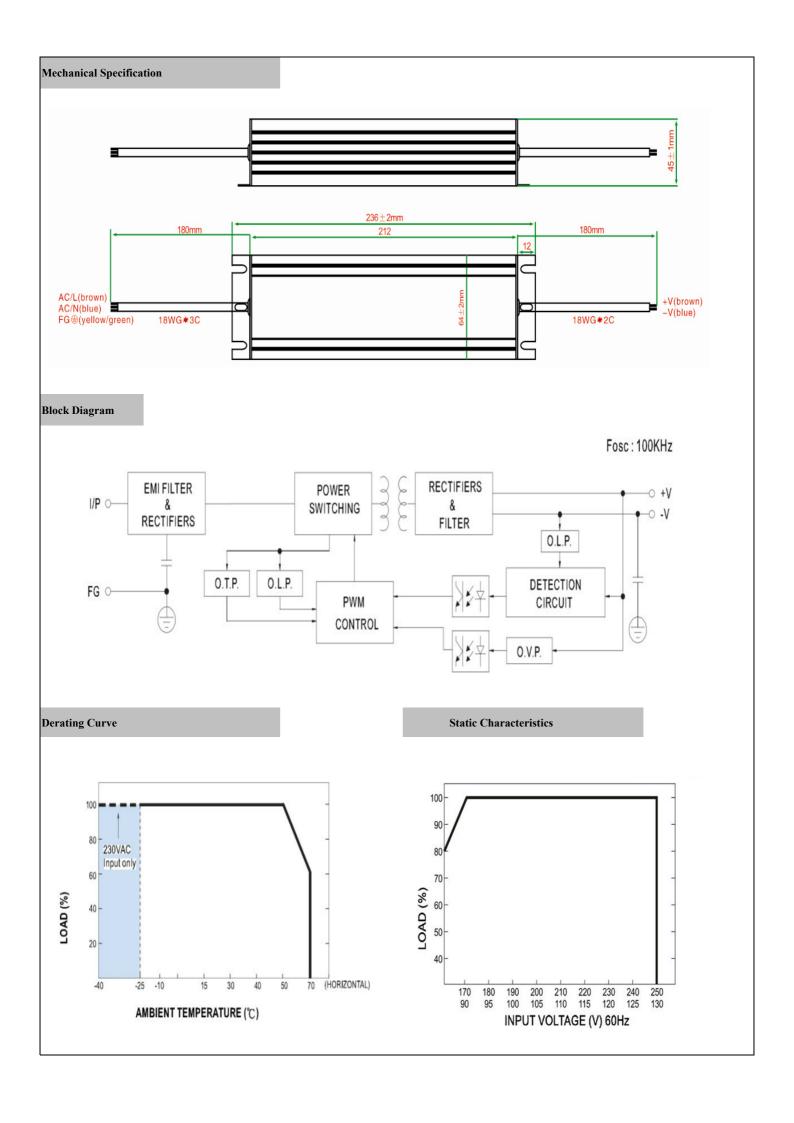

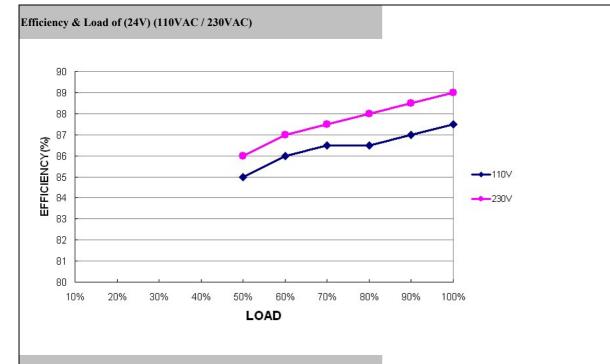

# Waterproof connector (Alternative or customized)

The waterproof connector is usually used to easily assemble and replace in projects. It have waterproof performance when in use.

