

SECAM discriminator IC

BA7007

The BA7007 is a SECAM discriminator suitable for use in video cassette recorders. The BA7007 includes a pre-limiter circuit, detector, slicer-tuning amplifier and comparator. By adding a ceramic filter, and LC circuit for the $f_H/2$ oscillation frequency, and a few resistors and capacitors it is possible to construct an extremely sensitive SECAM discriminator using a simple circuit with low space requirements that will lead to lower costs, and better performance and reliability.


●Applications

SECAM discriminator for VCRs.

●Features

- 1)Extremely stable SECAM discrimination even with power supply and burst-signal input level fluctuations.
- 2)Digital conversion-type integration is used to ensure a large noise margin, and give high sensitivity.
- 3)Low variation in discriminator sensitivity means that adjustment is not necessary.
- 4)Few external components required.
- 5)Large current output capacity.

●Block diagram

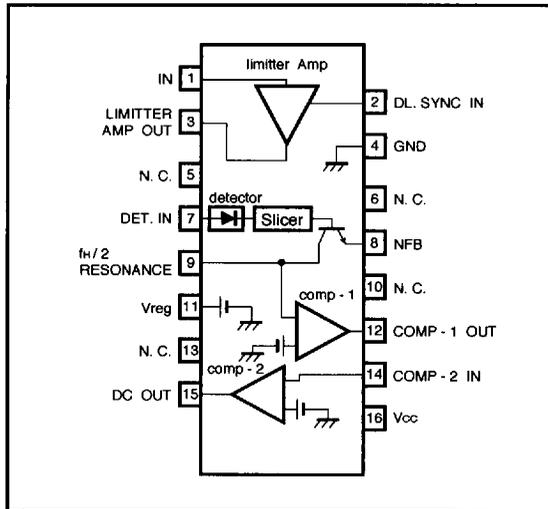

7828999 0022610 346

ROHM

● Absolute maximum ratings (Ta=25°C)

| Parameter | Symbol | Limits | Unit |
|-----------------------|------------------|---------|------|
| Power supply voltage | V _{CC} | 15 | V |
| Power dissipation | P _d | 400 * | mW |
| Operating temperature | T _{opr} | -25~75 | °C |
| Storage temperature | T _{stg} | -55~125 | °C |

* Reduced by 4mW for each increase in Ta of 1°C over 25°C.

● Electrical characteristics (Unless otherwise specified Ta=25°C and V_{CC}=9V)

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Conditions | Measurement Circuit |
|---------------------------------|--------------------|------|------|------|------------------|---|---------------------|
| Quiescent current | I _o | — | 10 | 15 | mA | Limiter amplifier off, no output | Fig.1 |
| Limiter amplifier gain | G _{V1-4} | 11 | 15 | 19 | dB | V _{IN} =0.1V _{P-P} ; f=10kHz, R _L =100kΩ | Fig.1 |
| Limiter amplifier maximum gain | V _{O4} | 0.9 | 1.25 | 1.6 | V _{P-P} | V _{IN} =0.1V _{P-P} ; f=10kHz, R _L =100kΩ | Fig.1 |
| Extracted pulse threshold | V _{TH} | — | 0.6 | — | V | Pin 2 voltage | Fig.1 |
| Tuning amplifier output voltage | V _{O10} | 0.2 | 1.35 | 2.5 | V _{P-P} | V=0.2V _{P-P} ; f=10kHz | Fig.1 |
| Tuning amplifier supply voltage | V ₁₀ | — | 4.3 | — | V | R _L =10kΩ | Fig.1 |
| DC output voltage | V _{15ON} | 6.5 | 8.2 | — | V | R _L =510Ω | Fig.1 |
| DC output leakage voltage | V _{15OFF} | — | 0.0 | 0.5 | V | R _L =100kΩ | Fig.1 |

● Measurement circuit

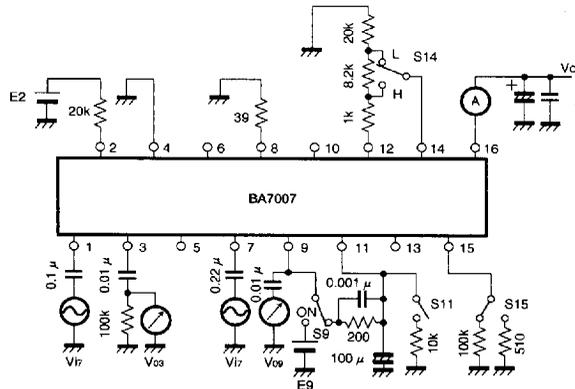


Fig.1

| | E2 | E9 | S9 | S11 | S14 | S15 |
|-------------------------------------|------|------|-----|-------|-----|------|
| I _{CC} | 0 | 0 | OFF | OPEN | L | 100k |
| G _{V2-3} , V ₀₃ | 2.5V | 0 | OFF | OPEN | L | 100k |
| V ₀₉ | 0 | 0 | OFF | OPEN | L | 100k |
| V ₁₁ | 0 | 0 | OFF | CLOSE | L | 100k |
| V _{15ON} | 0 | 6.5V | ON | OPEN | H | 510 |
| V _{15OFF} | 0 | 6.5V | ON | OPEN | L | 100k |

7828999 0022611 282

●Application example

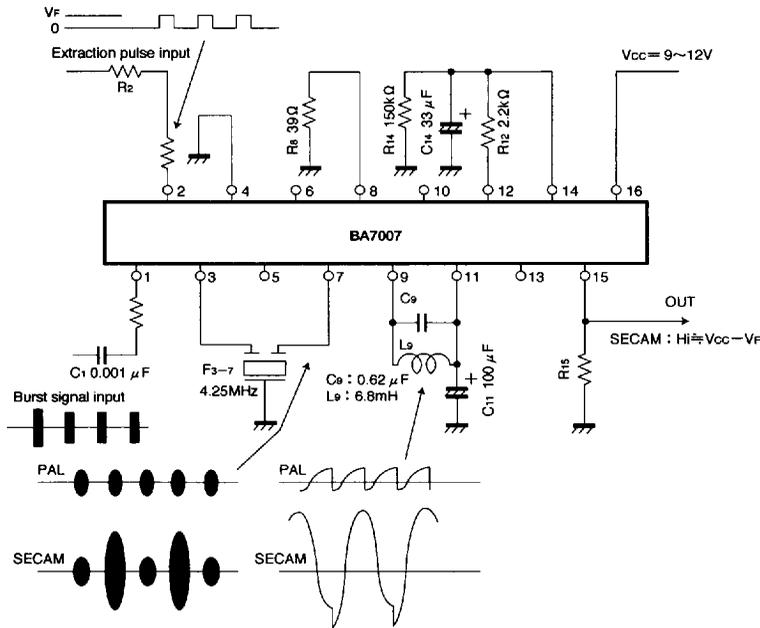



Fig.2

| | |
|------------------------------------|---|
| C ₁ | Limiting amplifier input coupling capacitor |
| R ₂ | Extraction pulse current limiting resistor |
| F ₃₋₇ | 4.25MHz band-pass filter (impedance: 1k Ω) (It is also possible to use a 4.4MHz filter, but there will be a slight drop in discrimination sensitivity). Input/output impedance: 1k Ω |
| R ₈ | Resistor for adjusting the tuning amplifier output level |
| C ₉ L ₉ | For f _{H2} resonator circuit |
| C ₁₁ | Ripple filter (for LC resonator circuit) |
| C ₁₂ C ₁₄ | Components that determine the discrimination time (charge/discharge time constant) |
| R ₁₄ | Charging time constant = R ₁₂ and C ₁₄ Discharge time constant = R ₁₄ and C ₁₄ |
| R ₁₅ | Resistor for absorption of output leakage |

7828999 0022612 119

ROHM

●External dimensions (Units: mm)

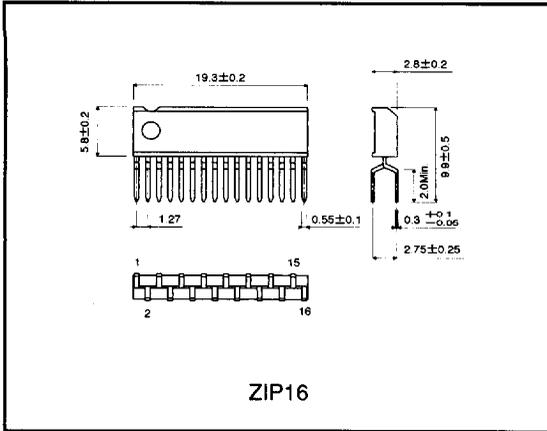

PAL/SECAM detector

VCR components

7828999 0022613 055

ROHM