
TABLE 1:ELECTRICAL SPECIFICATIONS AT 25 °CSWITCHING TRANSFORMER DESIGNED FOR USE WITH POWER INTEGRATIONSTOP223Y.REFER TO APPLICATION CIRCUIT OF FIGURE 3.

SPEC LIMITS			
MIN.	TYP.	MAX.	UNITS
950	1060	1170	μHY
	1:6.083 1:14.60		±3% ±3%
	30.0	45.0	μHY
3000 3000			Vrms Vrms
85 0.0 0.0	15.0 1.0 2.5 17.0	265 1.0 2.0	Vac Vdc Amps Amps % % Vdc
	MIN. 950 3000 3000 85 0.0	MIN. TYP. 950 1060 1:6.083 1:14.60 30.0 3000 3000 3000 3000 3000 3000 15.0 1.0 2.5	MIN. TYP. MAX. 950 1060 1170 1:6.083 30.0 45.0 3000 30.0 3000 85 1.0 0.0 1.0 2.0 1.0 2.5

PHYSICAL DIMENSIONS mm (INCHES)

FIGURE 2:

FIGURE 1: SCHEMATIC DIAGRAM



NOTE1:


REINFORCED INSULATION SYSTEM, UL1950, IEC950, CSA-950: A) ALL MATERIALS MEET "UL", "CSA" & "IEC" REQUIREMENTS

B) TRIPLE BASIC INSULATED SECONDARY.

- C) DESIGNED TO MEET >6.2mm CREEPAGE REQUIREMENTS.
- D) VARNISH FINISHED ASSEMBLY.
- E) UL1950 & CSA-950 CERTIFIED: FILE #E162344.
- F) UL CLASS (B) 130 INSULATION SYSTEM PM130-R1, PM130-H1, PM130-H1A (UL FILE #E177139) OR ANY UL
 - AUTHORIZED CLASS (B) INSULATION SYSTEM.



SHEET: 1 OF 6

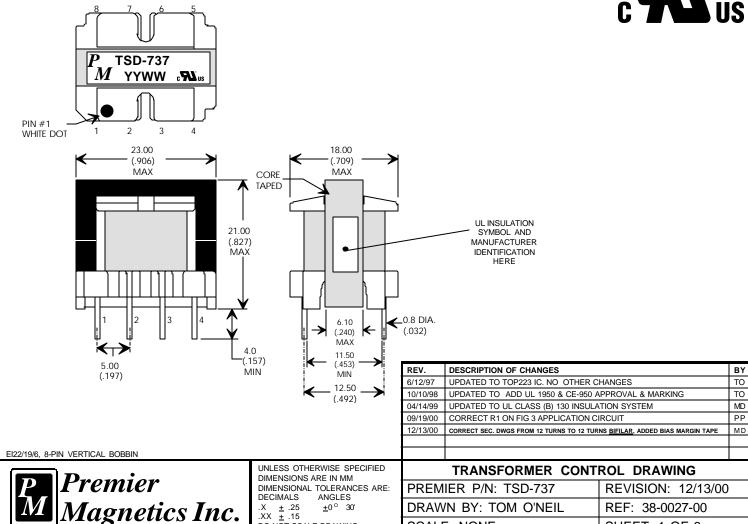

SCALE: NONE

DO NOT SCALE DRAWING

APPLICATION NOTES

Premier Magnetics' TSD-737 Switch Mode Transformer was designed for use with Power Integrations, Inc. TOP223Y three terminal off-line PWM switching regulator in a low cost Isolated Flyback Buck-Boost circuit configuration. The feedback implementation is accomplished indirectly by regulating the bias winding voltage. This is the lowest cost topology but has the drawback of poor load regulation. As such this topology is intended for use where load power is fairly constant. Resistor R2 provides an output clamp to prevent output voltage runaway and possible circuit damage under a no load condition.

The TOPXXX series from Power Integrations, Inc. are self contained 100KHz three terminal voltage controlled PWM switching regulators. This series contains all necessary functions for an off-line switch mode controlled DC power source. These switching regulators provide a very simple solution to off-line designs. The inductors and transformer used with the TOPXXX are critical to the performance of the circuit. They define the overall efficiency, output power and overall physical size.

Below is a universal input 15 watt application circuit utilizing Power Integrations TOP223 switching regulator in the isolated flyback buck-boost configuration. The component values listed are intended for reference purposes only.

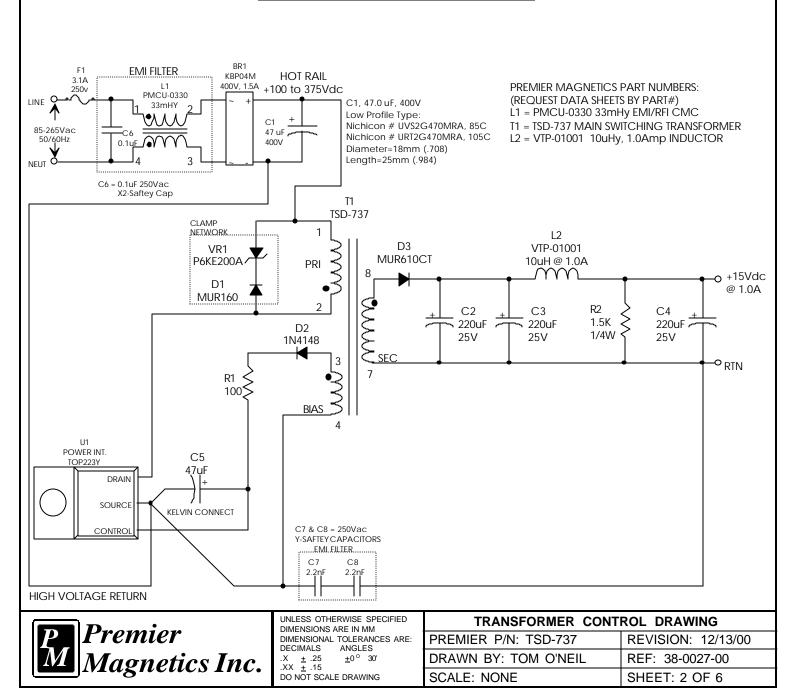


FIGURE 3: TYPICAL APPLICATION CIRCUIT