

# **Application Note: LoRa<sup>®</sup> Modulation Crystal Oscillator Guidance**

---

## Table of Contents

1. Introduction.....	3
2. LoRa® Modulation.....	3
3. LoRa® Modulation Crystal Specifications.....	3
3.1. Frequency Tolerance.....	4
3.2. G – Acceleration Sensitivity.....	5
4. Recommended Crystal Manufacturers.....	8
5. Recommended 32 MHz TCXO Manufacturers for Specific Applications if Required.....	9
6. Conclusion.....	9
7. Revision History.....	10
8. References.....	10

## List of Figures

Figure 1: LoRa® PER versus Relative Crystal Oscillator Frequency Offset.....	4
Figure 2: Instantaneous Frequency during one Vibration Cycle.....	5
Figure 3: Effect of Acceleration due to Shock on a Crystal-Referenced PLL Transmitted Carrier.....	6
Figure 4: Magnitude of Acceleration Relative to Crystal Package.....	7

## List of Tables

Table 1: Typical Crystal Specification.....	3
Table 2: LoRa® Modulation Recommended Crystal Manufacturers.....	8
Table 3: LoRa® Modulation Recommended TCXO Manufacturers.....	9

# 1. Introduction

The purpose of this application note is to assist the engineer with the selection of a suitable crystal oscillator for the LoRa® modulation family of long-range wireless ISM transceiver devices.

It is recommended to read this application note in conjunction with Semtech Application Note AN1200.07, “Improving the Accuracy of a Crystal Oscillator” [1], for further information on crystal oscillator specifications and parameters.

## 2. LoRa® Modulation

The LoRa® modulation is a spread-spectrum technique that uses wideband linear frequency modulated pulses to encode information, whose frequency increases or decreases over a certain amount of time.

As with other spread-spectrum modulation techniques, LoRa® uses the entire channel bandwidth to broadcast a signal, making it robust to channel noise. In addition, because LoRa® modulation uses a broad band of the spectrum, it is also resistant to long term relative frequency error, multi-path fading and Doppler effects.

## 3. LoRa® Modulation Crystal Specifications

The crystal specifications for LoRa® modulation is given in Table 1. It can be observed that the crystal specifications for Semtech’s family of LoRa® modulation transceivers is similar to those of existing Semtech FSK ISM transceivers. Since the internal oscillator drive circuitry of Semtech transceivers are similar, no special IP is required to condition the oscillator.

**Table 1: Typical Crystal Specification**

Symbol	Description	Conditions	Min	Typ	Max	Unit
F <sub>XOSC</sub>	Crystal Frequency		26	32	32	MHz
R <sub>S</sub>	Crystal Series Resistance	For SX1272, SX1276 and SX1261/2/8 <sup>1</sup>	-	30	<b>40</b>	Ω
R <sub>S</sub>	Crystal Series Resistance	For SX1276 and SX1261/2/8 <sup>2</sup>	-	30	<b>60</b>	Ω
R <sub>S</sub>	Crystal Series Resistance	For SX1276 <sup>3</sup>	-	30	<b>100</b>	Ω
C <sub>0</sub>	Crystal Shunt Capacitance		-	2.8	7	pF
C <sub>FOOT</sub>	External Foot Capacitance	On each pin XTA and XTB for SX1272 and SX1276	8	15	22	pF
C <sub>LOAD</sub>	Crystal Load Capacitance		6	10	12	pF
F <sub>TOL</sub>	Initial Frequency Tolerance		-	±10	±30	ppm
F <sub>TEMP</sub>	Temp. Characteristics	Application specific	-	-	-	ppm
F <sub>AGING</sub>	Aging Characteristics	Application specific	-	-	-	ppm
G <sub>S</sub>	Acceleration Sensitivity	Application specific <sup>4</sup>	-	2	-	ppb/G

<sup>1</sup> Crystals with R<sub>S</sub> (max) ≤ 40 ohms can be used with SX1272, SX1276, SX1261, SX1262 and SX1268 designs

<sup>2</sup> Crystals with R<sub>S</sub> (max) ≤ 60 ohms can be used with SX1276 and SX1261, SX1262 and SX1268 designs

<sup>3</sup> Crystals with R<sub>S</sub> (max) ≤ 100 ohms can be used with SX1276 designs only

<sup>4</sup> Refer to *Section 4*

There are two crystal specifications that warrant further analysis:

- Frequency Tolerance
- G or Acceleration Sensitivity


## 3.1. Frequency Tolerance

The frequency or calibration tolerance, expressed in ppm, is typically an application-specific parameter.

Usually modulation techniques offering sensitivity performances similar to LoRa® such as narrow-band FHSS or high spreading factor DSSS typically require a crystal oscillator tolerance of only a few ppm to ensure both frequency and symbol rate accuracy.

As previously highlighted, the LoRa® modulation technique is impervious to the relative initial frequency error (and subsequently symbol rate tolerance) between the transmitter and the receiver.

This immunity to both frequency and symbol tolerance are illustrated in Figure 1.

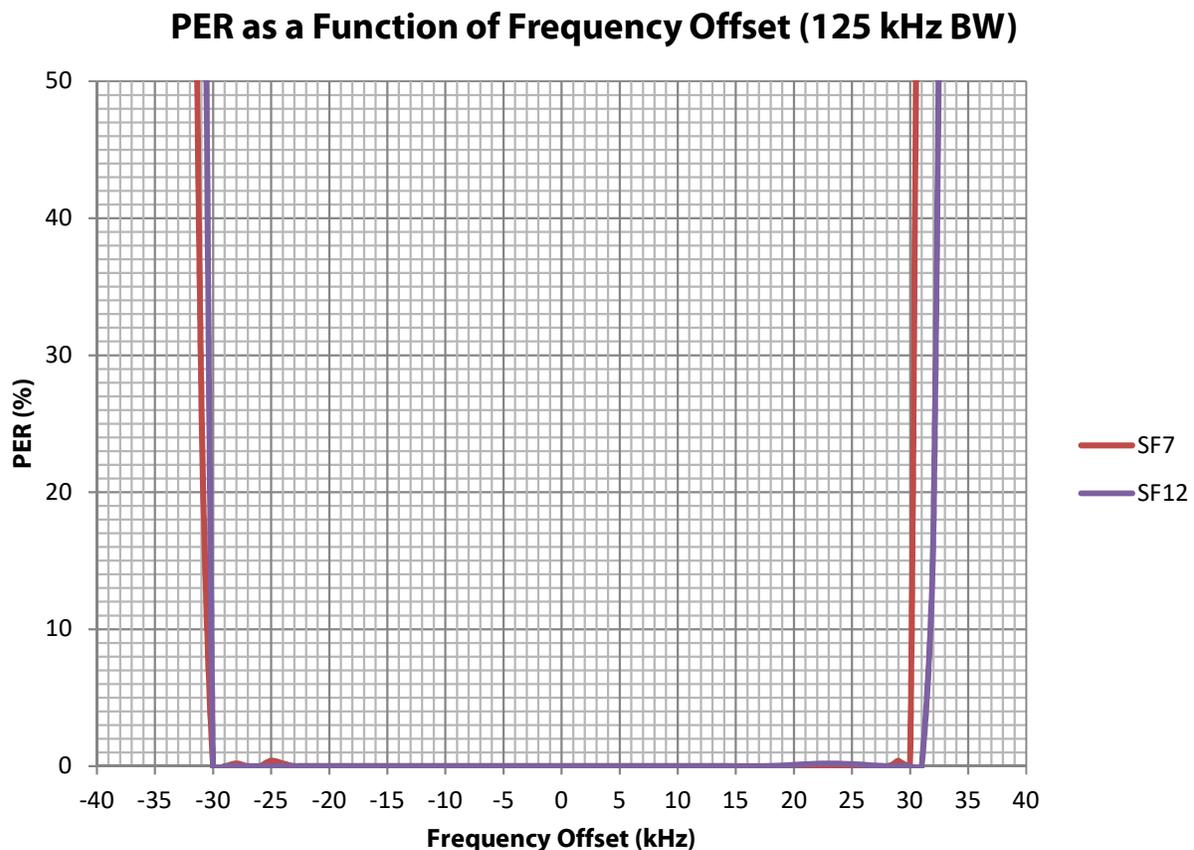

**Figure 1: LoRa® PER versus Relative Crystal Oscillator Frequency Offset**

The figure indicates that frequency tolerances of typically  $\pm 25\%$  of the LoRa® modulation bandwidth can be withstood and still maintain a 10% PER link. This compares favorably with current high-link budget systems.

## 3.2. G – Acceleration Sensitivity

G or acceleration sensitivity is a measurement of the sensitivity of a crystal oscillator to acceleration, and describes a short-term or instantaneous frequency error.

A crystal oscillator subject to acceleration or mechanical shock has a slightly different series resonant frequency than the same oscillator experiencing no acceleration. It has been observed that the magnitude of the frequency shift is proportional to both the magnitude and the direction of the acceleration relative to a coordinate system applied to the crystal. [2]

A representation of this effect can be considered in the case of a crystal subject to a cycle of acceleration at a rate of  $f_v$ :

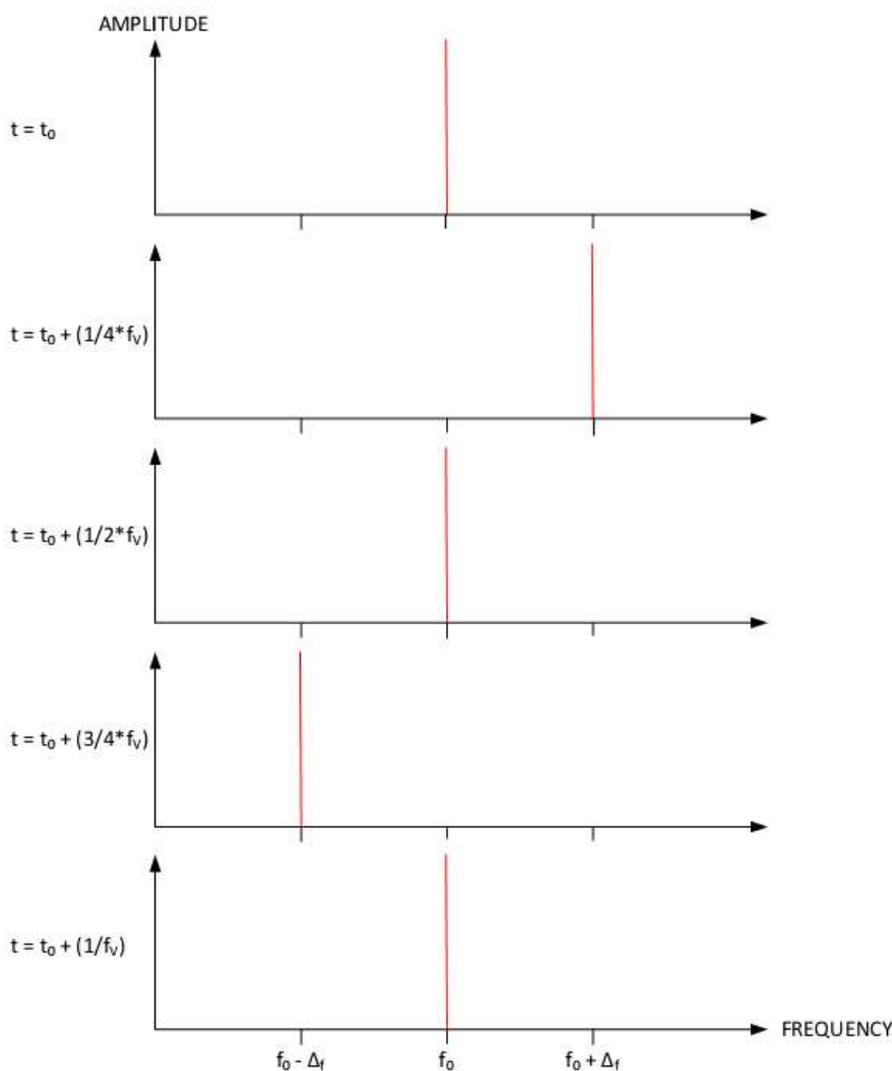



Figure 2: Instantaneous Frequency during one Vibration Cycle

Each plot shows the instantaneous output frequency sampled at a time period  $n/4 * f_c$ . If we consider the rate of acceleration to be sinusoidal, it can be observed that the instantaneous frequency deviation occurs at the crest and trough of the applied sinusoidal force.

It can be shown that the magnitude of the instantaneous frequency deviation is proportional to the instantaneous amplitude of the acceleration. [2]


This can be viewed practically by observing the effect of acceleration or shock on the spectrum of a phase-locked loop carrier implemented with a crystal oscillator that does not have a low-G sensitivity crystal specified, as illustrated in Figure 3.

Applying an acceleration force to the crystal causes an instantaneous change in frequency. The apparent amplitude of the instantaneous frequency is limited only by the measurement instrumentation.

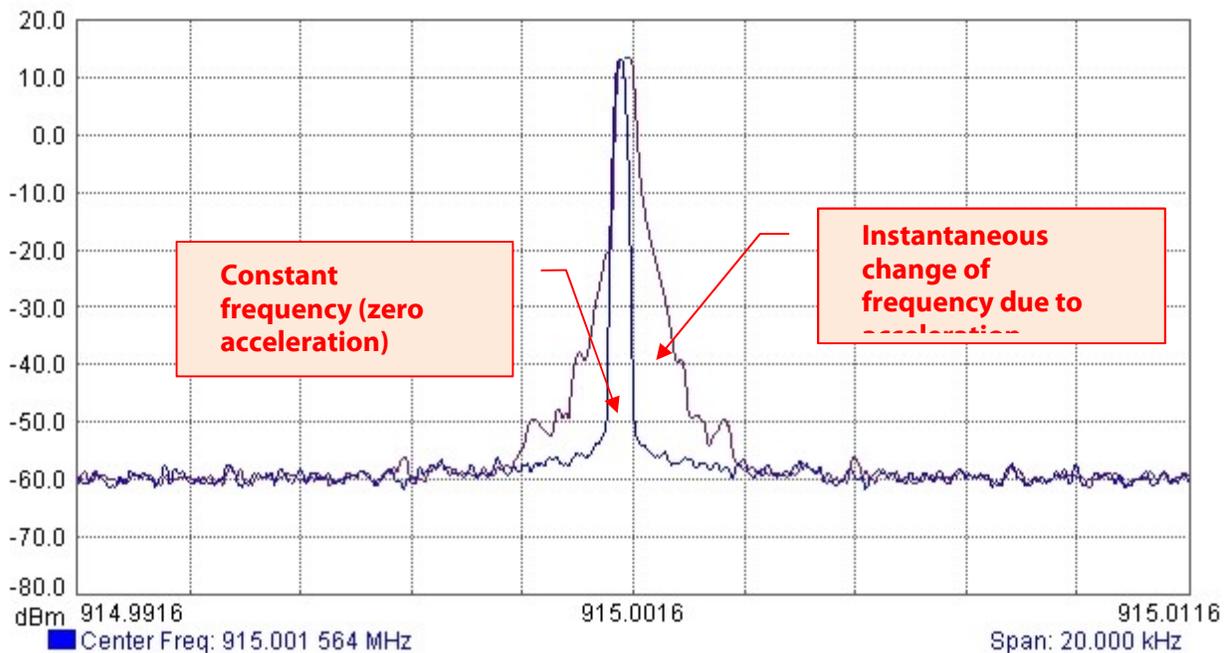

**Figure 3: Effect of Acceleration due to Shock on a Crystal-Referenced PLL Transmitted Carrier**

As it has been noted, the magnitude of the instantaneous frequency shift is also proportional to the direction of the acceleration relative to a coordinate system applied to the crystal. As illustrated in Figure 4 it can be observed that the resultant acceleration vector is proportional to both the magnitude of the acceleration,  $\Gamma_G$ , and relative angle ( $\Theta$ ,  $\Phi$ ) applied. [3]

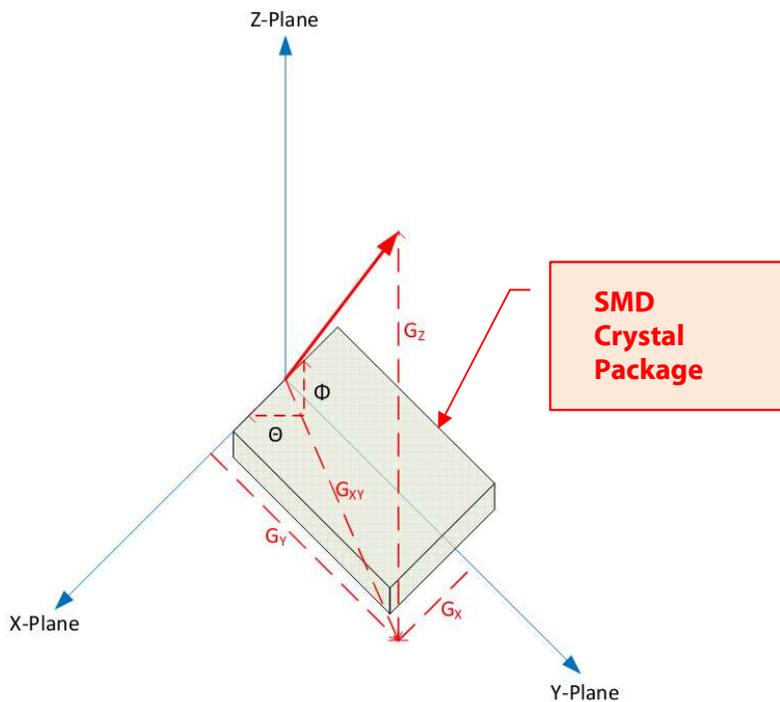

**Figure 4: Magnitude of Acceleration Relative to Crystal Package**

## 4. Recommended Crystal Manufacturers

Crystal manufacturers familiar with the requirements for GPS receiver designs are able to recommend a suitable crystal for a given application and can also advise as to orientation.

Loading capacitance must be applied externally and adapted to the actual *Load* specifications of the crystal, to center the LO frequency. Load capacitors value can slightly vary depending on the selected crystal part number and PCB design.

Currently Semtech LoRa® transceiver reference designs use only 32 MHz low-G sensitivity crystals from the following manufacturers below. Contact directly crystal manufacturer sales representative to validate crystal specifications by selecting the desired part number below.

**Table 2: LoRa® Modulation Recommended Crystal Manufacturers**

Manufacturer	Website	Package Size	Model / Reference Part Number
Rakon	<a href="http://temexpress.com/en/index">http://temexpress.com/en/index</a>	3.2x2.5mm	FTR5092-A3 <sup>1</sup>
		2.0x1.6mm	FTR5123-B0 <sup>1</sup>
NDK	<a href="http://www.ndk.com/en/products/search/crystal/index.html">http://www.ndk.com/en/products/search/crystal/index.html</a>	2.5x2.0mm	NX2520SA / EXS00A-CS00131 <sup>2</sup>
		2.0x1.6mm	NX2016SA / EX500A-CS06465 <sup>2</sup>
Epson	<a href="http://www5.epsondevice.com/en/ic_partners/info.html">http://www5.epsondevice.com/en/ic_partners/info.html</a>	2.0x1.6mm	FA-128 / Q22FA1280058900 <sup>1</sup>
			FA-128 / Q22FA1280053000 <sup>2</sup>
Taitien	<a href="http://www.taitien.com/crystal-oscillator/">http://www.taitien.com/crystal-oscillator/</a>	3.2x2.5mm	S0197-X-002-3 <sup>1</sup>
KDS	<a href="http://www.kds.info/product/">http://www.kds.info/product/</a>	2.0x1.6mm	DSX211SH-32MHz 1ZZHAE32000AA0B <sup>1</sup>
		3.2x2.5mm	DSX321G-32MHz 1C232000AA0Q <sup>1</sup>
Murata	<a href="http://www.murata.com/en-global/products/quartzdevice/">http://www.murata.com/en-global/products/quartzdevice/</a>	2.0x1.6mm	XRCGB32M000F1H17R0 <sup>1</sup>
			XRCGB32M000F1H18R0 <sup>1</sup>
Kyocera	<a href="http://www.kyocera-crystal.jp/eng/prdct/list/xtal/#02">http://www.kyocera-crystal.jp/eng/prdct/list/xtal/#02</a>	2.0x1.6mm	CX2016DB32000F0FFFC2 <sup>2</sup>
NSK	<a href="http://www.nsk.com.tw/product.asp?lv=0&amp;id=2">http://www.nsk.com.tw/product.asp?lv=0&amp;id=2</a>	2.0x1.6mm	NXN32.000AG10F-DKAB12 <sup>1</sup>
TXC	<a href="http://www.txccorp.com/">http://www.txccorp.com/</a>	3.2x2.5mm	7M32070024 <sup>1</sup>
	<a href="http://www.txccorp.com/">http://www.txccorp.com/</a>	2.0x1.6mm	8Y32070018 <sup>2</sup>
Petermann Technik	<a href="https://www.petermann-technik.com/products/quartz-crystal-configurator/details/smd-crystal-20x16-mhz.html/">https://www.petermann-technik.com/products/quartz-crystal-configurator/details/smd-crystal-20x16-mhz.html/</a>	2.0x1.6mm	QEU9310085 <sup>1</sup>
		2.0x1.6mm	QEU9310084 <sup>1</sup>
	<a href="https://www.petermann-technik.com/products/quartz-crystal-configurator/details/smd-crystal-32x25-mhz.html/">https://www.petermann-technik.com/products/quartz-crystal-configurator/details/smd-crystal-32x25-mhz.html/</a>	3.2x2.5mm	QEU9010802 <sup>1</sup>
		3.2x2.5mm	QEU9010927 <sup>1</sup>

<sup>1</sup> Crystals with  $R_s(\max) \leq 40$  ohms can be used with SX1272, SX1276, SX1261, SX1262 and SX1268 designs

<sup>2</sup> Crystals with  $R_s(\max) \leq 60$  ohms can be used with SX1276 and SX1261, SX1262 and SX1268 designs

<sup>3</sup> Crystals with  $R_s(\max) \leq 100$  ohms can be used with SX1276 designs only

Refer to **3.1 LoRa® Modulation Crystal Specifications** section on Page 3.

## 5. Recommended 32 MHz TCXO Manufacturers for Specific Applications if Required

Contact directly crystal manufacturer sales representative to validate TCXO specifications by selecting the desired part number below.

**Table 3: LoRa® Modulation Recommended TCXO Manufacturers**

Manufacturer	Website	Package Size	Model / Reference Part Number
NDK	<a href="http://www.ndk.com/en/products/search/tcxo/index.html">http://www.ndk.com/en/products/search/tcxo/index.html</a>	2.0x1.6mm	NT2016SA / END4263A
		2.0x1.6mm	NT2016SB / END4329A
		1.6x1.2mm	NT1612AA / END5490A
Rakon	<a href="http://temexpress.com/en/index/">http://temexpress.com/en/index/</a>	3.2x2.5mm	IT3205CE 32.000MHz
		2.0x1.6mm	IT2105 32.000MHz
Taitien	<a href="http://www.taitien.com/vctcxo-tcxo/">http://www.taitien.com/vctcxo-tcxo/</a>	3.2x2.5mm	S0197-T-004-3
Epson	<a href="http://www5.epsondevice.com/en/ic_partners/info.html">http://www5.epsondevice.com/en/ic_partners/info.html</a>	2.0x1.6mm	TG2016SMN / X1G0054410105xx
KDS	<a href="http://www.kds.info/product/">http://www.kds.info/product/</a>	2.0x1.6mm	T16-0626A-DSB211SDN-32MHz-1XXD32000PCA
Kyocera	<a href="http://www.kyocera-crystal.jp/eng/prdct/list/tcxo/">http://www.kyocera-crystal.jp/eng/prdct/list/tcxo/</a>	2.0x1.6mm	KT2016K32000ACW18YAS
TXC	<a href="http://www.txccorp.com/">http://www.txccorp.com/</a>	2.0x1.6mm	7Z32070002

## 6. Conclusion

Since LoRa® modulation contains both relative time and frequency information it can be deduced that any short-term frequency variance could lead to incorrect detection of encoded data.

Thus it is recommended that for those applications which may be subject to acceleration forces, such as shock or vibration, for example where the SX1272 transceiver is implemented in a mobile link (such as a hand-held or vehicle mounted application) a low-G crystal is used as the reference oscillator.

In addition, since the resultant acceleration vector has both magnitude and angle components, care should be taken to ensure that both crystal and PCB orientation minimize the acceleration vector.

If in doubt, contact your crystal vendor or Semtech representative.

---

## 7. Revision History

Version	Date	Modifications
1	August 2013	First Release
2	July 2017	Update of crystal manufacturers for 32.0 MHz Crystal and TCXO Migration to the new document template
2.1	August 2018	Update of Murata crystal models Correction of references / Addition of a Revision History chapter
2.2	July 2019	Add new crystal and TCXO models

## 8. References

[1] Semtech Application Note AN1200.07, "Improving the Accuracy of a Crystal Oscillator"

[https://www.semtech.com/uploads/documents/xo\\_precision\\_std.pdf](https://www.semtech.com/uploads/documents/xo_precision_std.pdf)

[2] "The Acceleration Sensitivity of Quartz Crystal Oscillators: A Review", Raymond L Filler (IEEE Transactions on Ultrasonics, Ferroelectrics and Frequency Control, Vol. 35, No.3 May 1988)

[3] Greenway Industries Application Note, "Acceleration Sensitivity of Characteristics of Quartz Crystal Oscillators"



---

## Important Notice

Information relating to this product and the application or design described herein is believed to be reliable, however such information is provided as a guide only and Semtech assumes no liability for any errors in this document, or for the application or design described herein. Semtech reserves the right to make changes to the product or this document at any time without notice. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. Semtech warrants performance of its products to the specifications applicable at the time of sale, and all sales are made in accordance with Semtech's standard terms and conditions of sale.

SEMTECH PRODUCTS ARE NOT DESIGNED, INTENDED, AUTHORIZED OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT APPLICATIONS, DEVICES OR SYSTEMS, OR IN NUCLEAR APPLICATIONS IN WHICH THE FAILURE COULD BE REASONABLY EXPECTED TO RESULT IN PERSONAL INJURY, LOSS OF LIFE OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. INCLUSION OF SEMTECH PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE UNDERTAKEN SOLELY AT THE CUSTOMER'S OWN RISK. Should a customer purchase or use Semtech products for any such unauthorized application, the customer shall indemnify and hold Semtech and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs damages and attorney fees which could arise.

The Semtech name and logo are registered trademarks of the Semtech Corporation. All other trademarks and trade names mentioned may be marks and names of Semtech or their respective companies. Semtech reserves the right to make changes to, or discontinue any products described in this document without further notice. Semtech makes no warranty, representation or guarantee, express or implied, regarding the suitability of its products for any particular purpose. All rights reserved.

© Semtech 2019

---

## Contact Information

Semtech Corporation  
Wireless & Sensing Products  
200 Flynn Road, Camarillo, CA 93012  
E-mail: [sales@semtech.com](mailto:sales@semtech.com)  
Phone: (805) 498-2111, Fax: (805) 498-3804  
[www.semtech.com](http://www.semtech.com)