



Li-MnO₂ Battery

-- CR1/3N Brief Datasheet-

➤ Model: CR1/3N

Nominal Voltage: 3.0Volts

Nominal Capacity: (@1.0mA Discharge Current to 2.0V cut-off, +23°C) 160mAh

Standard Discharge Current: 1.0mA

Maximum recommended current under continuous discharge:

Maximum recommended current under pulse discharge: 80mA

Operational temperature range: -30°C~+60°C

Nominal Weight:


3.3q


5.0mA

2. MAIN FEATURES

- ➤ Light Weight, High Voltage and High Energy Density
- Excellent Stable Discharge Characteristics and outstanding Temperature Characteristics
- Outstanding Temperature Characteristics
- Excellent Leakage Resistance and Excellent Long-term Reliability

3. ELECTRICAL CHARACTERISTICS

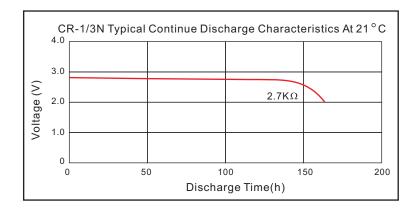



4. WARNING!

- > DO NOT recharge, short-circuit, disassemble, deform, heat or place the battery near a direct flame. Any of the above actions could cause it to ignite explode or become damaged.
- > Keep this battery out of the reach of children.
- ➤ When storing the battery or thro wing it away, be sure to cover it with tape.