
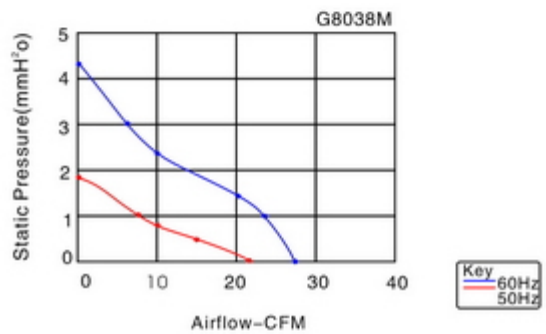


尺寸 Size:80mmx80mmx38mm  
风量 Airflow:36~48m<sup>3</sup>/hr  
21~28CFM

重量 Weight:310g  
噪音 Noise:26~33dBA  
风叶 Impeller: PBT Thermoplastic Black,UL94-VO  
外框 Frame:Aluminum Alloy  
端子 Terminals:0.5mm  
引线 Lead Wire: AWG#22 UL 1007(Optional)  
马达 Motor:Shaded Pole Induction Motor  
安规认证 Safety:UL > CUL > TUV > CE >   
温度范围 Operation Temperature:-10°C~+65°C

Model (型号)	Bearing System (轴承型式)	Voltage VAC (电压)	Freq. Hz (频率)	Current A (电流)	Power W (功率)	Speed RPM (转速)	Noise dBA (噪音)	Air Flow (风量)		Phase (相数)	Capacitor (电容)
								M3/hr	CFM		
G8038HA,S	Sleeve	100~125	50/60	0.14	14	2400/2900	28/33	39/48	23/28	1	/
G8038HA,S		200~240	50/60	0.07	14	2400/2900	28/33	39/48	23/28	1	/
G8038HA,B	Ball	100~125	50/60	0.14	14	2400/2900	28/33	39/48	23/28	1	/
G8038HA,B		200~240	50/60	0.07	14	2400/2900	28/33	39/48	23/28	1	/
G8038MA,S	Sleeve	100~125	50/60	0.13	13	2300/2700	26/31	36/44	21/26	1	/
G8038MA,S		200~240	50/60	0.06	13	2300/2700	26/31	36/44	21/26	1	/
G8038MA,B	Ball	100~125	50/60	0.13	13	2300/2700	26/31	36/44	21/26	1	/
G8038MA,B		200~240	50/60	0.06	13	2300/2700	26/31	36/44	21/26	1	/

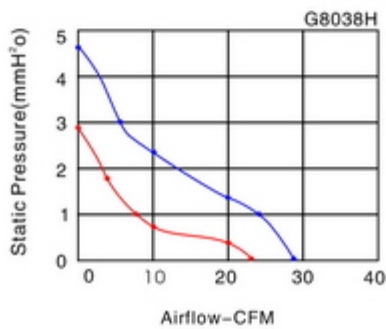

Key  
— 60Hz  
— 50Hz