



## HFE1600 Series

1600W 1U Hot Swap Front End Power Supplies

- 25.2W/in<sup>3</sup> power density
- Internal ORing MOSFET & Current Share
- Climate Savers Computing efficiency standards
- Up to 8000W in 1U rack
- Status monitoring signals
- PMBus option



### Key Market Segments & Applications

Power for Distributed Power Architecture  
Industrial Automation

### HFE1600 Features and Benefits

#### Features

- 1U high
- Internal ORing MOSFET & Current Share
- Status monitoring signals

#### Benefits

- Utilizes less system space
- Suitable for N+1 redundancy
- Easier system monitoring including PMBus

### Specifications

ITEMS	MODELS		
	(2)	VAC	
Input Voltage Range	(2)	VAC	85 - 265VAC, 47 - 63Hz. See model selector for power derating
Input Current (Max) 100/230VAC		A	12.4 / 8.1A
Inrush Current		A	<35A
Power Factor Correction		-	Meets EN61000-3-2, PF > 0.98 at full load
Temperature Coefficient		%/°C	<0.02%/°C
Overcurrent Protection		%	105 - 120%. Programmable by external voltage (0-5V)
Overvoltage Protection	(1)	%	110% (Tracking). Cycle AC to reset or utilize Remote On/Off
Overtemperature Protection	(1)	-	Shutdown with automatic restart. Warning signal provided
Hold up time		ms	>10ms, 100/230VAC Input, 80% loading
Leakage Current		mA	< 0.75 / 1.5mA 100/230VAC, 60Hz
Remote Sense Compensation		-	HFE1600-12: 0.25V/wire, HFE1600-24: 0.5V/wire, HFE1600-32: 0.75V/wire, HFE1600-48: 1V/wire
Indicators		-	AC OK: Green LED, DC OK / Fail: Green / Red LED
Remote On/Off		-	Unit ON: 0 - 0.6V or short, OFF: 2 - 15V or open circuit
Parallel Operation		-	Yes, single wire current share, 90% accuracy, up to 10 units
AC Fail Signal		-	Open Collector, ON when AC is within 85 - 270VAC
DC Good Signal		-	Open Collector, ON when output is above 85 to 95% of setpoint (tracking)
Remote Adjust	(1)	-	By either external 0 - 5V signal or 1k potentiometer
I <sup>2</sup> C Interface	(1)	-	Isolated from output, Add suffix /S, PMBus compatible
Auxiliary Output		-	11.2 - 12.5V, 0.5A, 240mV ripple and noise
Operating Temp. (-TB Rack)		°C	-10°C to +70°C, derate 2%/°C from 50°C to 60°C, 2.5%/°C from 60°C to 70°C
Operating Temp. (-IEC320 Rack)		°C	-10°C to +60°C, derate 2%/°C from 50°C to 60°C
Storage Temperature		°C	-30°C to +85°C
Humidity (Non condensing)		%RH	Operating: 10 - 90%RH, Storage: 10 - 95%RH
Cooling		-	Two variable speed internal fans, airflow exits across input/output connector
Withstand Voltage		-	I/P to O/P 3kVAC, I/P to Ground 2kVAC, O/P to Ground: HFE1600-12, -24V 500VAC, HFE1600-48 1.5kVAC
Isolation Resistance		Ω	>100MΩ at 25°C & 70%RH, Output to Ground 500VDC
Vibration (Basic transportation)		-	Meets IEC61068-2-64
Shock (Basic transportation)		-	Meets IEC61068-2-27
Safety Agency Certifications		-	UL60950-1, EN60950-1, CE Mark
Line Dip		-	Complies with SEMI F47 (200VAC line only)
Conducted and Radiated EMI		-	EN55022 & FCC part 15; Conducted class B, Radiated class A
Immunity		-	IEC61000-4-2 (lv 2,3), -3 (lv 2), -4 (lv2), -5 (lv3,4), -6 (lv2), -8 (lv 4), -11
Size (W x H x D)		mm	Power Supply: 85 x 41 x 300, Rack: 445 x 44 x 365
Weight		g	Power Supply: 1550g, Rack: 4800g
Warranty		yrs	3

(1) See installation manual for detailed specifications & test methods

(2) Derate output power linearly 1%/V from 100VAC to 85VAC input


Model Selector						
Model	Output Voltage	Adjust Range (1)	Max Current (Vin>170VAC)(2)	Max Power (Vin>170VAC)(2)	Max Current (100<Vin<170VAC)(2)	Max Power (100<Vin<170VAC)(2)
HFE1600-12	12V	9.6 - 13.2V	133A	1596W	100A	1200W
HFE1600-12/S	12V	9.6 - 13.2V	133A	1596W	100A	1200W
HFE1600-24	24V	19.2 - 29V	67A	1608W	50A	1200W
HFE1600-24/S	24V	19.2 - 29V	67A	1608W	50A	1200W
HFE1600-32	32V	25.6 - 38.4V	47A	1504W	37.5A	1200W
HFE1600-32/S	32V	25.6 - 38.4V	47A	1504W	37.5A	1200W
HFE1600-48	48V	38.4 - 58V	33A	1584W	25A	1200W
HFE1600-48/S	48V	38.4 - 58V	33A	1584W	25A	1200W


Model	Load Reg	Line Reg	Ripple & Noise	Efficiency (%) <sup>(3)</sup>	IPC
HFE1600-12	60mV	30mV	240mV	87 / 90%	-
HFE1600-12/S	60mV	30mV	240mV	87 / 90%	Yes
HFE1600-24	120mV	60mV	240mV	88 / 90%	-
HFE1600-24/S	120mV	60mV	240mV	88 / 90%	Yes
HFE1600-32	160mV	80mV	320mV	88 / 90%	-
HFE1600-32/S	160mV	80mV	320mV	88 / 90%	Yes
HFE1600-48	240mV	120mV	480mV	89 / 92%	-
HFE1600-48/S	240mV	120mV	480mV	89 / 92%	Yes

(3) At 75% load, 100 / 230VAC input


Rack Model Selector		
Model	Description	Maximum Rack Current
HFE1600-S1U	Five slot 19" rack, IEC320 input connectors (5)	266A per side (532A total)
HFE1600-S1U-TB	Five slot 19" rack, Terminal Block input connectors (5)	266A per side (532A total)
HFE1600/BP	One slot blanking panel, four provided with each rack	
HFE1600-D1U	Four slot (two isolated pairs), dual output 19" rack, IEC320 input connectors (4)	266A per side
HFE1600-D1U-TB	Four slot (two isolated pairs), dual output 19" rack, Terminal Block input connectors (4)	266A per side

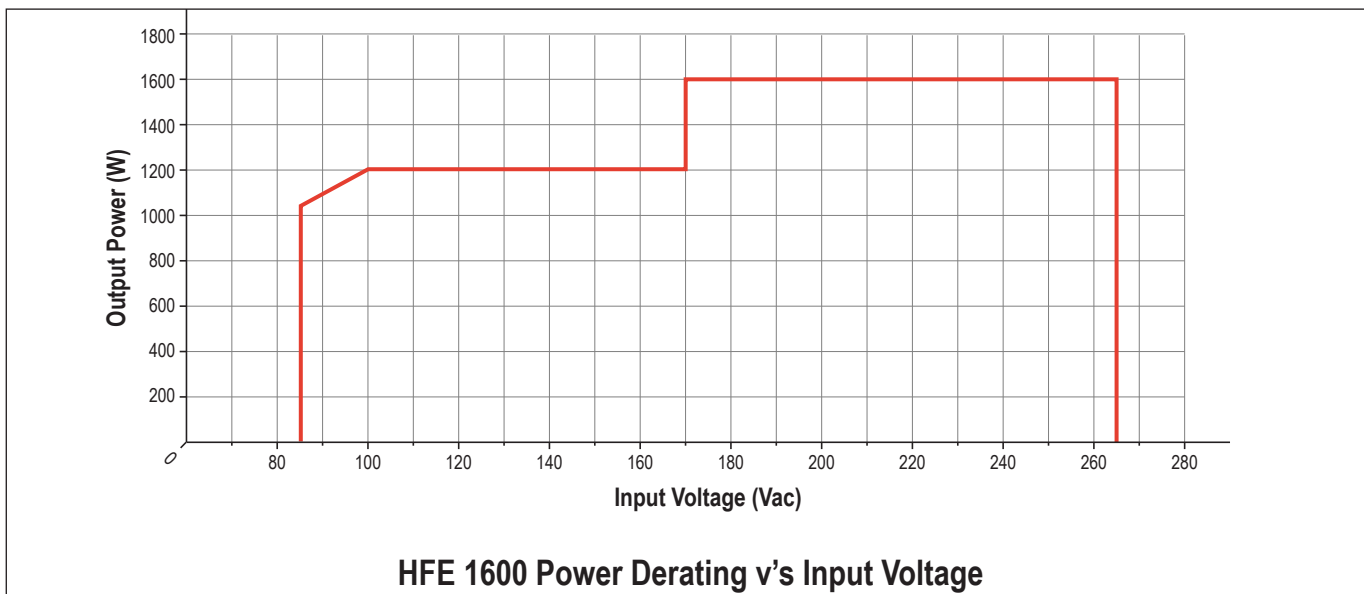

## Outline Drawing HFE1600 Series

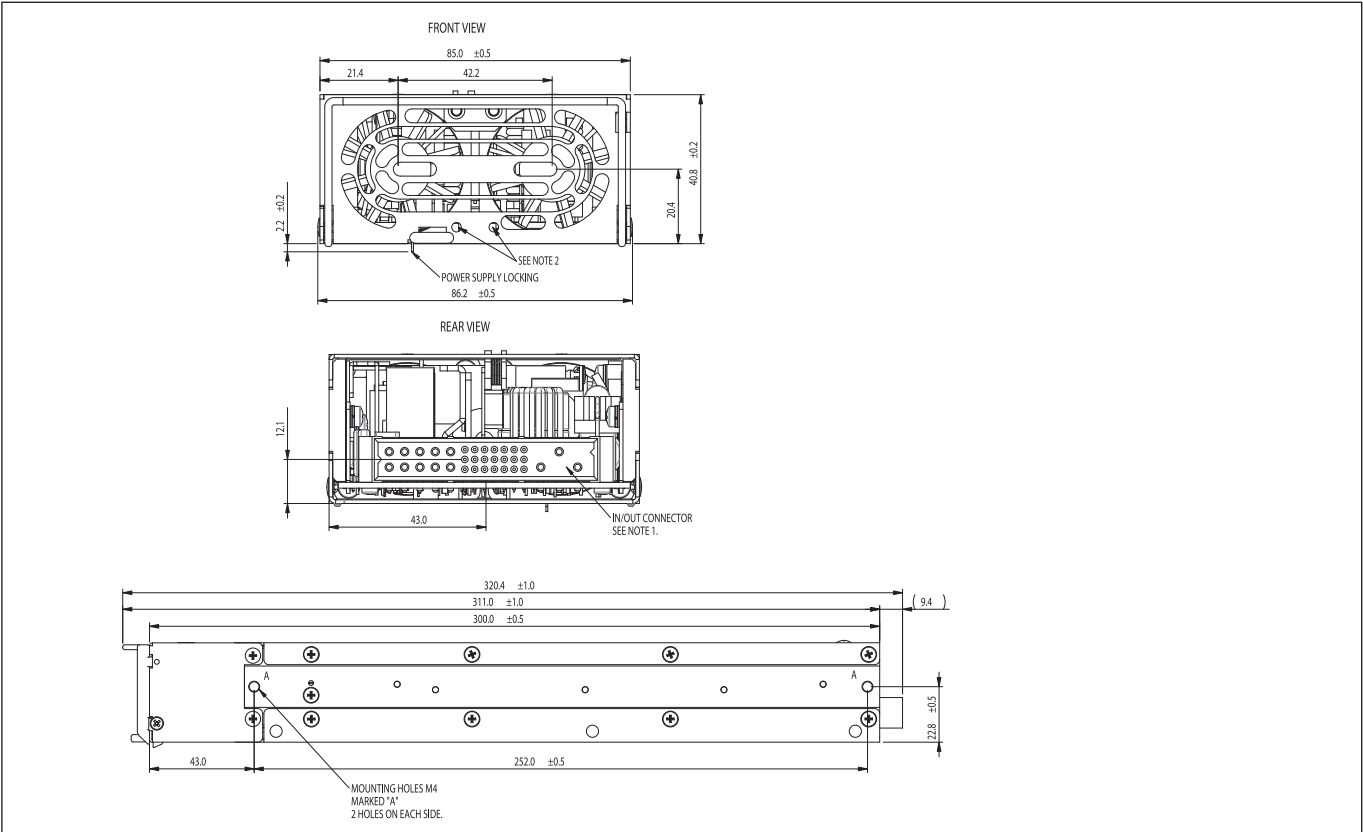

## Outline Drawing HFE1600S1U Series

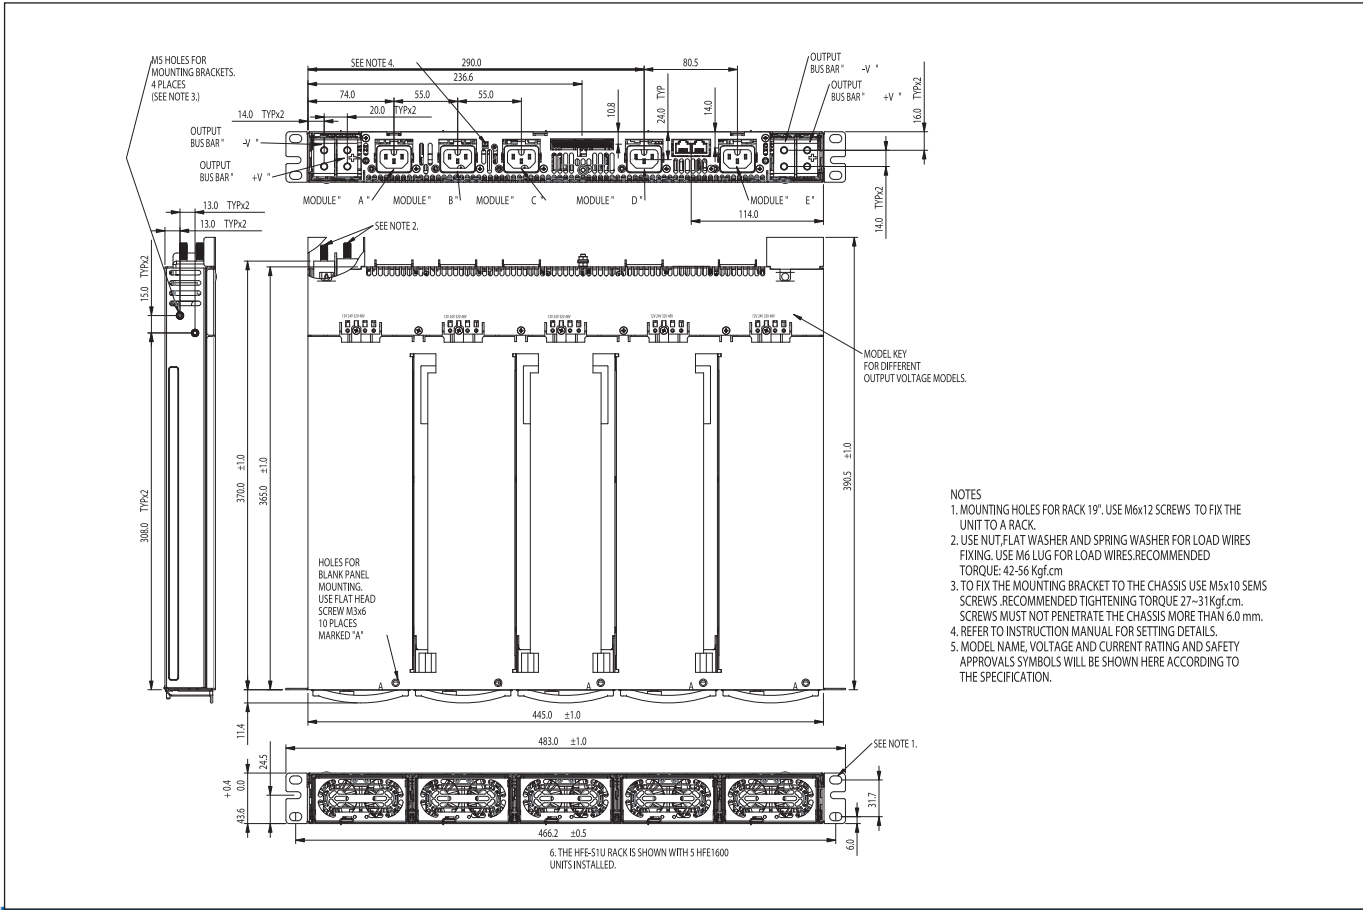



**TDK-Lambda France SAS**

ZAC des Delaches  
CS 41077  
9 rue Thuilliere  
91978 Villebon Courtaboeuf  
France  
Tel: +33 1 60 12 71 65  
Fax: +33 1 60 12 71 66  
france@fr.tdk-lambda.com  
www.fr.tdk-lambda.com



**Italy Sales Office**

Via dei Lavoratori 128/130  
20092 Cinisello Balsamo (MI)  
Italy  
Tel: +39 02 61 29 38 63  
Fax: +39 02 61 29 09 00  
info.italia@it.tdk-lambda.com  
www.it.tdk-lambda.com



**Netherlands**

info@tdk-lambda.nl  
www.tdk-lambda.nl



**TDK-Lambda Germany GmbH**

Karl-Bold-Strasse 40  
77855 Achern  
Germany  
Tel: +49 7841 666 0  
Fax: +49 7841 5000  
info.germany@de.tdk-lambda.com  
www.de.tdk-lambda.com



**Austria Sales Office**

Aredstrasse 22  
2544 Leobersdorf  
Austria  
Tel: +43 2256 655 84  
Fax: +43 2256 645 12  
info.germany@de.tdk-lambda.com  
www.de.tdk-lambda.com



**Scandinavia Sales Office**

Valdemarsgade 7  
4100 Ringsted  
Denmark  
Tel: +45 58 10 35 56  
Fax: +45 69 80 44 99  
info@de.tdk-lambda.com  
www.emea.tdk-lambda.com



**Switzerland Sales Office**

Bahnhofstrasse 50  
8305 Dietlikon  
Switzerland  
Tel: +41 44 850 53 53  
Fax: +41 44 850 53 53  
info@de.tdk-lambda.com  
www.de.tdk-lambda.com



**TDK-Lambda UK Ltd.**

Kingsley Avenue  
Ilfracombe  
Devon EX34 8ES  
United Kingdom  
Tel: +44 (0) 12 71 85 66 66  
Fax: +44 (0) 12 71 86 48 94  
powersolutions@uk.tdk-lambda.com  
www.uk.tdk-lambda.com



**TDK-Lambda Ltd.**

Kibbutz  
Givat Hashlosha 48800  
Israel  
Tel: +9 723 902 4333  
Fax: +9 723 902 4777  
info@tdk-lambda.co.il  
www.tdk-lambda.co.il



**Russia**

**Technical Support:**  
St Petersburg  
Tel: +7 (812) 6580463  
**Sales:**  
Moscow  
info@tdk-lambda.ru  
www.tdk-lambda.ru

Local Distribution



www.emea.tdk-lambda.com