
SMD 3528 Double-line **240PCS/M**







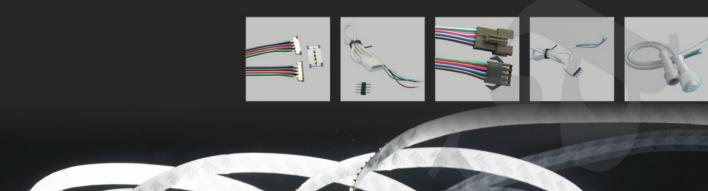

Features:

- 1. Available in single colors: red, green, blue, yellow, white, warm white, etc.
- 2.DC12V, 24V, 240leds/m, 19.2w/m, with brown, white and black background.
- 3. Cuttable every 6LEDs along the cutting marks, pack in reel,5m/reel in normal, different length is available.
- 4. With 3M tape in the back, very simple to install at anysurfaces.
- 5. No ultraviolet and infrared radiation, low heat-release, long lifetime for 50,000hs.
- 6.No dark space and with 120° view angle.
- 7.CE and RoHS are approved.








Unit:mm



Non-waterproof SMD 3528 Double-line 240PCS/M




Dimensions



Characteristics


Fait Number	LED Q ty	voitage(v)	Color	CCI(K)	Aligic	Max Fower	Size(IIIII)
HH-SWW240 F115W12-3528	1200PCS/5M	DC24V	Warm White	2500-3500	120°	95W	5000*15
HH-SW240 F115W12-3528	1200PCS/5M	DC24V	White	6000-12000	120°	95W	5000*15
Wiring diagram							

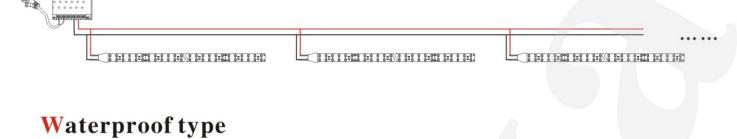

Small box size: L305 * W245 * H260mm

Package

Notes:







1. Please check the power supply before using, make sure the exact standards. 2. Please keep the total power of the driving LED strips less than 80% of the rated power from power supply.