



## HH-SW30F008Y12-5050



### Features:

1. Available in single colors: red, green, blue, yellow, white, warm white, etc.
2. DC12V, 24V, 30leds/m, 7.2w/m, with brown, white and black background.
3. Cuttable every 3LEDs along the cutting marks, pack in reel, 5m/reel in normal, different length is available.
4. With 3M tape in the back, very simple to install at any surfaces.
5. No ultraviolet and infrared radiation, low heat-release, long lifetime for 30,000hs.
6. No dark space and with 120° view angle.
7. CE and RoHS are approved.




**Application:** hotel, market, KTV, decorative lights for holiday, event, show, exhibition. DIY light for home using. Backlight or edge lighting for sign, etc.

### Waterproof type



IP65 (glue) IP67 (silicone tube) IP68 (PVC tube+glue) IP68 (half silicone tube+silicone glue)

### Dimensions

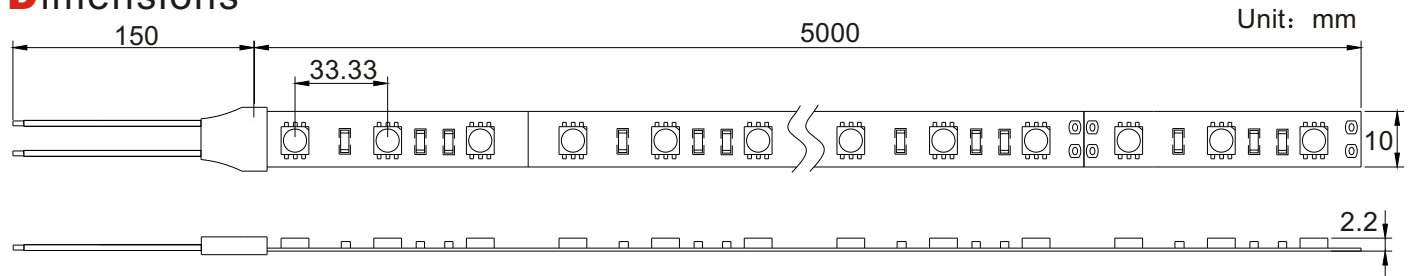

### Characteristics


Part Number	LEDType	LED Q'ty	Color	CCTRange λd(nm)/Tc(K)	Voltage(24)	Max Power	Lifetime	Size(mm)
HH-SWW30F010Y12-5050	SMD 5050	150pcs	Warm White	2500-3500	12	36W	50000	5000*10
HH-SW30F010Y12-5050		150pcs	White	6000-12000	12	36W	50000	5000*10
HH-SR30F010Y12-5050		150pcs	Red	620-630	12	36W	50000	5000*10
HH-SG30F0310Y12-5050		150pcs	Green	515-525	12	36W	50000	5000*10
HH-SB30F010Y12-5050		150pcs	Blue	460-470	12	36W	50000	5000*10
HH-SY30F010Y12-5050		150pcs	Yellow	585-595	12	36W	50000	5000*10
HH-SRGB30F010Y12-5050		150pcs	RGB			12	36W	50000





## HH-SW30F008Y12-5050


### Connection Diagram

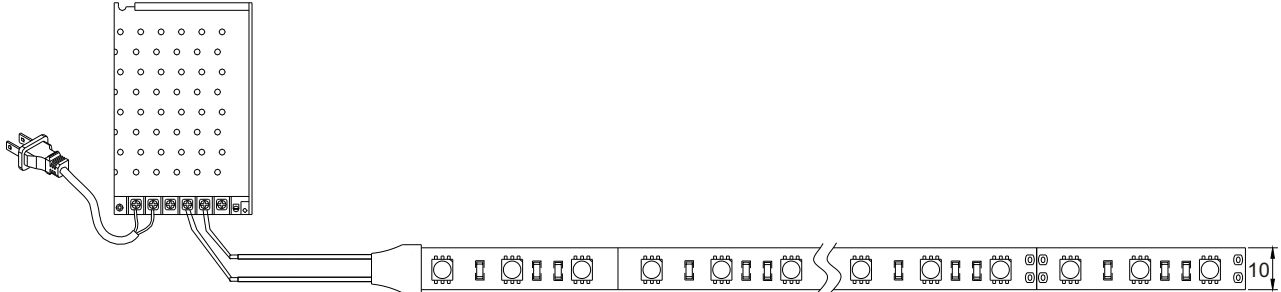

### Installation Guide



### Product Parts




### Package



H1: 5m/roll



H2: 100m/carton



H3: 400m/carton

### Notes:

1. Please check the power supply before using, make sure the exact standards.
2. Please keep the total power of the driving LED strips less than 80% of the rated power from power supply.

