

## HH-SW60F008Y12-3528



### Features:

1. Available in single colors: red, green, blue, yellow, white, warm white, etc.
2. DC12V, 24V, 60leds/m, 4.8w/m, with brown, white and black background.
3. Cuttable every 3LEDs along the cutting marks, pack in reel, 5m/reel in normal, different length is available.
4. With 3M tape in the back, very simple to install at any surfaces.
5. No ultraviolet and infrared radiation, low heat-release, long lifetime for 50,000hs.
6. No dark space and with 120° view angle.
7. CE and RoHS are approved.




**Application:** hotel, market, KTV, decorative lights for holiday, event, show, exhibition. DIY light for home using. Backlight or edge lighting for sign, etc.

### Waterproof type



IP65 (glue) IP67 (silicone tube) IP68 (PVC tube+glue) IP68 (half silicone tube+silicone glue)

### Dimensions

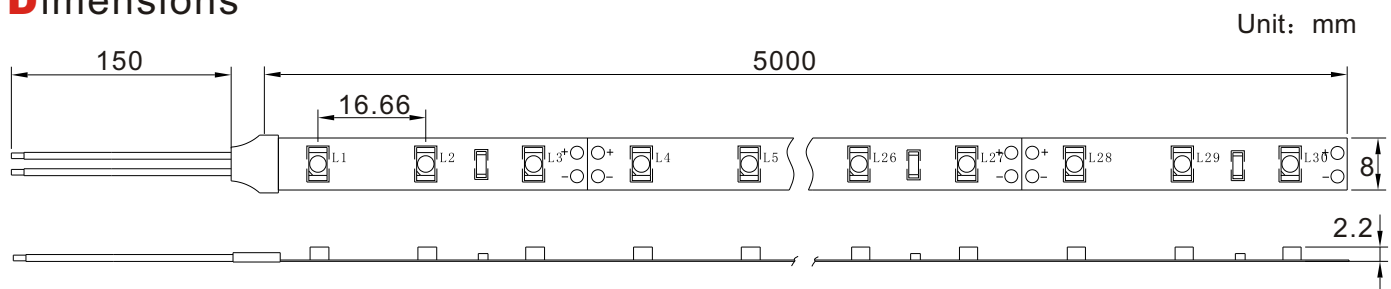


### Characteristics

Part Number	LED Type	LED Q'ty	CCT Range	λd(nm)/Tc(K)	Flux	Max Power	Lifetime	尺寸(mm)
HH-SWW60F008Y12-3528	TOP SMD 3528 LED	300pcs	Warm White	2500-3500		12V	30000	5000*8
HH-SW60F008Y12-3528		300pcs	Pure White	6000-7500		12V	30000	5000*8
HH-SR60F008Y12-3528		300pcs	Red	620-630	780	12V	30000	5000*8
HH-SG60F008Y12-3528		300pcs	Green	515-525	1300	12V	30000	5000*8
HH-SB60F008Y12-3528		300pcs	Blue	460-470	460	12V	30000	5000*8
HH-SY60F008Y12-3528		300pcs	Yellow	585-595	780	12V	30000	5000*8



# HH-SW60F008Y12-3528


## Connection Diagram

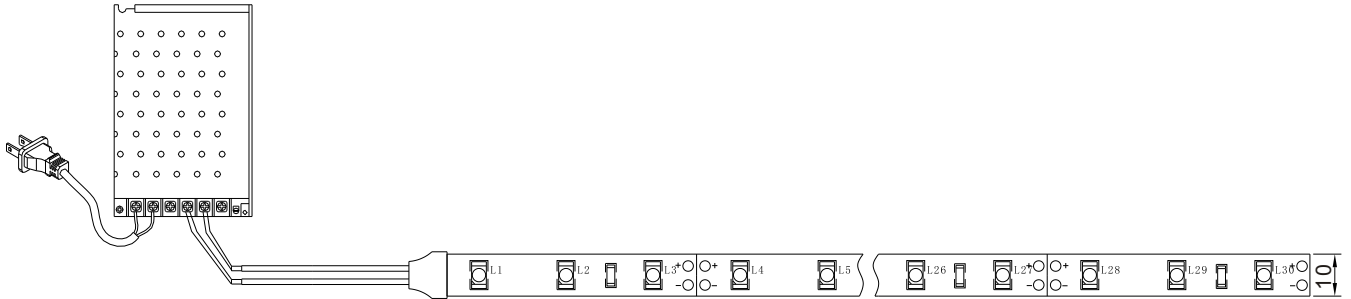

## Installation Guide



## Product Parts




## Package



H1: 5m/roll



H2: 100m/carton



H3: 400m/carton

## Notes:

1. Please check the power supply before using, make sure the exact standards.
2. Please keep the total power of the driving LED strips less than 80% of the rated power from power supply.

