




HH-SWW60F010Y12-5050

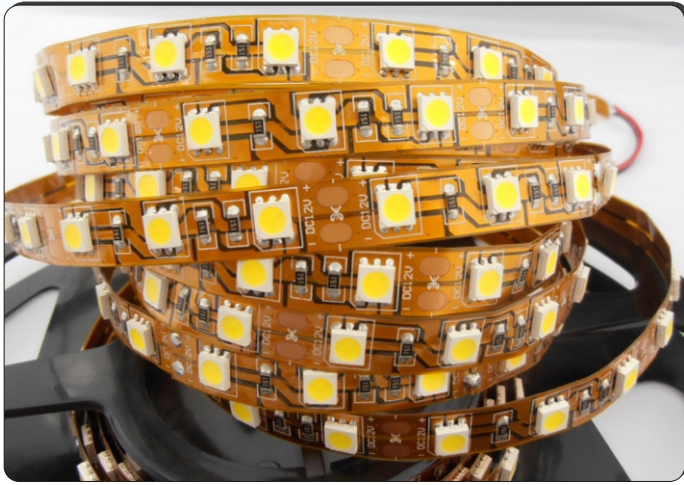

Features:

1. Available in single colors: red, green, blue, yellow, white, warm white, etc.
2. DC12V, 24V, 60leds/m, 14.4w/m, with brown, white and black background.
3. Cuttable every 3LEDs along the cutting marks, pack in reel, 5m/reel in normal, different length is available.
4. With 3M tape in the back, very simple to install at any surfaces.
5. No ultraviolet and infrared radiation, low heat-release, long lifetime for 30,000hs.
6. No dark space and with 120° view angle.
7. CE and RoHS are approved.




Application: Hotel, market, KTV, decorative lights for holiday, event, show, exhibition. DIY light for home using. Backlight or edge lighting for sign, etc.

Waterproof type



IP65 (glue) IP67 (silicone tube) IP68 (PVC tube+glue) IP68 (half silicone tube+ silicone glue)
单位: mm

Dimensions

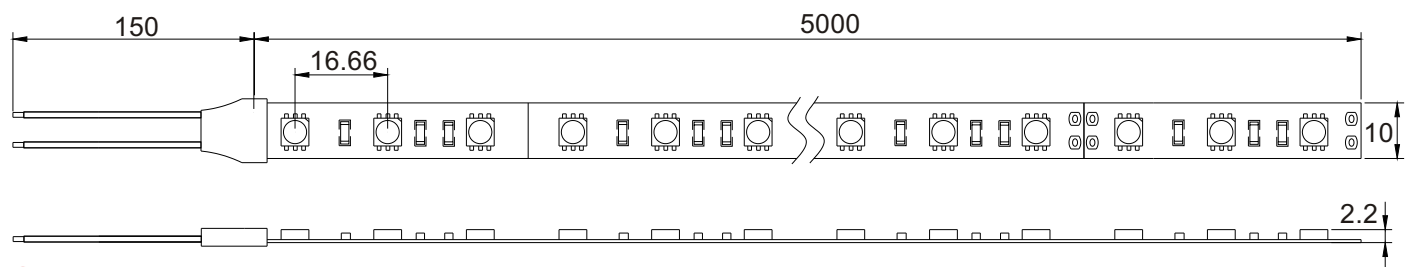

Characteristics


Part Number	LEDType	LED Q'ty	Color	CCTRange λd(nm)/Tc(K)	Voltage(12)	Max Power	Lifetime	Size(mm)	
HH-SWW60F010Y12-5050	SMD 5050	300pcs	Warm White	2500-3500	12	72W	50000	5000*10	
HH-SW60F010Y12-5050		300pcs	White	6000-12000	12	72W	50000	5000*10	
HH-SR60F010Y12-5050		300pcs	Red	620-630	12	72W	50000	5000*10	
HH-SG60F010Y12-5050		300pcs	Green	515-525	12	72W	50000	5000*10	
HH-SB60F010Y12-5050		300pcs	Blue	460-470	12	72W	50000	5000*10	
HH-SY60F010Y12-5050		300pcs	Yellow	585-595	12	72W	50000	5000*10	
HH-SRGB60F010Y12-5050		300pcs	RGB			12	72W	50000	5000*10






HH-SWW60F010Y12-5050

Connection Diagram

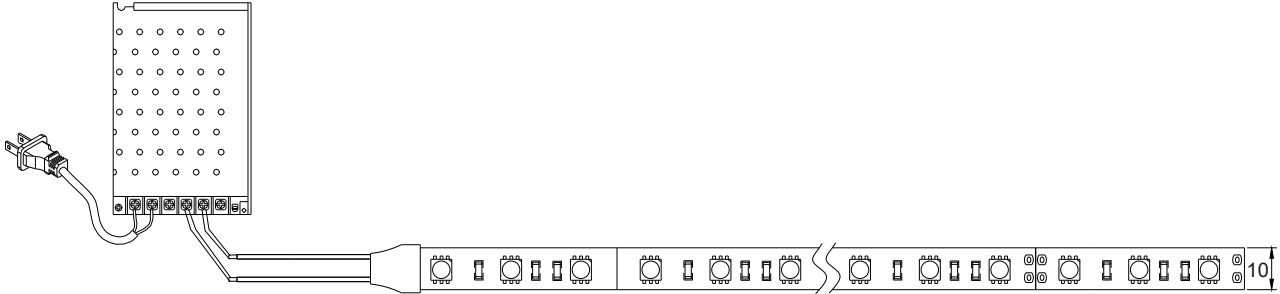

Installation Guide



Product Parts




Package



H1: 5m/roll



H2: 100m/carton



H3: 400m/carton

Notes:

1. Please check the power supply before using, make sure the exact standards.
2. Please keep the total power of the driving LED strips less than 80% of the rated power from power supply.

