

VISIBLE LIGHT PRODUCTS

(Super Green Light Emitting Diode)

ESD PRODUCTS ! CLASS I


REV:B
DATE:2005/4/25

DEVICE NO:HSFb-43AG

LENS COLOR:

<input type="checkbox"/>	colored diffusion	<input type="checkbox"/>	colored transparent	<input type="checkbox"/>	white diffusion	<input checked="" type="checkbox"/>		water clear
--------------------------	-------------------	--------------------------	---------------------	--------------------------	-----------------	-------------------------------------	--	-------------

PACKAGE DIMENSIONS:

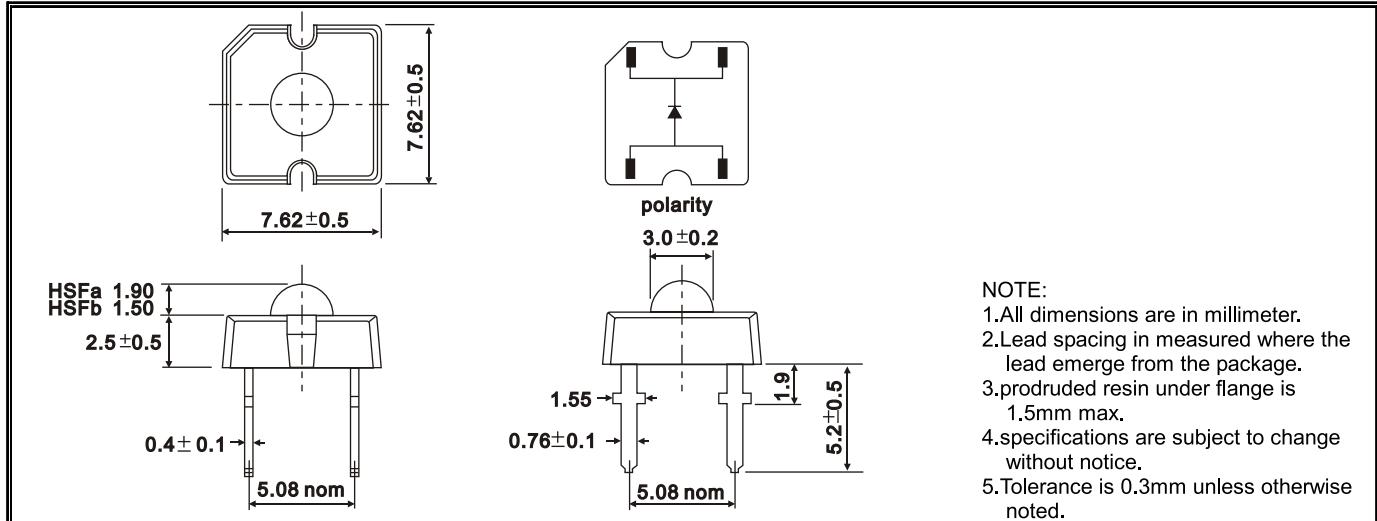

ABSOLUTE MAXIMUM RATINGS:

Material:InGaN/GaN

TA=25°C

PARAMETER	SYMBOL	MAX. RATING	UNIT
Power Dissipation	Pd	120	mW
Continuous Forward Current	IF	30	mA
Peak Forward Current *1	IFM	100	mA
Reverse Voltage	VR	4	V
LED Junction Temperature	Tj	100	°C
Operating Temperature	Topr	-20 ~ +80	°C
Storage Temperature	Tstg	-30 ~ +100	°C
Lead Soldering Temperature (1.6mm from case Bottom 260 °C for 5 seconds)			

ELECTRIC-OPTICAL CHARACTERISTICS:

TA=25°C

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
View Angle of Half Power	2θ1/2	IF=20mA		65		Degree
Forward Voltage	VF	IF=20mA		3.6	4.0	V
Reverse Current	IR	VR=4V			60	uA
Total Flux	IV	IF=20mA	250	500		mlm
Peak Emission Wavelength	λp	IF=20mA		525		nm
Dominate Wave Length *3	λd(HUE)	IF=20mA		530		nm
Spectrum Width of Half Valve	Δλ	IF=20mA		45		nm

*1.Duty Ratio=1/10,Pulse Width=0.1ms.

*2.Tolerance:30%, measuring equipment :1.EXELTRON 2001. 2.S370 made by U.D.T.

*3.The dominate wavelength is derived from the CIE Chromaticity Diagram and represents the color of the device.

HUEY JANN ELECTRONICS INDUSTRY CO., LTD.