



# LF1290

## Outline


Common mode chokes for effective AC line noise prevention.

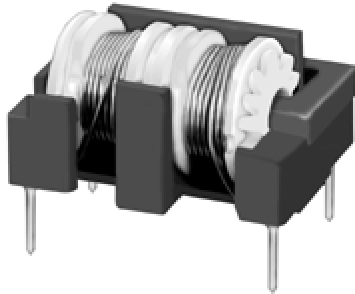


## Schematics

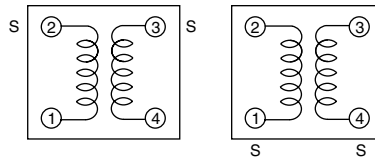

## Dimensions (mm)

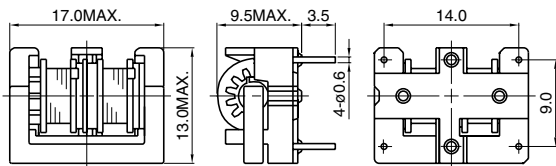

## Impedance Characteristics

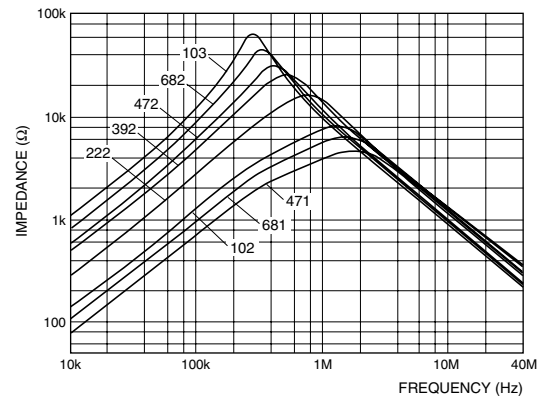

## Features

- Small size and large inductance type
- Excellent attenuation characteristics in low frequency

## Application

- Noise prevention for TVs, VCRs, AVs, OA devices

## Specifications

Type	Inductance (1-2)(4-3)	Inductance Balance	D.C.R(1-2)(4-3) @ 20°C	Rated current (50/60Hz)
LF1290-471	Min.0.47mH	Max.50μH	Max.0.15Ω	1.10A
LF1290-681	Min.0.47mH	Max.50μH	Max.0.25Ω	0.85A
LF1290-102	Min.1.00mH	Max.150μH	Max.0.35Ω	0.65A
LF1290-222	Min.2.20mH	Max.150μH	Max.0.70Ω	0.45A
LF1290-392	Min.3.90mH	Max.200μH	Max.1.20Ω	0.36A
LF1290-472	Min.4.70mH	Max.300μH	Max.1.60Ω	0.34A
LF1290-682	Min.6.80mH	Max.400μH	Max.2.50Ω	0.25A
LF1290-103	Min.10.0mH	Max.550μH	Max.4.00Ω	0.20A

### Sales Contact

**North America**  
1701 Golf Road, Tower 3  
Suite 400, Rolling  
Meadows, IL 60008, USA  
Tel: (1) 847 545-6700  
Fax: (1) 847 545-6720

**Japan**  
Nihonbashi- ingyocho  
2-Chome, Chuo-ku,  
Tokyo, Japan  
Tel: (81) 03 3667-3301  
Fax: (81) 03 3667-3456

**Hong Kong**  
14/F, Eastern Centre,  
1065 King's Road, Quarry  
Road, Hong Kong  
Tel: (852) 2880-6688  
Fax: (852) 2880-9596

**Taiwan**  
No. 171, Futech Street,  
Hsin-I, Taipei, Taiwan,  
ROC  
Tel: (886) 2 2726-2177  
Fax: (886) 2 2728-2726

**Singapore**  
996 Bendemeer  
Road #04-05 to 06  
Singapore 339944  
Tel: (65) 2963-388  
Fax: (65) 2963-390

**Europe**  
Chaussee de Tervuren113A,  
1160 Brussels  
Belgium  
Email:  
europe.sales@hk.sumida.com