


SPECIFICATION

CUSTOMER: *ecom*


DATE: *15th. SEP. 2001*

PART NO.	SUMIDA TYPE <i>P-10R</i>	SAMPLE NO. <i>0136-T025</i>
----------	--------------------------	-----------------------------

1. DIMENSION (UNIT mm)

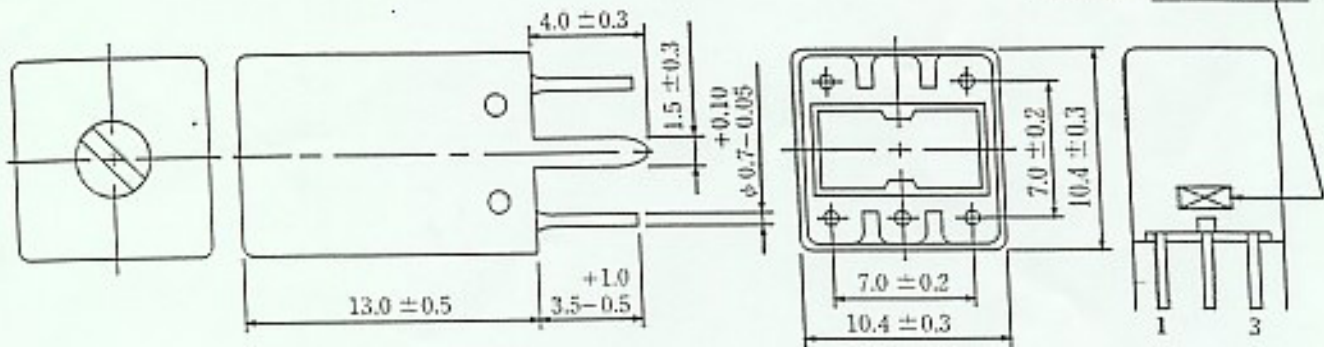

2. CONNECTION (BOTTOM)



3. TURNS, WIRE AND CORE

PIN No.	<i>1-3</i>	<i>4-6</i>	
TURNS	<i>71 T</i>	<i>355 T</i>	<i>T</i>
WIRE	<i>0.05 UEW</i>		
D. CORE	<i>K32 OR EQUIVALENT</i>		
C. CORE	<i>L31 OR EQUIVALENT</i>		

TYPE CHANGED FROM:

4. ELECTRICAL CHARACTERISTICS

	(<i>4-6</i>) BETWEEN	MEASURING FREQUENCY
1. <i>INDUCTANCE</i>	<i>4.5mH ± 8 %</i> CAN BE ADJUSTED WITHIN	<i>252 kHz</i>
2. UNLOADED Q	<i>MIN. 90</i>	<i>252 kHz</i>
3. CAPACITY	_____	_____
EXT. STRAY CAPACITY pF BETWEEN (-) AT MEASURING:		

5. NOTE

REVISIONS

①	
②	

CHK	CHK	DRG
<i>Chen</i>	<i>Zhao</i>	
<i>Wei Ming</i>	<i>Xiao Jun</i>	<i>Qinnianli</i>