

# Features

## Unregulated Converters

- Low Cost 1W Converter
- Industry Standard Pinout
- SIP4 Package
- 1kVDC Isolation
- Efficiency up to 80%
- Wide Operating Temperature Range -40°C to +85°C
- UL-60950-1 Certified

## ROE

**1 Watt**  
**SIP4**  
**Single Output**



### Description


The ROE DC/DC converters are typically used in general purpose power isolation and voltage matching applications, and feature a full industrial operating temperature range of -40°C to +85°C without derating.

### Selection Guide

Part Number	Input Voltage (VDC)	Output Voltage (VDC)	Output Current (mA)	Efficiency typ. (%)	max. Capacitive Load <sup>(1)</sup> (µF)
ROE-3.305S	3.3	5	200	79	470
ROE-0505S	5	5	200	79	470
ROE-0512S	5	12	84	80	220
ROE-0515S	5	15	66	80	220
ROE-1205S	12	5	200	80	470
ROE-1505S	15	5	200	79	470
ROE-2405S	24	5	200	80	470

**Notes:**

Note1: Max. capacitive load is tested at nominal input voltage and full load.




**RAI** US  
E358085

### Specifications (measured at TA= 25°C, nominal input voltage, full load and after warm up)

BASIC CHARACTERISTICS				
Parameter	Condition	Min.	Typ.	Max.
Input Voltage Range				±10%
Operating Frequency Range	Vin nominal	50kHz	80kHz	105kHz
Output Ripple and Noise	20MHz bandwidth		50mVp-p	100mVp-p

#### Efficiency vs. Load

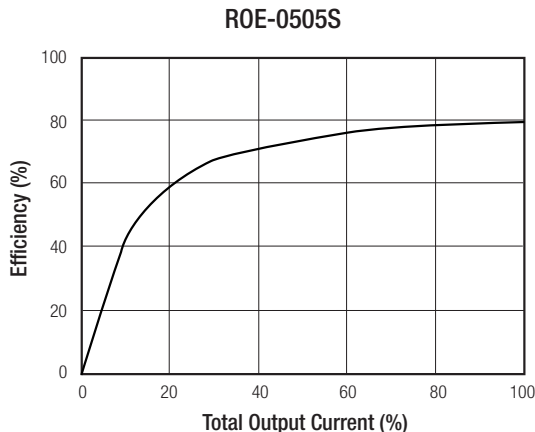


UL-60950-1 Certified

Specifications (measured at  $T_A = 25^\circ\text{C}$ , nominal input voltage, full load and after warm up unless otherwise specified)

REGULATIONS		
Parameter	Condition	Values
Output Voltage Accuracy	100% load, $V_{in}$ nominal	$\pm 5\%$ max.
Line Voltage Regulation	low line to high line, full load	$\pm 1.2\%$ typ. / $1\% V_{in}$
Load Voltage Regulation	20% to 100% load, $5V_{out}$	15% max.
	20% to 100% load, $12V_{out}$ and $15V_{out}$	10% max.


**Tolerance Envelope**

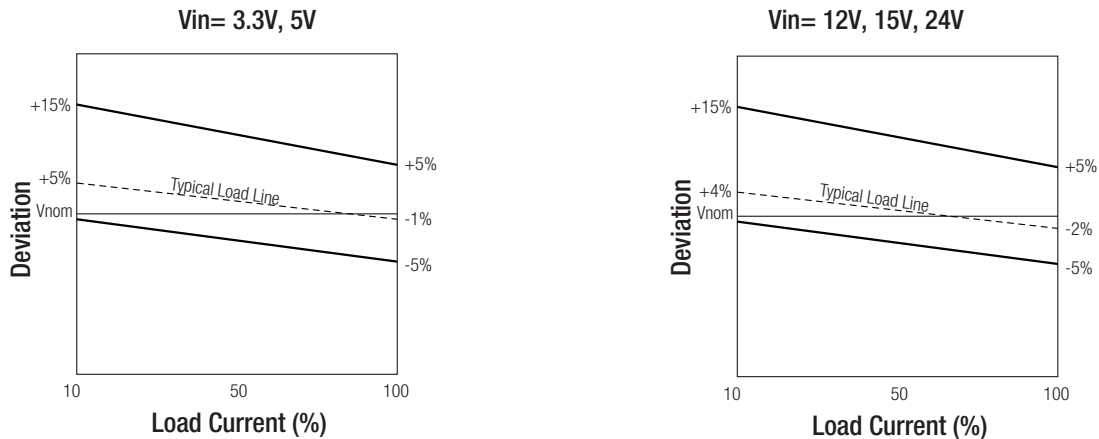

PROTECTIONS		
Parameter	Condition	Value
Isolation Voltage	I/P to O/P	1kVDC / 1 second
Isolation Capacitance		75pF max.
Isolation Resistance		1G $\Omega$ min.

ENVIRONMENTAL		
Parameter	Condition	Value
Operating Temperature Range	free air convection (see graph)	$-40^\circ\text{C}$ to $+85^\circ\text{C}$
Operating Humidity	non-condensing	95% RH max.
Vibration		MIL-STD-202G
MTBF ( $+25^\circ\text{C}$ ) ( $+85^\circ\text{C}$ )	according to MIL-HDBK-217F, full load	$22380 \times 10^3$ hours
		$9300 \times 10^3$ hours

**Derating Graph**

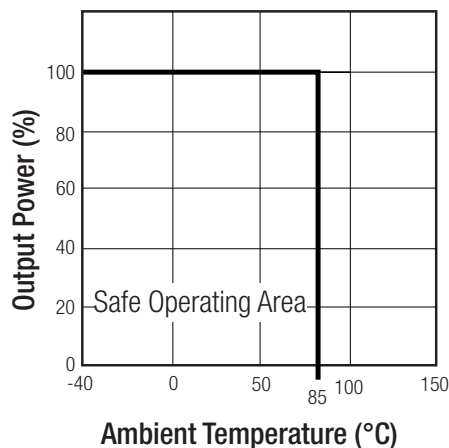


Specifications (measured at  $T_A = 25^\circ\text{C}$ , nominal input voltage, full load and after warm up unless otherwise specified)

### SAFETY AND CERTIFICATIONS

Certificate Type	Report / File Number	Standard
UL General Safety	E358085-A4	UL-60950-1, 2nd Edition
CAN/CSA General Safety	E358085-A4	C22.2 No. 60601-1:08

EMI Compliance	Condition	Standard / Criterion
EMC Conducted and Radiated	no external filter necessary only with external filter (see suggestions)	EN55022, Class A EN55022, Class B

### EMC Filtering - Suggestions for Class B

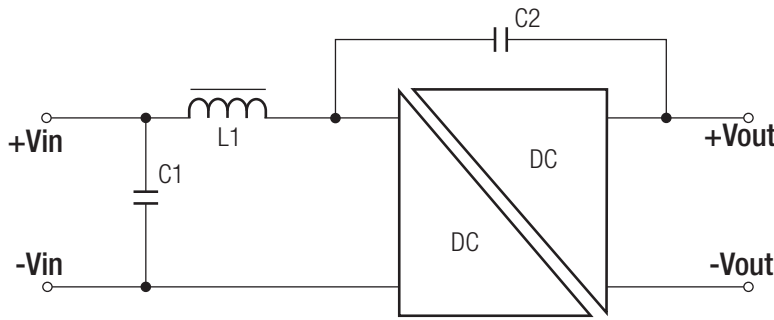

### ROE Series


C1	C2	L1	Vin
22 $\mu\text{F}$	470pF/4kVDC	3.3 $\mu\text{H}$	3.3V
10 $\mu\text{F}$	470pF/4kVDC	4.7 $\mu\text{H}$	5V
4.7 $\mu\text{F}$	470pF/4kVDC	22 $\mu\text{H}$	12V
4.7 $\mu\text{F}$	470pF/4kVDC	22 $\mu\text{H}$	15V
22 $\mu\text{F}$	470pF/4kVDC	47 $\mu\text{H}$	24V

C1 = MLCC  
L1 = SMD Inductor

### DIMENSION and PHYSICAL CHARACTERISTICS

Parameter	Type	Value
Case Material		non-conductive black plastic (UL94V-0)
Potting Material		Epoxy (UL94V-0)
Package Dimension (LxWxH)		11.5 x 6.0 x 10.0mm
Package Weight		1.4g

### Dimension Drawing (mm)

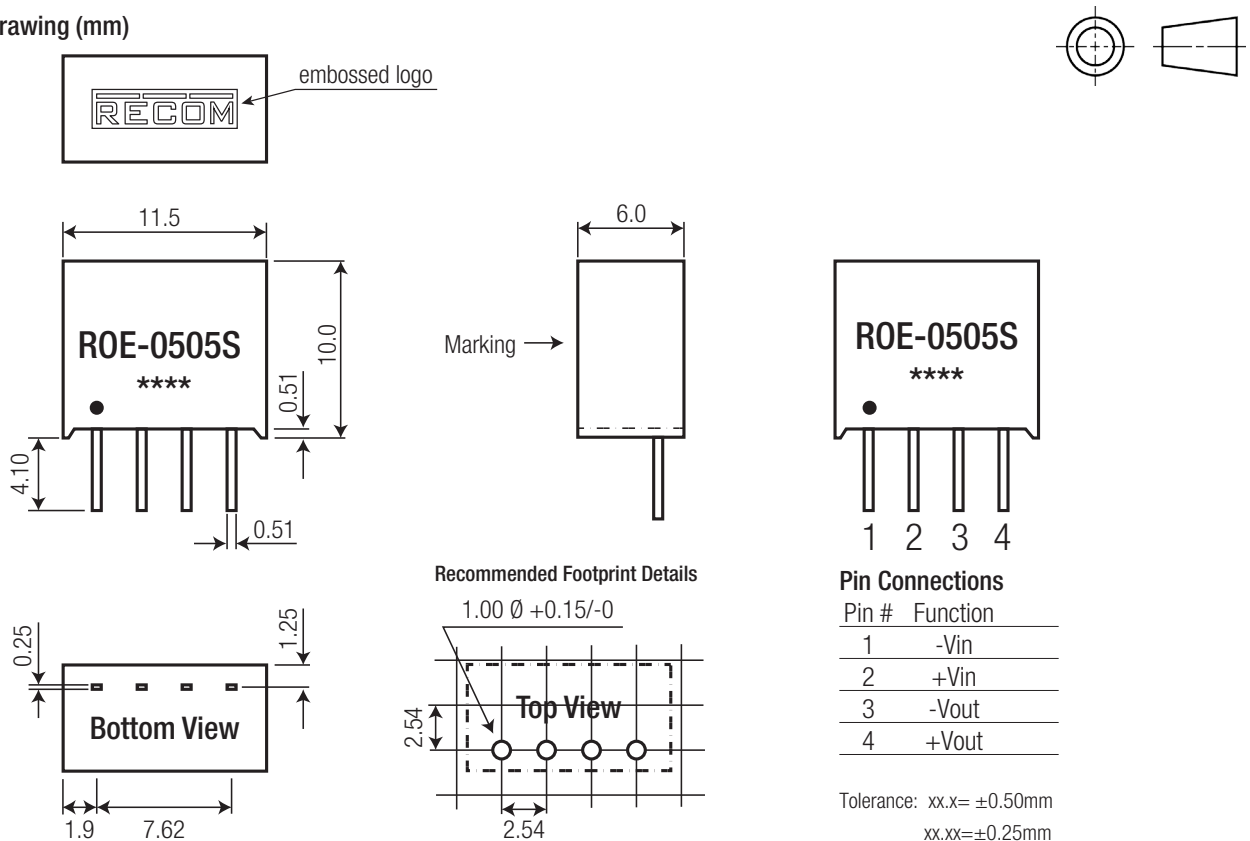


Specifications (measured at  $T_A = 25^\circ\text{C}$ , nominal input voltage, full load and after warm-up)

**PACKAGING INFORMATION**

Parameter	Type	Value
Packaging Dimension (LxWxH)	Tube	520 x 16 x 9mm
Packaging Quantity		42 pcs
Storage Temperature Range		-55°C to +125°C

**Tube Dimension Drawing (mm)**

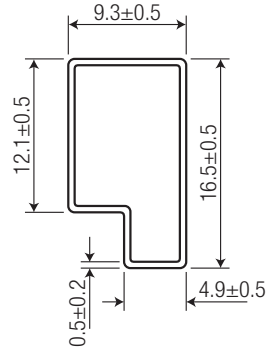

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[RECOM:](#)

[ROE-0505S](#) [ROE-3.305S](#) [ROE-0512S](#) [ROE-0515S](#) [ROE-1205S](#) [ROE-1505S](#) [ROE-2405S](#)