




SPECIFICATION CONTROL DRAWING Crystal Resonator

FREQUENCY

16.000000MHz

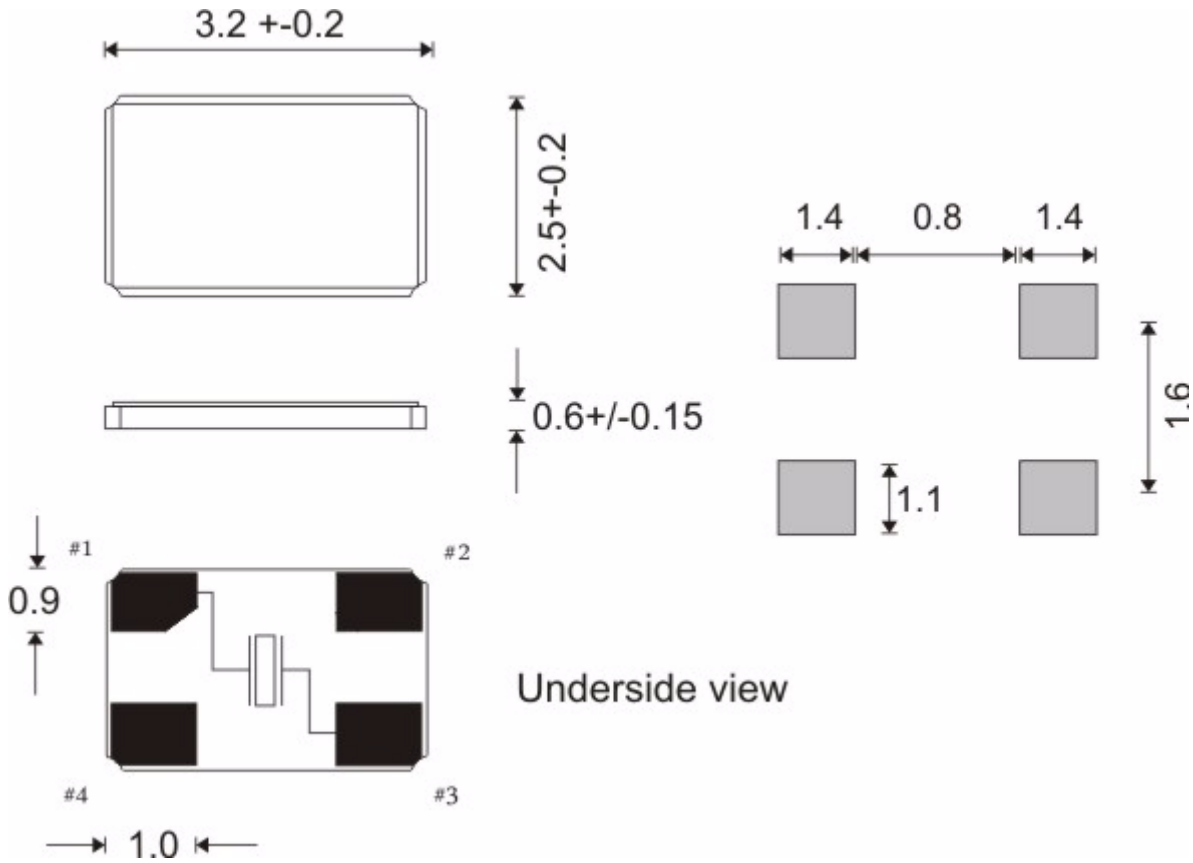

Holder Style	3X25X06 4-Pad
Mode	Fundamental
Adjustment Tolerance	± 10 PPM at 25°C
Temperature Stability	± 20 PPM
Operating Temp. Range	-40°C to +85°C
Load Capacitance	9 pF
ESR	60 Ohm
Drive Level	0.1 mW
Static Capacitance (C0)	Typ 1.1 pF
Ageing	1ppm/year
Pulling	12.5ppm/pF \pm 10% (@CL9pF)
Marking	AEL16

Amdt Date	Change Note	AEL Code
		X16M000000S105
		Issue Ref A