

### Features

- Wide 2 : 1 Input Range
- High Efficiency up to 89%
- Extended Operating Temperature Range  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$
- Indefinite Short-Circuit Protection
- I/O-Isolation 1500 VDC
- Remote On/Off
- Input Filter meets EN 55022, Class A and FCC, Level A without external Components
- Industry Standard Pinout
- Shielded Metal Case with insulated Baseplate
- 3 Year Product Warranty



The TEN 20 series of DC/DC converters, comprising 18 different models, has been designed for a wide range of applications including communications, industrial systems and battery powered equipments. Full SMD-design with use of ceramic chip capacitors guarantees a high reliability and a long lifetime. Other features of this converters are internal filter to meet EN 55022, class A and FCC, level A and an extended temperature range of  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ .

### Models

Ordercode	Input voltage range	Output voltage	Output current max.	Efficiency typ.
TEN 20-1210	9 – 18 VDC	3,3 VDC	4'000 mA	81 %
TEN 20-1211		5 VDC	4'000 mA	84 %
TEN 20-1212		12 VDC	1'670 mA	88 %
TEN 20-1213		15 VDC	1'340 mA	88 %
TEN 20-1222		$\pm 12$ VDC	$\pm 835$ mA	88 %
TEN 20-1223		$\pm 15$ VDC	$\pm 670$ mA	88 %
TEN 20-2410		18 – 36 VDC	3,3 VDC	4'000 mA
TEN 20-2411	5 VDC		4'000 mA	85 %
TEN 20-2412	12 VDC		1'670 mA	89 %
TEN 20-2413	15 VDC		1'340 mA	89 %
TEN 20-2422	$\pm 12$ VDC		$\pm 835$ mA	89 %
TEN 20-2423	$\pm 15$ VDC		$\pm 670$ mA	89 %
TEN 20-4810	36 – 75 VDC		3,3 VDC	4'000 mA
TEN 20-4811		5 VDC	4'000 mA	85 %
TEN 20-4812		12 VDC	1'670 mA	89 %
TEN 20-4813		15 VDC	1'340 mA	89 %
TEN 20-4822		$\pm 12$ VDC	$\pm 835$ mA	89 %
TEN 20-4823		$\pm 15$ VDC	$\pm 670$ mA	89 %

### Input Specifications

Input current no load/full load	12 Vin;	3.3 Vout models:	30 mA typ./1360 mA typ.
	12 Vin;	5 Vout models:	30 mA typ./1985 mA typ.
	12 Vin;	other output models:	30 mA typ./1895 mA typ.
	24 Vin;	3.3 Vout models:	17 mA typ./ 670 mA typ.
	24 Vin;	5 Vout models:	17 mA typ./ 980 mA typ.
	24 Vin;	other output models:	17 mA typ./ 935 mA typ.
	48 Vin;	3.3 Vout models:	10 mA typ./ 335 mA typ.
Surge voltage (100 msec. max.)	12 Vin models:	25 V max.	
	24 Vin models:	50 V max..	
	48 Vin models:	100 V max.	
Conducted noise (input)	EN 55022 Class A and FCC part 15, level A		

### Output Specifications

Voltage set accuracy	± 1 % max.		
Regulation	– Input variation Vin min. to Vin max.		0.3 % max.
	– Load variation 10 – 100 %		0.5 % max.
			1.0 % max. for 3.3VDC output models
Ripple and noise (20 MHz Bandwidth)	80 mVpk-pk max		
Temperature coefficient	± 0.02 % /K		
Output current limitation	110-160% of I out max., constant current		
Short circuit protection	indefinite, automatic recovery		
Minimum load	10% of rated max current (operation at lower load condition is safe but output ripple will increase)		
Capacitive load	3.3/5 Vout models:		6'800 µF max.
	12 /15 Vout models:		680 µF max.
	±12/ ±15 Vout models:		270 µF max.

### General Specifications

Temperature ranges	– Operating	– 40 °C ... + 85 °C
	– Case temperature	+ 100 °C max.
	– Storage	– 55 °C ... + 125 °C
Derating		3.5%/K above 70°C
	5 V Models	4.0%/K above 60 °C
Humidity (non condensing)	95 % rel H max.	
Reliability, calculated MTBF (MIL-HDBK-217 E)	>1Mio. h @ + 25 °C	
Isolation voltage	– Input/Output	1'500 VDC
Isolation capacity	– Input/Output	1'200 pF typ
Isolation resistance	– Input/Output (500 VDC)	> 1'000 MOhm
Switching frequency (fixed)	330 kHz typ. (Pulse width modulation PWM)	

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.


**General Specifications**

Remote ON/OFF	ON: OFF: OFF standby input current: Control common:	2.5 ... 100 VDC or open circuit. -1 ... 1.0 VDC or short circuit pin 2 and pin 6 5 mA max. referenced to negativ input
Safety standards		UL 60950, EN 60950, IEC 60950 Compliance up to 60 VDC input voltage (SELV limit)
Safety approvals		CSA

**Physical Specifications**

Case material	Copper, Nickel plated
Baseplate	non conductive FR4
Potting material	Silicon rubber TSE (UL 94V-0 rated)
Weight	30g (1.05oz)
Soldering temperature	max. 260 °C / 10 sec.

**Outline Dimensions mm (inches)**

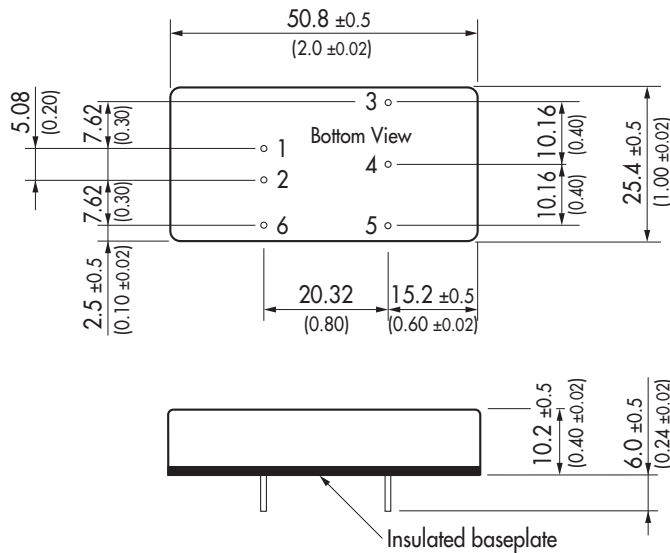

Pin-Out		
Pin	Single	Dual
1	+Vin (Vcc)	+Vin (Vcc)
2	-Vin (GND)	-Vin (GND)
3	+Vout	+Vout
4	No pin	Common
5	-Vout	-Vout
6	Remote on/off	Remote on/off

Pin diameter  $\varnothing 1.0 \pm 0.05$  (0.039 ± 0.002)

Dimensions in mm (Inch), Tolerance  $\pm 0.25$  ( 0.02)

Specifications can be changed any time without notice