

### Features

- Wide 2 : 1 Input Range
- Highest Power Density
- Operating Temp. Range  
- 25°C to +71°C
- Indefinite Short-Circuit Protection
- I/O-Isolation 1600 VDC
- Remote on/off
- Input Filter meets EN 55022, Class A  
and FCC, Level A
- Industry Standard Pinout
- Shielded Metal Case with  
insulated Baseplate
- 2 Year Product Warranty



The TES 20 converter series is intended for all applications where PCB's are assembled on an automated SMD production line. The light weight DIL-package allows easy handling by pick and place machines. High efficiency allows an operating temperature range of -40°C to +71°C without derating. I/O-isolation of 1'600 VDC together with conducted noise compliance to EN 55022-A and FCC, level A makes these converters ideal for a wide range of applications in communications, mobile battery powered equipments and industrial systems.

### Models

Ordercode	Input voltage range	Output voltage	Output current max.	Efficiency typ.
TES 20-4809	36 – 75 VDC	2.0VDC	4'000 mA	81 %
TES 20-4810		3.3VDC	4'000 mA	84 %
TES 20-4811		5.0VDC	4'000 mA	87 %
TES 20-4812		12.0VDC	1'670 mA	87 %
TES 20-4813		15.0VDC	1'330 mA	87 %

### Input Specifications

Input current no load	48 Vin;	35 mA typ.
Input current full load	48 Vin; 2.0 Vout models: 48 Vin; 3.3 Vout models: 48 Vin; other models:	205 mA typ. 330 mA typ. 480 mA typ.
Surge voltage (100ms max.)		100 V max.
Conducted noise (input)	3.3µF..100µF capacitor on the input (low ESR type or MLCC for SMD)	EN 55022 Class A and FCC part 15, level A

### Output Specifications

Voltage set accuracy		± 1 % max.
Regulation	– Input variation Vin min. to Vin max. – Load variation 10 – 100 %	0.5 % max. 1.0 % max.
Ripple and noise (20 MHz Bandwidth)	2.0Vout, 3.3Vout: 5Vout, 12Vout, 15Vout:	50 mVpk-pk max. (with C out= 100nF/50V) 75 mVpk-pk max (with C out= 100nF/50V)
Temperature coefficient		± 0.02 % /K
Output current limitation		120% to 140% of Iout, foldback
Short circuit protection		indefinite, automatic recovery
Capacitive load	2.0 Vout models: 3.3 Vout models: 5 Vout models: 12 Vout models: 15 Vout models:	1'500 µF max. 1'500 µF max. 1'500 µF max. 330 µF max. 330 µF max.

### General Specifications


Temperature ranges	– Operating – Case temperature – Storage	– 40°C ... + 71°C (–40...–25°C need Iout min.10%) + 100 °C max. – 55 °C ... + 125 °C
Derating		3.5%/K above 71°C
Humidity (non condensing)		95 % rel H max.
Reliability, calculated MTBF (MIL-HDBK-217 F)		340'000 h @ + 25 °C
Isolation voltage	– Input/Output	1'600 VDC
Isolation capacity	– Input/Output	500 pF max.
Isolation resistance	– Input/Output (500 VDC)	> 1'000 MOhm
Switching frequency (fixed)		300 kHz typ. (Pulse width modulation PWM)
Remote ON/OFF	ON: OFF: OFF stand by current:	3.5 ... 12.0 VDC or open circuit (Isource = max. 200 µA) 0 ... 1.2 VDC or short circuit Pin 8 & Pin 11 (Isink = max. 100 µA) 16 mA max.
Safety standards	compliance up to 60VDC input voltage (SELV limit)	UL 1950, EN 60950, IEC 60950
Safety approvals		UL /cUL E188913

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.


**Physical Specifications**

Case material	Epoxy
Baseplate	Epoxy
Potting material	Epoxy (UL 94V-0 rated)
Weight	32g (1.13oz)
Soldering temperature	max. 250 °C / 10 sec.

**Output Voltage Adjustment**

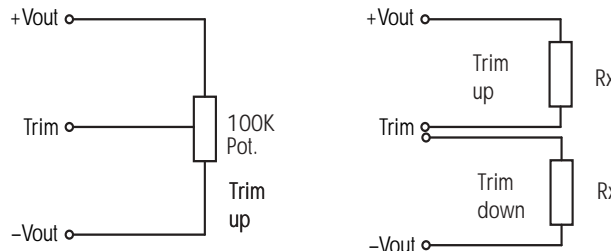

**Outline Dimensions mm (inches)**

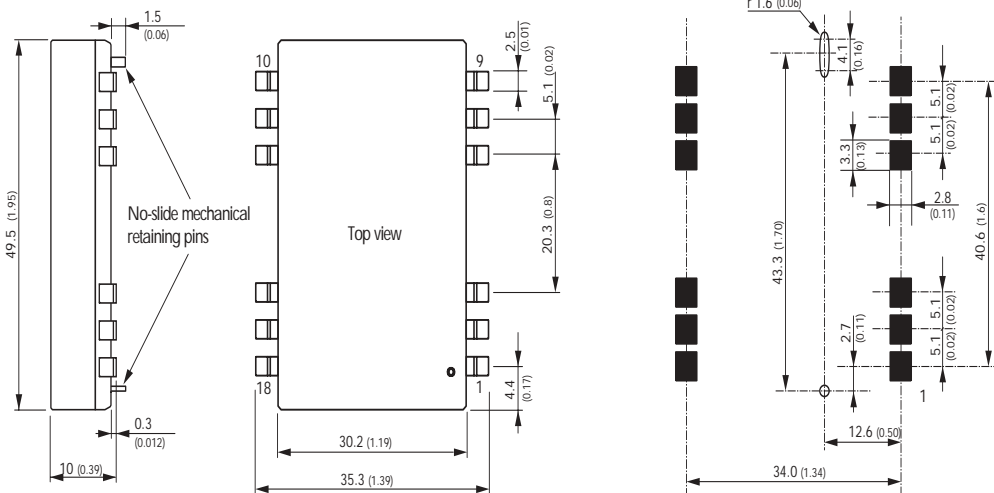

Pin-Out	
Pin	Single
1	+ Vout
2	- Vout
3	NC
4	TRIM
5	NC
6	NC
7	NC
8	Remote on/off
9	SYNC (optional)
10	NC
11	- Vin
12	+ Vin

Tolerances: ±0.1mm (0.04 Inches)

Specifications can be changed without notice