

#### Features

- ◆ Ultra-wide 4:1 input range
- ◆ SIP-9 package
- ◆ Full SMD design
- ◆ Temperature range  $-40$  to  $+85^{\circ}\text{C}$
- ◆ High efficiency
- ◆ Excellent load and line regulation
- ◆ Indefinite short-circuit protection
- ◆ I/O isolation 1500 VDC
- ◆ Remote On/Off control
- ◆ Fully RoHS compliant
- ◆ 3-year product warranty



The TMR-2WI series is a new family of isolated 2W dc-dc converter modules with regulated output, featuring ultra-wide 4:1 input voltage ranges of 9-36 VDC or 18-75 VDC. The product comes in a ultra-compact SIP-9 plastic package. An excellent efficiency up to 84% allows  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$  operation temperatures at full load. Further features include remote On/Off control and continuous short circuit protection. Typical applications for these ultra-compact converters are battery operated equipment and distributed power architectures in communication, instrumentation and industrial electronics, everywhere where space on the PCB is critical.

#### Models

| Ordercode    | Input voltage range             | Output voltage | Output current max. | Efficiency typ. |
|--------------|---------------------------------|----------------|---------------------|-----------------|
| TMR 2-2410WI | 9 – 36 VDC<br>(24 VDC nominal)  | 3.3 VDC        | 500 mA              | 71 %            |
| TMR 2-2411WI |                                 | 5 VDC          | 400 mA              | 86 %            |
| TMR 2-2412WI |                                 | 12 VDC         | 165 mA              | 79 %            |
| TMR 2-2413WI |                                 | 15 VDC         | 135 mA              | 80 %            |
| TMR 2-2421WI |                                 | $\pm 5$ VDC    | $\pm 200$ mA        | 73 %            |
| TMR 2-2422WI |                                 | $\pm 12$ VDC   | $\pm 85$ mA         | 77 %            |
| TMR 2-2423WI |                                 | $\pm 15$ VDC   | $\pm 65$ mA         | 79 %            |
| TMR 2-4810WI | 18 – 75 VDC<br>(48 VDC nominal) | 3.3 VDC        | 500 mA              | 70 %            |
| TMR 2-4811WI |                                 | 5 VDC          | 400 mA              | 72 %            |
| TMR 2-4812WI |                                 | 12 VDC         | 165 mA              | 79 %            |
| TMR 2-4813WI |                                 | 15 VDC         | 135 mA              | 78 %            |
| TMR 2-4821WI |                                 | $\pm 5$ VDC    | $\pm 200$ mA        | 70 %            |
| TMR 2-4822WI |                                 | $\pm 12$ VDC   | $\pm 85$ mA         | 76 %            |
| TMR 2-4823WI |                                 | $\pm 15$ VDC   | $\pm 65$ mA         | 76 %            |

### Input Specifications

|  |   |
|--|---|
| Input current at no load (nominal input)   | 24 Vin models: 20 mA typ.<br>48 Vin models: 15 mA typ.  |
| Input current at full load (nominal input) | 24 Vin models: 110 mA typ.<br>48 Vin models: 55 mA typ. |
| Surge voltage (100 msec. max.)             | 24 Vin models: 50 V max.<br>48 Vin models: 100 V max.   |
| Reverse voltage protection                 | 0.5 A max.  |
| Input Filter                               | capacitor type  |
| Start up time                              | <1ms (at nominal input and resistive load)              |

### Output Specifications



|  |   |
|--|---|
| Voltage set accuracy                       | ±2 %  |
| Regulation                                 | – Input variation Vin min. to Vin max. 0.5 % max.<br>– Load variation 25 – 100 % single output models: 0.75 % max.<br>dual output models: 1.0 % max. (balanced load)  |
| Minimum load                               | 25 % of rated max current (operation at lower load condition is safe but a higher output ripple will be experienced)  |
| Temperature coefficient                    | ±0.1 %/°C   |
| Ripple and noise (20 MHz Bandwidth)        | 50 mVpk-pk max  |
| Transient Response (25 % load step change) | 300 µs typ.   |
| Short circuit protection                   | constant current (automatic recovery)   |
| Capacitive load                            | 3.3 VDC / 5 VDC models: 2'200 µF max. / 1'000 µF max.<br>12 VDC / 15VDC models: 170 µF max. / 110 µF max.<br>±5 VDC / ±12 VDC models: 470 µF max. / 100 µF max. (each output)<br>±15 VDC models: 47 µF max. (each output) |

### General Specifications

|   |  |
|---|--|
| Temperature ranges  | – Operating –40°C to +85°C<br>– Case temperature +100°C max.<br>– Storage –55°C to +105°C  |
| Derating (convection cooling)                                       | 3.3 %/K above 70°C   |
| Humidity (non condensing)   | 95 % rel. H max.   |
| Reliability, calculated MTBF (MIL-HDBK-217F @ +25°C, ground benign) | >1 Mio h   |
| Isolation voltage (60 sec) – Input/Output                           | 1'500 VDC  |
| Isolation capacitance – Input/Output                                | 500 pF max.  |
| Isolation resistance – Input/Output (500 VDC)                       | >1'000 M Ohm   |
| Switching frequency   | 100 to 650 kHz (PFM)   |
| Remote On/Off control   | – On: <0.6 VDC or open<br>– Off: 2.7 to 15 VDC<br>– Off stand by input current 0.2 mA max. |
| Casing material   | non-conductive plastic   |
| Potting material  | epoxy, UL94V-0 - rated   |
| Weight  | 6.5g (0.23oz)  |

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

**Outline Dimensions**

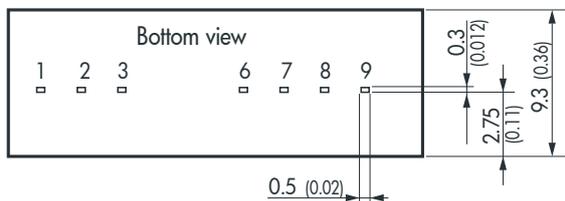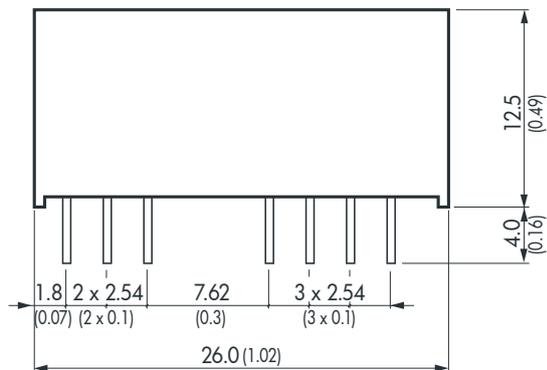

| Pin-Out |               |               |
|---------|---------------|---------------|
| Pin     | Single        | Dual          |
| 1       | -Vin (GND)    | -Vin (GND)    |
| 2       | +Vin (Vcc)    | +Vin (Vcc)    |
| 3       | Remote On/Off | Remote On/Off |
| 6       | +Vout         | +Vout         |
| 7       | No function   | Common        |
| 8       | No function   | No function   |
| 9       | -Vout         | -Vout         |

Dimensions in [mm], ( ) = Inch  
 Pin diameter  $\varnothing 0.5 \pm 0.05$  (0.02  $\pm$  0.002)  
 Tolerances  $\pm 0.5$  ( $\pm 0.02$ )  
 Pin pitch tolerances  $\pm 0.2$  ( $\pm 0.008$ )

Specifications can be changed any time without notice.