






Headers(Sockets) for pluggable terminal blocks / ECH & EHD series

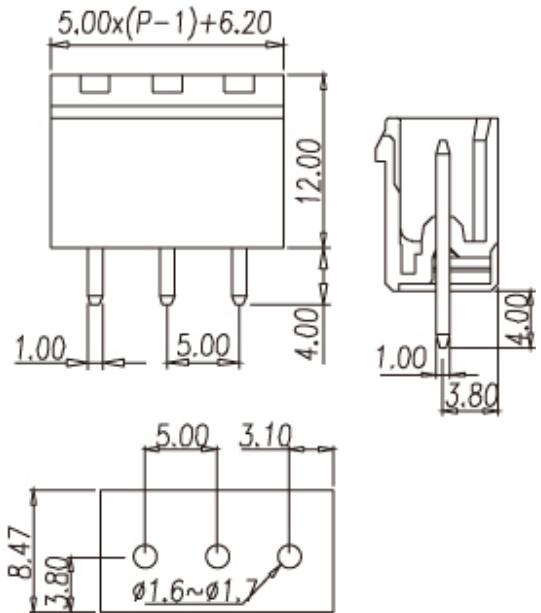

5EHDVC

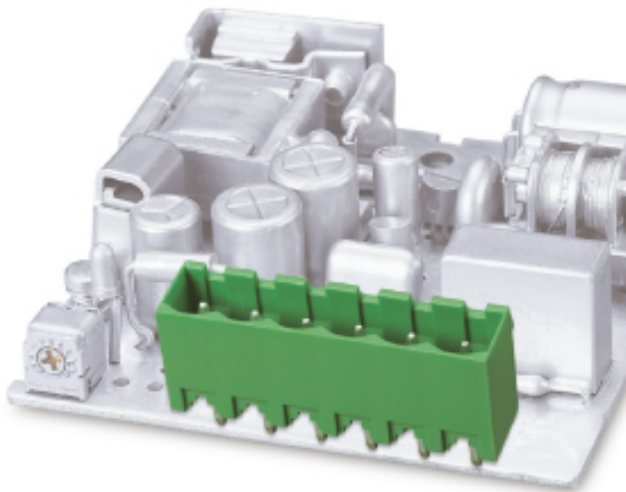

Pitch: 5.00mm

| | | |
|--------------------------------------|---|-------|
| Approval |    | |
| Technical Data | UL | IEC |
| Rated voltage | 300V | 250V |
| Rated current | 15A | 17.5A |
| Wire range | | |
| Solid wire (AWG) | | |
| Stranded wire (AWG/mm ²) | | |
| Rated surge voltage (UL/IEC/Max.) | 1.6 / 2 / 4 KV | |
| Torque (Lb-in) | | |
| Screw | | |
| Wire strip length | | |
| Pole | Cat. No. | |
| 02 | 5EHDVC-02P | |
| : | : | |
| : | : | |
| 24 | 5EHDVC-24P | |

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: infor@dinkle.com.tw