

# DATA SHEET

For a complete data sheet, please also download:

- The IC06 74HC/HCT/HCU/HCMOS Logic Family Specifications
- The IC06 74HC/HCT/HCU/HCMOS Logic Package Information
- The IC06 74HC/HCT/HCU/HCMOS Logic Package Outlines

## **74HC4050**

### Hex high-to-low level shifter

Product specification  
File under Integrated Circuits, IC06

December 1990

## Hex high-to-low level shifter

74HC4050

## FEATURES

- Output capability: standard
- I<sub>CC</sub> category: SSI

## GENERAL DESCRIPTION

The 74HC4050 is a high-speed Si-gate CMOS device and is pin compatible with the "4050" of the "4000B" series. It is specified in compliance with JEDEC standard no. 7A.

The 74HC4050 provides six non-inverting buffers with a modified input protection structure, which has no diode connected to V<sub>CC</sub>. Input voltages of up to 15 V may

therefore be used. This feature enables the non-inverting buffers to be used as logic level translators, which will convert high level logic to low level logic, while operating from a low voltage power supply. For example 15 V logic ("4000B series") can be converted down to 2 V logic.

The actual input switch level remains related to the V<sub>CC</sub> and is the same as mentioned in the family characteristics.

## APPLICATIONS

- Converting 15 V logic ("4000B" series) down to 2 V logic.

## QUICK REFERENCE DATA

GND = 0 V; T<sub>amb</sub> = 25 °C; t<sub>r</sub> = t<sub>f</sub> = 6 ns

| SYMBOL                              | PARAMETER                                | CONDITIONS                                    | TYPICAL | UNIT |
|-------------------------------------|--|---|---------|------|
|                                     |  |   | HC      |      |
| t <sub>PHL</sub> / t <sub>PLH</sub> | propagation delay nA to nY               | C <sub>L</sub> = 15 pF; V <sub>CC</sub> = 5 V | 7       | ns   |
| C <sub>I</sub>                      | input capacitance                        |   | 3.5     | pF   |
| C <sub>PD</sub>                     | power dissipation capacitance per buffer | note 1  | 14      | pF   |

## Notes

1. C<sub>PD</sub> is used to determine the dynamic power dissipation (P<sub>D</sub> in μW):

$$P_D = C_{PD} \times V_{CC}^2 \times f_i + \sum (C_L \times V_{CC}^2 \times f_o) \text{ where:}$$

f<sub>i</sub> = input frequency in MHz

f<sub>o</sub> = output frequency in MHz

C<sub>L</sub> = output load capacitance in pF

V<sub>CC</sub> = supply voltage in V

∑ (C<sub>L</sub> × V<sub>CC</sub><sup>2</sup> × f<sub>o</sub>) = sum of outputs

## ORDERING INFORMATION




See "74HC/HCT/HCU/HCMOS Logic Package Information".

# Hex high-to-low level shifter

# 74HC4050




## PIN DESCRIPTION

| PIN NO.             | SYMBOL          | NAME AND FUNCTION       |
|---------------------|-----------------|-------------------------|
| 1                   | V <sub>CC</sub> | positive supply voltage |
| 2, 4, 6, 10, 12, 15 | 1Y to 6Y        | data outputs            |
| 3, 5, 7, 9, 11, 14  | 1A to 6A        | data inputs             |
| 8                   | GND             | ground (0 V)            |
| 13, 16              | n.c.            | not connected           |

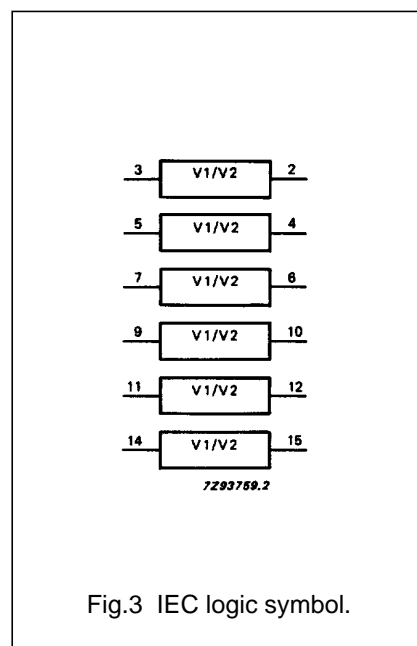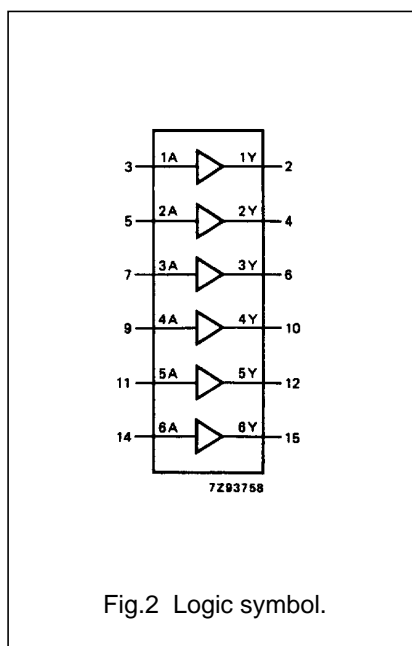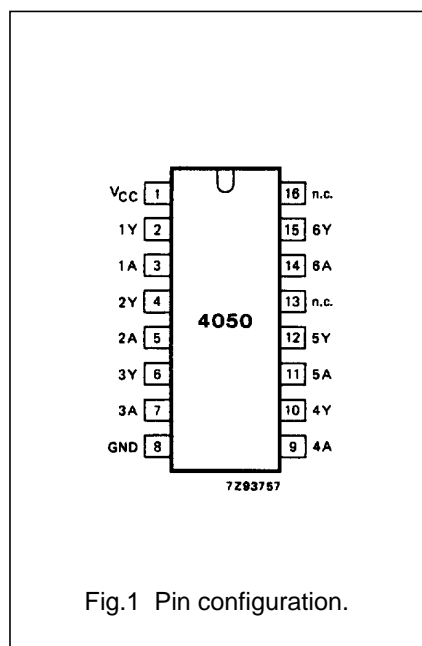

# Hex high-to-low level shifter

74HC4050

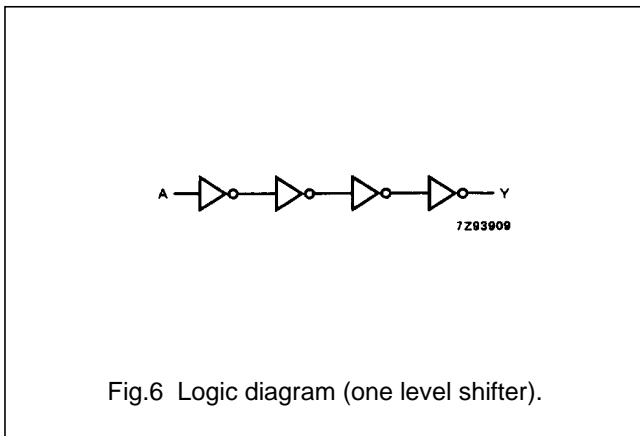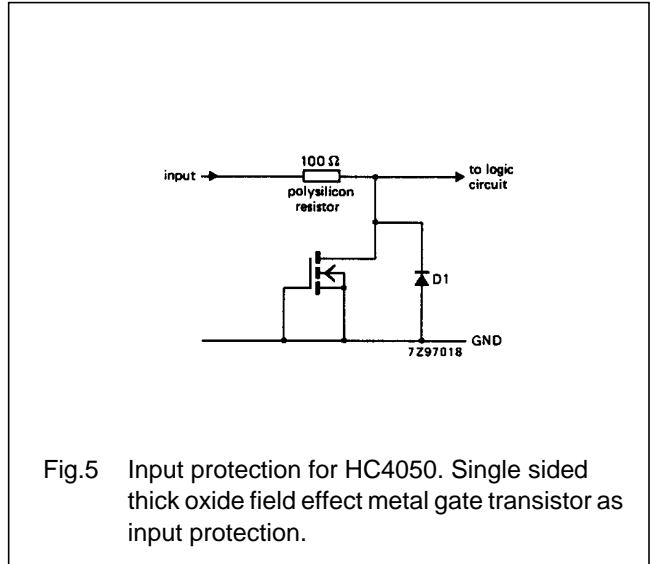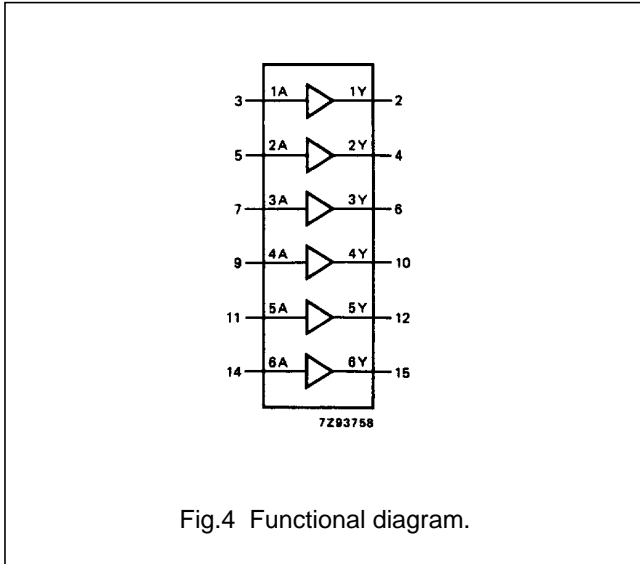

**FUNCTION TABLE** <sup>(1)</sup>

| INPUT | OUTPUT |
|-------|--------|
| nA    | nY     |
| L     | L      |
| H     | H      |

**Note**

1. H = HIGH voltage level  
L = LOW voltage level

## Hex high-to-low level shifter

74HC4050

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Voltages are referenced to GND (ground = 0 V)

| SYMBOL                          | PARAMETER   | MIN. | MAX. | UNIT | CONDITIONS                                    |
|---------------------------------|---|------|------|------|---|
| $V_{CC}$                        | DC supply voltage   | -0.5 | +7   | V    |   |
| $V_{IK}$                        | DC input voltage range  | -0.5 | +16  | V    |   |
| $-I_{IK}$                       | DC input diode current  |      | 20   | mA   | for $V_I < -0.5$ V                            |
| $\pm I_{OK}$                    | DC output diode current   |      | 20   | mA   | for $V_O < -0.5$ V or $V_O > V_{CC} + 0.5$ V  |
| $\pm I_O$                       | DC output source or sink current<br>- standard outputs              |      | 25   | mA   | for $-0.5$ V $< V_O < V_{CC} + 0.5$ V         |
| $\pm I_{CC}$ ;<br>$\pm I_{GND}$ | DC $V_{CC}$ or GND current for types<br>with:<br>- standard outputs |      | 50   | mA   |   |
| $T_{stg}$                       | storage temperature range   | -65  | +150 | °C   |   |
| $P_{tot}$                       | power dissipation per package                                       |      |      |      | for temperature range: -40 to +125 °C<br>74HC |
|                                 | plastic DIL   |      | 750  | mW   | above +70 °C: derate linearly with 12 mW/K    |
|                                 | plastic mini-pack (SO)  |      | 500  | mW   | above +70 °C: derate linearly with 8 mW/K     |

**RECOMMENDED OPERATING CONDITIONS**

| SYMBOL     | PARAMETER                           | 74HC |      |                                   | UNIT | CONDITIONS   |
|------------|-------------------------------------|------|------|-----------------------------------|------|--|
|            |                                     | min. | typ. | max.                              |      |  |
| $V_{CC}$   | DC supply voltage                   | 2.0  | 5.0  | 6.0                               | V    |  |
| $V_I$      | DC input voltage range              | GND  | -    | 15                                | V    |  |
| $T_{amb}$  | operating ambient temperature range | -40  |      | +85                               | °C   | see DC and AC characteristics  |
| $T_{amb}$  | operating ambient temperature range | -40  |      | +125                              | °C   |  |
| $t_r, t_f$ | input rise and fall times           |      | 6.0  | 1000<br>500<br>400<br>650<br>1000 | ns   | $V_{CC} = 2.0$ V; $V_{IN} = 2.0$ V<br>$V_{CC} = 4.5$ V; $V_{IN} = 4.5$ V<br>$V_{CC} = 6.0$ V; $V_{IN} = 6.0$ V<br>$V_{CC} = 6.0$ V; $V_{IN} = 10.0$ V<br>$V_{CC} = 6.0$ V; $V_{IN} = 15.0$ V |

## Hex high-to-low level shifter

## 74HC4050

**DC CHARACTERISTICS FOR 74HC**

Voltages are referenced to GND (ground = 0 V)

| SYMBOL           | PARAMETER                                    | T <sub>amb</sub> (°C) |      |      |            |      |             |      | UNIT | TEST CONDITIONS        |                              |                          |
|------------------|--|-----------------------|------|------|------------|------|-------------|------|------|------------------------|------------------------------|--------------------------|
|                  |  | 74HC                  |      |      |            |      |             |      |      | V <sub>CC</sub><br>(V) | V <sub>I</sub>               | OTHER                    |
|                  |  | +25                   |      |      | -40 to +85 |      | -40 to +125 |      |      |                        |                              |                          |
|                  |  | min.                  | typ. | max. | min.       | max. | min.        | max. |      |                        |                              |                          |
| V <sub>IH</sub>  | HIGH level input voltage                     | 1.5                   | 1.3  |      | 1.5        |      | 1.5         |      | V    | 2.0                    |                              |                          |
|                  |  | 3.15                  | 2.4  |      | 3.15       |      | 3.15        |      |      | 4.5                    |                              |                          |
|                  |  | 4.2                   | 3.1  |      | 4.2        |      | 4.2         |      |      | 6.0                    |                              |                          |
| V <sub>IL</sub>  | LOW level input voltage                      |                       | 0.7  | 0.5  |            | 0.5  |             | 0.5  | V    | 2.0                    |                              |                          |
|                  |  |                       | 1.8  | 1.35 |            | 1.35 |             | 1.35 |      | 4.5                    |                              |                          |
|                  |  |                       | 2.3  | 1.8  |            | 1.8  |             | 1.8  |      | 6.0                    |                              |                          |
| V <sub>OH</sub>  | HIGH level output voltage - all outputs      | 1.9                   | 2.0  |      | 1.9        |      | 1.9         |      | V    | 2.0                    | V <sub>IH</sub>              | -I <sub>O</sub> = 20 μA  |
|                  |  | 4.4                   | 4.5  |      | 4.4        |      | 4.4         |      |      | 4.5                    | or                           | -I <sub>O</sub> = 20 μA  |
|                  |  | 5.9                   | 6.0  |      | 5.9        |      | 5.9         |      |      | 6.0                    | V <sub>IL</sub>              | -I <sub>O</sub> = 20 μA  |
| V <sub>OH</sub>  | HIGH level output voltage - standard outputs | 3.98                  |      |      | 3.84       |      | 3.7         |      | V    | 4.5                    | V <sub>IH</sub>              | -I <sub>O</sub> = 4.0 mA |
|                  |  | 5.48                  |      |      | 5.34       |      | 5.2         |      |      | 6.0                    | or                           | -I <sub>O</sub> = 5.2 mA |
| V <sub>OL</sub>  | LOW level output voltage - all outputs       |                       |      | 0.1  |            | 0.1  |             | 0.1  | V    | 2.0                    | V <sub>IH</sub>              | I <sub>O</sub> = 20 μA   |
|                  |  |                       |      | 0.1  |            | 0.1  |             | 0.1  |      | 4.5                    | or                           | I <sub>O</sub> = 20 μA   |
|                  |  |                       |      | 0.1  |            | 0.1  |             | 0.1  |      | 6.0                    | V <sub>IL</sub>              | I <sub>O</sub> = 20 μA   |
| V <sub>OL</sub>  | LOW level output voltage - standard outputs  |                       |      | 0.26 |            | 0.33 |             | 0.4  | V    | 4.5                    | V <sub>IH</sub>              | I <sub>O</sub> = 4.0 mA  |
|                  |  |                       |      | 0.26 |            | 0.33 |             | 0.4  |      | 6.0                    | or                           | I <sub>O</sub> = 5.2 mA  |
| ± I <sub>I</sub> | input leakage current                        |                       |      | 0.1  |            | 1.0  |             | 1.0  | μA   | 6.0                    | V <sub>CC</sub><br>or<br>GND |                          |
|                  |  |                       |      | 0.5  |            | 5.0  |             | 5.0  | μA   | 2.0<br>to<br>6.0       | 15 V                         |                          |
| I <sub>CC</sub>  | quiescent supply current                     |                       |      | 2.0  |            | 20.0 |             | 40.0 | μA   | 6.0                    | 15 V<br>or<br>GND            |                          |

# Hex high-to-low level shifter


74HC4050

## AC CHARACTERISTICS FOR 74HC

GND = 0 V;  $t_r = t_f = 6$  ns;  $C_L = 50$  pF

| SYMBOL                              | PARAMETER                     | T <sub>amb</sub> (°C) |              |                |            |                 |             |                 |    | UNIT              | TEST CONDITIONS     |           |
|-------------------------------------|-------------------------------|-----------------------|--------------|----------------|------------|-----------------|-------------|-----------------|----|-------------------|---------------------|-----------|
|                                     |                               | 74HC                  |              |                |            |                 |             |                 |    |                   | V <sub>CC</sub> (V) | WAVEFORMS |
|                                     |                               | +25                   |              |                | -40 to +85 |                 | -40 to +125 |                 |    |                   |                     |           |
|                                     |                               | min.                  | typ.         | max.           | min.       | max.            | min.        | max.            |    |                   |                     |           |
| t <sub>PHL</sub> / t <sub>PLH</sub> | propagation delay<br>nA to nY |                       | 25<br>9<br>7 | 85<br>17<br>14 |            | 105<br>21<br>18 |             | 130<br>26<br>22 | ns | 2.0<br>4.5<br>6.0 | Fig.7               |           |
| t <sub>THL</sub> / t <sub>TLH</sub> | output transition time        |                       | 19<br>7<br>6 | 75<br>15<br>13 |            | 95<br>19<br>16  |             | 110<br>22<br>19 | ns | 2.0<br>4.5<br>6.0 | Fig.7               |           |

## AC WAVEFORMS

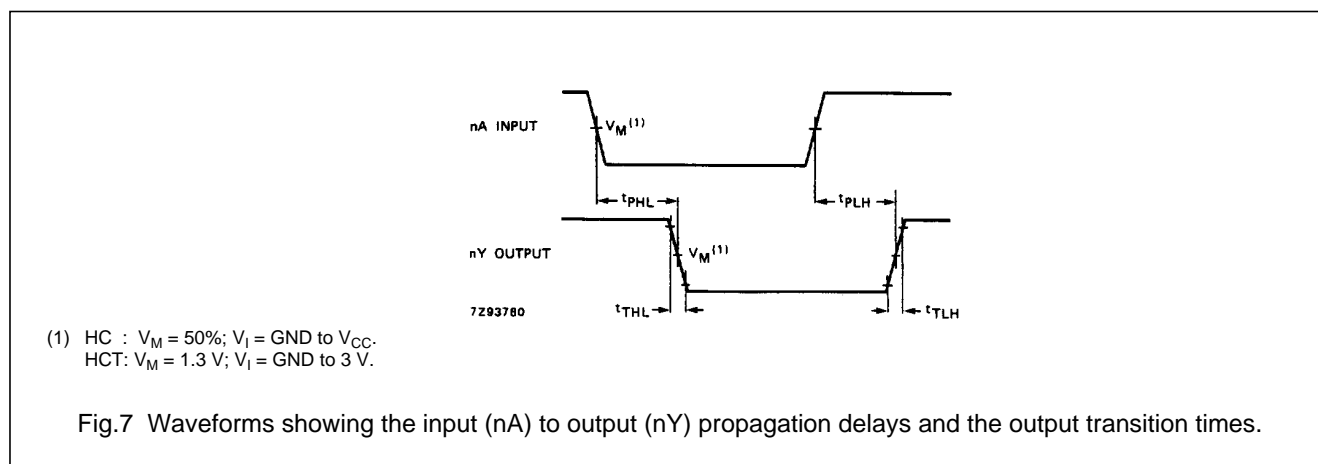

## PACKAGE OUTLINES

See "74HC/HCT/HCU/HCMOS Logic Package Outlines".