

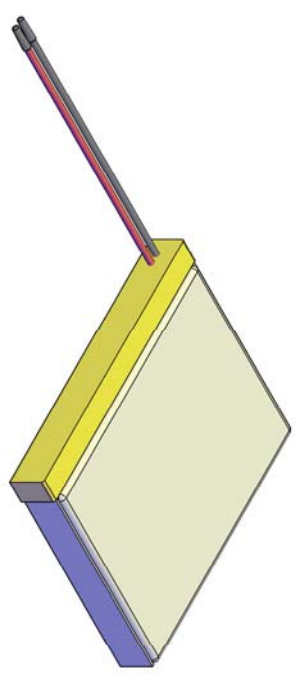
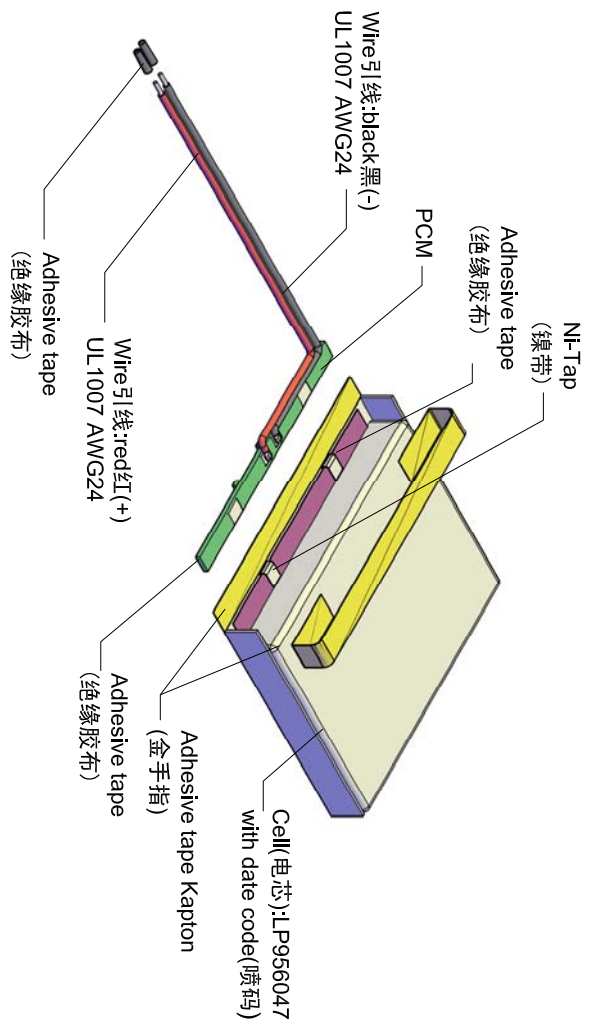


Circuit diagram

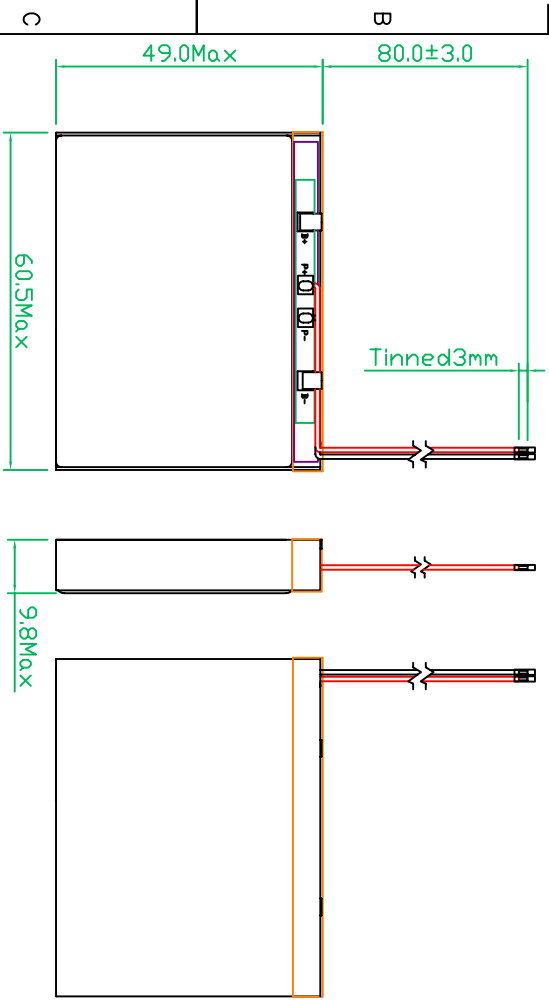

Cell(电芯):	LP956047	Date code(喷码):	Inner controlling standard(内控标准)	
	Min.Capacity 最低容量 (mAh) (0.2C, 25±3°C) *Single battery capacity (单体电池容量)	2800	*PCM protection (保护板参数)	Overcurrent Detection(A) (过流值)
Battery Specification (电池参数)	Typical Capacity 典型容量 (mAh) (0.2C, 25±3°C) *Single battery capacity (单体电池容量)	3000	Overcharge Detection Voltage(V) (过充保护电压)	4.28±0.05
	Nominal Voltage 标称电压 (V)	3.7	Overdischarge Detection Voltage(V) (过放保护电压)	2.3±0.1
Internal impedance 内阻 (≦)	200	Ambient Conditions (工作环境)	Charge Temp. 充电温度 (°C)	0-45
			Discharge Temp. 放电温度 (°C)	-20-60
			Humidity(湿度)	65±20%



Title		LP956047-PCM-LD	
File NO.		A03260	
Drawn:	Moyongdi	Revise No.:	E4-2009
Checked 1:	Jane	Projection:	
Checked 2:	Keyan	Page:	1/1
Approved:		Scale:	1 : 1
Draw Date:	2010/03/19	Unit:	mm

Remark(备注):
 1. No scratch, distortion, discoloration and leakage on the appearance of the cell(电池表面无划痕、变形、污点及漏液等现象).
 2. RoHS compliant(严格按照ROHS要求生产).