

STANDARD TEST LEADS

AL-36



CE

- Wide grip alligator clips with integral finger guard, large 35mm high tension spring mouth.
- PVC-insulated wire (Red-15m, Yellow-10m, Green-5m)
- Right-angle connector.
- IEC/EN 61010-031 : 2002 CAT III 600V 2A


AL-36R Red
AL-36Y Yellow
AL-36G Green

AL-36L



- Wide grip alligator clips with integral finger guard, large 35mm high tension spring mouth.
- PVC-insulated wire (Red-30m, Yellow-20m, Green-10m)
- Right-angle connector.


AL-37

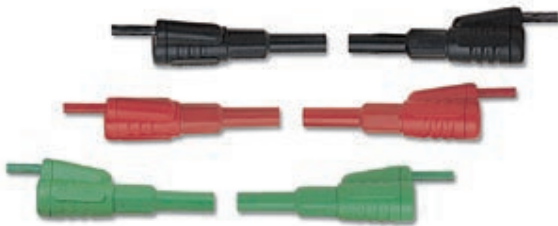

- Stacking shrouded plug each end.
- Silicone wire 50cm.
- Axial mount 4mm banana jack.

AL-37R Red
AL-37B Black
AL-37G Green


AL-37H

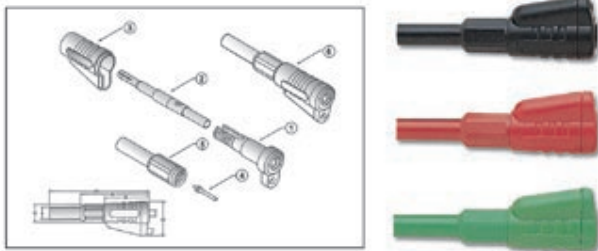

- Stacking shrouded plug.
- Axial mount 4mm banana jack.

AL-37HR Red
AL-37HB Black
AL-37HG Green

AL-37S

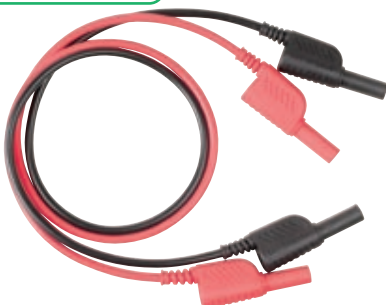

- Stacking shrouded plug each end.
- PVC insulated wire 50cm(0.08/170).
- Axial mount 4mm banana jack.