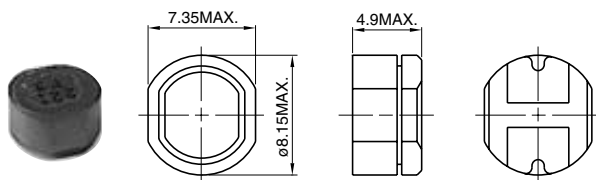


SHIELDED


CDR74B

Outline

Various kinds of high power SMT inductors which are superior to high saturation. They are also magnetically shielded type to prevent noise radiation.

Dimensions (mm)


(10 μ H – 270 μ H)

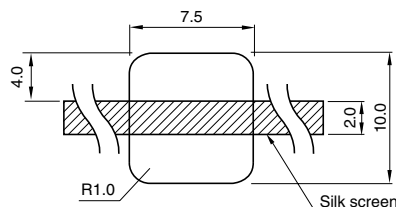LAND PATTERNS(mm)


In order to prevent short-circuiting, a silk screen is recommended.

CONSTRUCTION


◆ TYPE CDR74B

Parts No.	Inductance	D.C.R. (Ω) (Max) Typical / Rated D. C. Current (A)	Parts No.	Inductance	D.C.R. (Ω) (Max) Typical / Rated D. C. Current (A)
100	10 μ H	0.07 / 1.65	820	82 μ H	0.43 / 0.62
120	12 μ H	0.07 / 1.57	101	100 μ H	0.49 / 0.55
150	15 μ H	0.08 / 1.39	121	120 μ H	0.68 / 0.49
180	18 μ H	0.10 / 1.29	151	150 μ H	0.94 / 0.44
220	22 μ H	0.13 / 1.12	181	180 μ H	1.00 / 0.40
270	27 μ H	0.16 / 1.06	221	220 μ H	1.18 / 0.36
330	33 μ H	0.18 / 0.97	271	270 μ H	1.30 / 0.33
390	39 μ H	0.18 / 0.91	331	330 μ H	
470	47 μ H	0.27 / 0.80	391	390 μ H	
560	56 μ H	0.29 / 0.76	471	470 μ H	
680	68 μ H	0.33 / 0.68			

Measuring Freq. (L)

10 μ H – 82 μ H (2.52MHz), 100 μ H – 820 μ H (1kHz)

Tolerance of Inductance

CDR74B 10 μ H – 27 μ H $\pm$ 20% (M), 33 μ H – 82 μ H $\pm$ 15% (L), 100 μ H – 270 μ H $\pm$ 10% (K)

Rated D.C. Current

This indicates the value of current when the inductance is 10% lower than its initial value at D.C. superimposition or D.C. current when at t=40°C, whichever is lower. (Ta=20°C)

Sales Contact

North America
1701 Golf Road, Tower 3
Suite 400, Rolling
Meadows, IL 60008, USA
Tel: (1) 847 545-6700
Fax: (1) 847 545-6720

Japan
Nihonbashi- ingyocho
2-Chome, Chuo-ku,
Tokyo, Japan
Tel: (81) 03 3667-3301
Fax: (81) 03 3667-3456

Hong Kong
14/F, Eastern Centre,
1065 King's Road, Quarry
Road, Hong Kong
Tel: (852) 2880-6688
Fax: (852) 2880-9596

Taiwan
No. 171, Futech Street,
Hsin-I, Taipei, Taiwan,
ROC
Tel: (886) 2 2726-2177
Fax: (886) 2 2728-2726

Singapore
996 Bendemeer
Road #04-05 to 06
Singapore 339944
Tel: (65) 2963-388
Fax: (65) 2963-390

Europe
Chaussee de Tervuren113A,
1160 Brussels
Belgium
Email:
europe.sales@hk.sumida.com