


## Dimming LED Driver

## LED調光驅動器

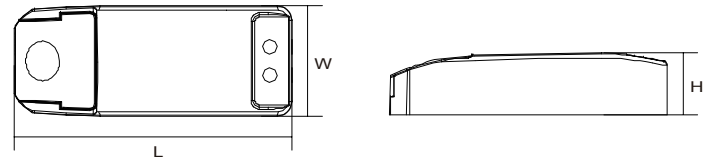

### Product Features:

- Dimmable with ordinary TRIAC dimmer (leading edge or trailing edge dimmer)
- Constant current driver
- Independent compact design
- Easy press cable lock
- Captured terminal screws
- Safe no-load operation
- Overload & Short circuiting protection
- Overheating protection
- Simple installation
- SELV equivalent
- Protection class II
- Dimming range 1...100%

### 產品特點:

- 適用普通可控矽調光器(前切相和後切相)
- 恒流驅動
- 超小體積，獨立式緊湊型設計
- 簡便自鎖式壓線蓋
- 螺絲鎖緊大接線端子，方便多規格線接駁
- 安全無負載保護裝置
- 輸出過載、短路保護
- 過溫保護功能
- 安裝經濟便捷
- 符合安全特低電壓標準
- 保護等級 II
- 調光範圍 1...100%光通量

### Standards 標準

- EN 61347-1
- EN 61347-2-13
- EN 55015
- EN 61000-3-2
- EN 61000-3-3
- EN 61547

Model No. 型號	Input Voltage 額定電壓 (V)	Max. Output Power 功率 (W)	Output Current 輸出電流 (mA)	Output Voltage 輸出電壓 (V)	Power Factor 功率因數 (λ)	Ambient Temperature 環境溫度 ta (°C)	Casing Temperature 最大外殼溫度 tc (°C)	Dimensions 尺寸 (mm)	Weight 重量 (g)	Wiring Diagram 接線圖
DIM350mA/9W	220-240	9	350	6-26 (2-7 LEDs)	0.95	-20...+50	80	113x44x28	108	A
DIM350mA/18W	220-240	18	350	15-52 (5-14 LEDs)	0.95	-20...+50	80	113x44x28	108	A
DIM500mA/18W	220-240	18	500	9-36 (3-10 LEDs)	0.95	-20...+50	80	113x44x28	108	A
DIM700mA/18W	220-240	18	700	6-26 (2-7 LEDs)	0.95	-20...+50	80	113x44x28	108	A
DIM1050mA/18W	220-240	18	1050	3-18 (1-5 LEDs)	0.95	-20...+50	80	113x44x28	108	A

