
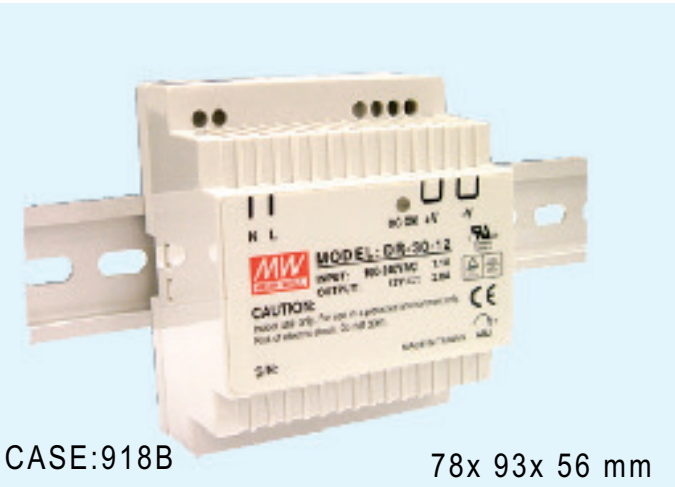


# 30W Single Output Class II DIN Rail Power



- Universal AC input / Full range
- Installed on DIN rail TS35 / 7.5 or 15
- Protections: Short circuit / Overload / Over voltage
- Isolation Class II
- Approvals: UL / CUL / TUV / CB / CE
- LED indicator for power on
- Cooling by free air convection
- 100% full load burn-in test
- 3 years warranty

AC input voltage range	85~264VAC; 120~370VDC
AC inrush current	Cold start, 15A at 115VAC, 30A at 230VAC
DC adjustment range	±10% rated output voltage
Overload protection	105%~160% constant current limiting, auto-recovery
Over voltage protection	115%~135% rated output voltage
Setup, rise, hold up time	100ms, 30ms, 100ms at full load and 230VAC
Withstand voltage	I/P-O/P:3KVAC, I/P-FG:1.5KVAC, 1minute
Working temperature	-20~50°C@100%, 60°C@80% load
Safety standards	UL60950-1, TUV EN60950-1 approved
EMC standards	EN55022 class B, EN61000-3-2,3, EN61000-6-2, EN61000-4-2,3,4,5,6,8,11, ENV50204, EN61204-3
Connection	I/P: 2 poles, O/P: 4 poles screw DIN terminal
Packing	0.27kg ; 48pcs / 14.0kg / 1.02CUFT

Stock No.	Model No.	Output	Tol.	R&N	Effi.
11241	DR-30-5	5V, 0~3.0A	±2%	80mV	74%
11242	DR-30-12	12V, 0~2.0A	±1%	120mV	81%
11243	DR-30-15	15V, 0~2.0A	±1%	120mV	82%
11244	DR-30-24	24V, 0~1.5A	±1%	150mV	83%