




DS4000 Series Digital Oscilloscope

- Bandwidth 100MHz,200MHz,350MHz,500MHz
- Max. Sample Rate 4G Sa/s
- Standard Memory Depth 140Mpts
- 2 or 4 channels(DS40X2,DS40X4)
- Waveform capture rate up to 110,000 wfs/s
- Innovative "UltraVision" technology
- Hardware based real time waveform record and analysis function(Standard)
- A variety of trigger and serial bus decoding functions
- 9 inch WVGA 256 level grading display
- Lower noise floor, the Min. vertical sensitivity is 1mV/div
- Standard connectivities (LAN,USB,VGA ...)
- Compact size, light weight, easy to use

UltraVision

DS4000 Series is the new mainstream digital scope to meet the customer's applications with its innovative technology, industry leading specifications, powerful trigger functions and broad analysis capabilities.

DS4000 Series Digital Oscilloscope

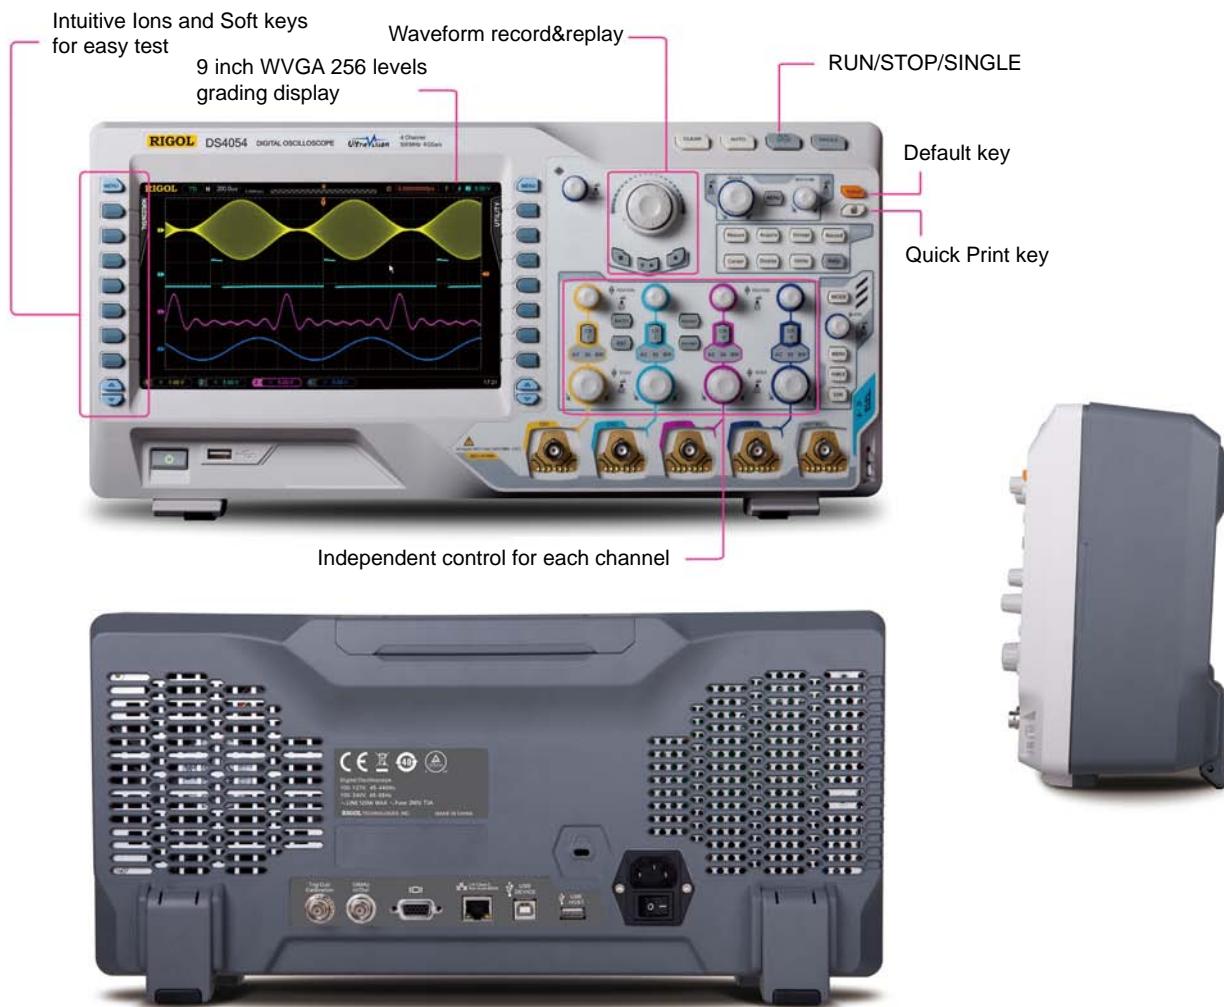

Product Dimensions: Width X Height X Depth = 456.0mm X 225.1 mm X 140.0 mm Weight: 4.8 kg ± 0.2 kg (Without Package)

► Innovative UltraVision technology



- Deeper Memory Depth(Std.140M pts)
- Higher Waveform capture rate (Up to 110,000wfms/s)
- Real Time waveform record & replay(Up to 200,000 frames)
- Multi-level intensity grading display(Up to 256 levels)

► Models and key Specs

Models	DS4054	DS4052	DS4034	DS4032	DS4024	DS4022	DS4014	DS4012
Bandwidth	500 MHz		350 MHz		200 MHz		100 MHz	
Channels	4	2	4	2	4	2	4	2
Sample rate					4 GSa/s (Max.)			
Memory Depth					140 Mpts (Standard)			
Waveform Capture rate					110,000 wfms/s (Max.)			
Frames recorded					200,000 Frames (Max.)			
Standard probes					2 or 4 sets RP3500(500MHz BW probe) for DS40X2 or DS40X4			


► Features and Benefits

UltraVision: Up to 180K Waveforms/s Waveform capture rate




Find the infrequent problem easily

UltraVision: Realtime waveform record,replay, analysis function (std.)

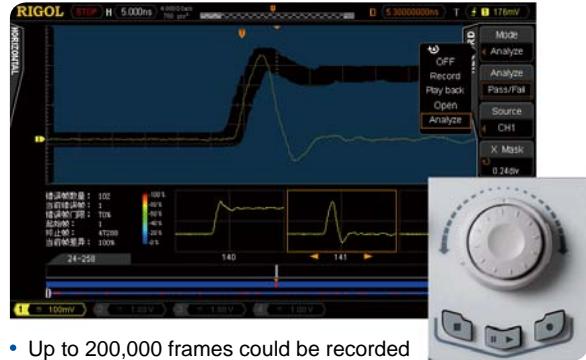

- Up to 200,000 frames could be recorded
- “WaveFinder”-Dedicated data search knob
- Replay and analyze the recorded waveforms

UltraVision: Deeper Memory with Multi-Level intensity grading display

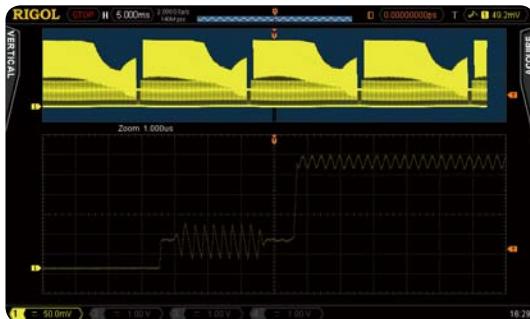

Provide the capability to see both the panorama and detail simultaneously

Advanced math function (user defined)




Mask test functions



User defined Mask,Pass/Fail counts,Stop on Fail,Fail Alarm


Automatic measurements with statistics

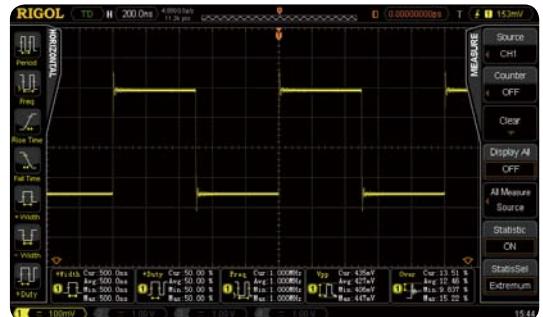


- Automatic measurements for Horizontal and vertical parameters
- Display up to 5 measurement items with statistics simultaneously
- Display all measurement items with the current value in the screen
- Intuitive icon and soft key operation for simplified testing

Serial bus decoding functions

I2C Decoding

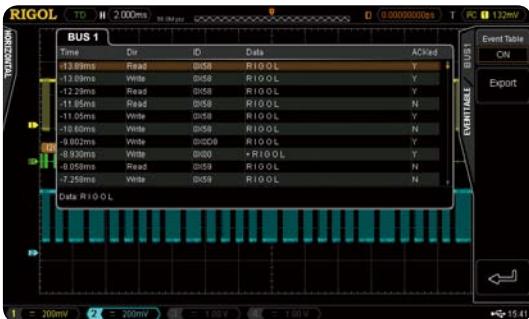

Measurement History: Show the trend of the parameters

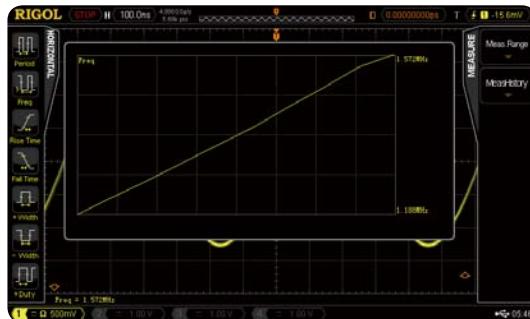

RS232/UART




Complete Connectivity



► The probes supported by DS4000 series:

Model Number	Attenuation Ratio	Bandwidth	Input R	Max. Input voltage	Recommended applications
RP2200	1:1 or 10:1	1X: DC~7 MHz 10X:DC~150 MHz	1X: $1M\Omega \pm 2\%$ 10X: $10 M\Omega \pm 2\%$	1X: CAT II 150 V AC 10X: CAT II 300V AC	Small signal test (1X) General purpose test
RP3300	1:1 or 10:1	1X: DC~8 MHz 10X:DC~350 MHz	1X: $1 M\Omega \pm 2\%$ 10X: $10 M\Omega \pm 2\%$	1X: CAT II 150 V AC 10X: CAT II 300V AC	Small signal test (1X) General purpose test
RP3500	10:1	DC~500 MHz	$10 M\Omega \pm 2\%$	CAT II 300VAC	General purpose test
RP5600	10:1	DC~600 MHz	$10 M\Omega \pm 2\%$	CAT II 300VAC	General purpose test
RP6150	10:1	DC~1.5 GHz	$500 \Omega \pm 10 \Omega$	CAT I 10VAC	High frequency single ended small signal test
RP1300H	100:1	DC~300 MHz	100 MΩ	CAT I 2000V (DC+AC), CAT II 1500 V (DC+AC)	High voltage test
RP1050H	1000:1	DC~50 MHz	$10 M\Omega \pm 0.5\%$	DC: 0~15KV DC AC: pulse <=30 KVp-p AC: sine wave <=10 KVrms	High voltage test
RP7150	10:1	DC~1.5 GHz	Differential mode: $50 k\Omega \pm 2\%$ Single ended mode: $24 k\Omega \pm 2\%$	30V Peak, CAT I	Differential /Single ended high frequency signal test

RP2200 150MHz Passive Probe

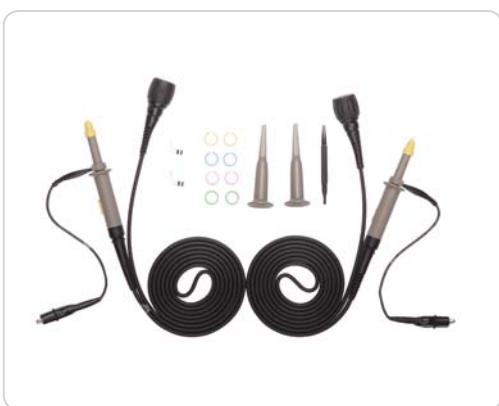

RP3300 350MHz Passive Probe



RP6150 1.5GHz Passive Probe



RP3500 500MHz Passive Probe



RP5600 600MHz Passive Probe



- 600MHz Bandwidth
- 10:1 passive probe
- Shipped with probe positioner and its accessories
- Identified by DS6000 automatically

RP7150 1.5GHz Active Probe



- 1.5GHz Bandwidth
- Active probe supports both differential and single-ended measurements
- Shipped with the browser probe head
- Provides many kinds of probe connection accessories
- Identified by DS6000 automatically

RP1300H 300MHz High Voltage Probe



RP1050H 50MHz High Voltage Probe



► Specifications

All the specifications are guaranteed except the parameters marked with "Typical" and the oscilloscope needs to operate for more than 30 minutes under the specified operation temperature.

Sample	
Sample Mode	Real-time Sample
Real Time	4.0 GSa/s (single-channel)
Sample Rate	2.0 Gsa/s (dual-channel)
Peak Detect	250 ps (single-channel) 500 ps (dual-channel)
Averaging	After all the channels finish N samples at the same time, N can be 2, 4, 8, 16, 32, 64, 128, 256, 512, 1024, 2048, 4096 or 8192.
High Resolution	12 bits of resolution when $\geq 5 \mu\text{s}/\text{div}$ @ 4 GSa/s (or $\geq 10 \mu\text{s}/\text{div}$ @ 2 GSa/s).
Memory Depth	single-channel: Auto, 14k pts, 140k pts, 1.4M pts, 14M pts and 140M pts are available Dual-channel: Auto, 7k pts, 70k pts, 700k pts, 7M pts and 70M pts are available
Input	
Number of Channels	DS40X4: four channels DS40X2: two channels
Input Coupling	DC, AC or GND
Input Impedance	($1 \text{ M}\Omega \pm 1\%$) ($14 \text{ pF} \pm 3 \text{ pF}$) or $50 \Omega \pm 1.5\%$
Probe Attenuation Coefficient	0.01X-1000X 1-2-5 step
Maximum Input Voltage (1MΩ)	Maximum Input Voltage of the Analog Channel CAT I 300 Vrms, CAT II 100 Vrms, Transient Overvoltage 1000V pk with RP2200 10:1 probe: CAT II 300 Vrms with RP3300 10:1 probe: CAT II 300 Vrms with RP3500 10:1 probe: CAT II 300 Vrms with RP5600 10:1 probe: CAT II 300 Vrms
Horizontal Time Base Scale	DS405x: 1 ns/div to 50 s/div DS403x: 1 ns/div to 50 s/div DS402x: 2 ns/div to 50 s/div DS401x: 5 ns/div to 50 s/div
Time Base Accuracy	$\leq \pm 4 \text{ ppm}$
Time Base Drift	$\leq \pm 2 \text{ ppm}/\text{Year}$
Delay Range	Pre-trigger (negative delay): ≥ 1 screen width Post-trigger (positive delay): 1 s to 1000 s
Time Base Mode	Y-T, X-Y, Roll, Delayed
Number of X-Ys	2 paths at the same time (four-channel model)
Waveform Capture Rate ¹	110,000 wfms/s (dots display)
Vertical	
Bandwidth (-3dB)	DS405x: DC to 500 MHz DS403x: DC to 350 MHz DS402x: DC to 200 MHz DS401x: DC to 100 MHz
Single Bandwidth	DS405x: DC to 500 MHz DS403x: DC to 350 MHz DS402x: DC to 200 MHz DS401x: DC to 100 MHz
Vertical Resolution	8bits, two channels sample at the same time
Vertical Scale	1 mV/div to 5 V/div (1 MΩ) 1 mV/div to 1 V/div (50 Ω)

Offset Range	1 mV/div to 120 mV/div: $\pm 1.2\text{V}(50 \Omega)$ 125 mV/div to 1 V/div: $\pm 12\text{V}(50 \Omega)$ 1 mV/div to 225 mV/div: $\pm 2\text{V}(1\text{M}\Omega)$ 230 mV/div to 5 V/div: $\pm 40\text{V}(1\text{M}\Omega)$
Bandwidth Limit ²	DS405x/ DS403x: 20 MHz/100MHz/200MHz DS402x: 20 MHz/100MHz DS401x: 20 MHz $\leq 5 \text{ Hz}$ (on BNC)
Low Frequency Response (AC coupling -3dB)	DS405x: 700ps DS403x: 1ns DS402x: 1.8ns DS401x: 3.5ns
Rise Time ²	$\pm 2\%$ full scale
DC Gain Accuracy	200 mV/div to 5 V/div: $0.1 \text{ div} \pm 2 \text{ mV} \pm 0.5 \text{ offset}$
DC Offset Accuracy	2 mV/div to 195 mV/div: $0.1 \text{ div} \pm 2 \text{ mV} \pm 1.5 \text{ offset}$
ESD Tolerance	$\pm 2 \text{ kV}$
Channel to Channel Isolation	DC to maximum bandwidth: >40 dB
Trigger	
Trigger Level Range	Internal: $\pm 6 \text{ div}$ from the center of the screen EXT: $\pm 0.8 \text{ V}$
Trigger Mode	Auto, Normal, Single
Holdoff Range	100 ns to 10 s
High Frequency Rejection ²	50 kHz
Low Frequency Rejection ²	5 kHz
Edge Trigger	Rising, Falling, Rising&Falling
Edge Type	
Pulse Trigger	
Pulse Condition	Positive Pulse Width (greater than, lower than, within specified interval) Negative Pulse Width (greater than, lower than, within specified interval)
Pulse Width Range	4 ns to 4 s
Slope Trigger	
Slope Condition	Positive Slope (greater than, lower than, within specified interval) Negative Slope (greater than, lower than, within specified interval)
Time Setting	10 ns to 1 s
Video Trigger	
Signal Standard	Support standard NTSC, PAL and SECAM broadcasting standards Support 480P, 576P, 720P, 1080P and 1080I HDTV standards
Pattern Trigger	
Pattern Setting	H, L, X, Rising Edge, Falling Edge
RS232/UART Trigger	
Trigger Condition	Start, Error, Check Error, Data
Baud	2400bps, 4800bps, 9600bps, 19200bps, 38400bps, 57600bps, 115200bps, User
Data Bits	5 bit, 6 bit, 7 bit, 8 bit
I2C Trigger	
Trigger Condition	Start, Restart, Stop, Missing ACK, Address, Data, A&D
Address Bits	7 bit, 10 bit
Address Range	0 to 119, 0 to 1023
Byte Length	1 to 5

SPI Trigger	CS, Timeout	Display	9 inches (229 mm) TFT LCD display
Trigger Condition	100 ns to 999 ns	Display Resolution	800 horizontalxRGBx480 vertical pixel
Timeout Value	4 bit to 32 bit	Display Color	160,000 color
Data Bits	H, L, X	Persistence Time	Min, 50ms, 100ms, 200ms, 500ms, 1 s, 2 s, 5 s, 10 s, 20 s, Infinite
Data Line Setting	Rising Edge, Falling Edge	Display Type	Dots, Vectors
Clock Edge		Real-time Clock	Time and Date (user adjustable)
 CAN Trigger		 I/O	
Signal Type	Rx, Tx, CAN_H, CAN_L, Differential	Standard Ports	Dual USB HOST, USB DEVICE, LAN, VGA output, 10MHz input/output, Aux output (trigger output, quick edge, pass/fail, calibration, GND)
Trigger Condition	SOF, EOF, Frame Type, Frame Error		
Baud	10kbps, 20kbps, 33.3kbps, 50kbps, 62.5kbps, 83.3kbps, 100kbps, 125kbps, 250kbps, 500kbps, 800kbps, 1Mbps, User		
 Sample Point	5% to 95%	 General Specifications	
Frame Type	Data, Remote, Error, OverLoad	Probe Compensation	
Error Type	Bit Fill, Answer Error, Check Error, Format Error, Random Error	Output Voltage ²	About 3 V, peak-peak
 FlexRay Trigger		Frequency ²	1 kHz
Baud	2.5Mb/s, 5Mb/s, 10Mb/s	Power	
Trigger Condition	Frame, Symbol, Error, TSS	Power Voltage	100-120 V/50Hz/60Hz/400Hz
 USB Trigger		Power	100-240 V/50 Hz/60Hz
Signal Speed	Low Speed, Full Speed	Fuse	Maximum 120 W
Trigger condition	SOP, EOP, RC, Suspended, ExitSuspend	Environment	3 A, T degree, 250 V
 Measure		Temperature Range	In operation: 0 °C to +50 °C Out of operation: -20 °C to +70 °C
Cursor	Manual mode Voltage deviation between cursors (ΔV) Time deviation between cursors (ΔT)	Cooling Method	Fan
	Track mode Reciprocal of ΔT (Hz) ($1/\Delta T$) Voltage and time values of the waveform point	Humidity Range	Under +35 °C: ≤90% relative humidity +35 °C to +50 °C: ≤60% relative humidity
	Auto mode Allow to display cursors during auto measurement	Altitude	In operation: under 3,000 meters Out of operation: under 15,000 meters
 Auto Measurement	Measurements of Maximum, Minimum, Peak-Peak Value, Top Value, Bottom Value, Amplitude, Average, Mean Square Root, Overshoot, Pre-shoot, Frequency, Period, Rise Time, Fall Time, Positive Pulse Width, Negative Pulse Width, Positive Duty Cycle, Negative Duty Cycle, Delay A-B \downarrow , Delay A-B \uparrow , Phase A-B \downarrow , Phase A-B \uparrow	Mechanical Dimensions ³	WidthxHeightxDepth =440.0 mmx 218.0 mmx130.0 mm
Number of Measurements	Display 5 measurements at the same time	Weight ⁴	Without package 4.8 kg ± 0.2 kg With package 7.1 kg ± 1.0kg
Measurement Range	Screen Region or Cursor Region	 Adjustment Interval	The recommended calibration interval is one year.
Measurement Statistic	Average, Max, Min, Standard Deviation, Number of Measurements	Regulation Standards	
Counter	Hardware 6 bits counter (channels are selectable)	Electromagnetic Compatibility	2004/108/EC Execution standard EN 61326-1:2006 EN 61326-2-1:2006
 Math		Safety	UL 61010-1:2004; CAN/CSA-C22.2 NO. 61010-1-2004; EN 61010-1:2001; IEC 61010-1:2001
Waveform Operation	A+B, A-B, AxB, A/B, FFT, Editable Advanced Operation, Logic Operation		1. Maximum value. In single-channel mode, sine signal with 10 ns horizontal scale, 4 div input amplitude and 10 MHz frequency, edge trigger. 2. Typical. 3. Tilt tabs and handle folded, knob height included, front panel cover excluded. 4. DS4054 model, standard configuration.
FFT Window	Rectangle, Hanning, Blackman, Hamming		
FFT Display	Split, Full Screen		
FFT Vertical Scale	Linear RMS, dBV RMS		
Logic Operation	AND, OR, NOT, XOR		
Math Function	Intg, Diff, Log, Exp, Sqrt, Sine, Cosine, Tangent		
Number of Buses for Decoding	2		
Decoding Type	Parallel (standard), RS232 /UART (option), I2C (option), SPI (DS6XX4 option), CAN (option), FlexRay (option)		

► Ordering Information

	Description	Order Number
Model	DS4012 (100MHz, 2-channel)	DS4012
	DS4014 (100MHz, 4-channel)	DS4014
	DS4022 (200MHz, 2-channel)	DS4022
	DS4024 (200MHz, 4-channel)	DS4024
	DS4032 (350MHz, 2-channel)	DS4032
	DS4034 (350MHz, 4-channel)	DS4034
	DS4052 (500MHz, 2-channel)	DS4052
	DS4054 (500MHz, 4-channel)	DS4054
Standard Accessories	Power Cord conforming to the standard of the country	-
	Front Panel Cover	FPC-DS-4
	USB Data Cable	CB-USB-150
	2 or 4 Passive Probes (500 MHz)	RP3500
	Quick Guide	-
Optional Accessories	Resource CD (User's Guide and Application Software)	-
	Active Differential Probe (1.5 GHz)	RP7150
	Rack Mount Kit	RM-DS-4
Decoding Options	RS232/UART Decoding Kit	SD-RS232-DS4
	I2C Decoding Kit	SD-I2C-DS4
	SPI Decoding Kit	SD-SPI-DS4 (Only for DS4XX4)
	CAN Decoding Kit	SD-CAN-DS4
	FlexRay Decoding Kit	SD-FlexRay-DS4

NOTE: All the options or accessories can be ordered from your local RIGOL Office.