


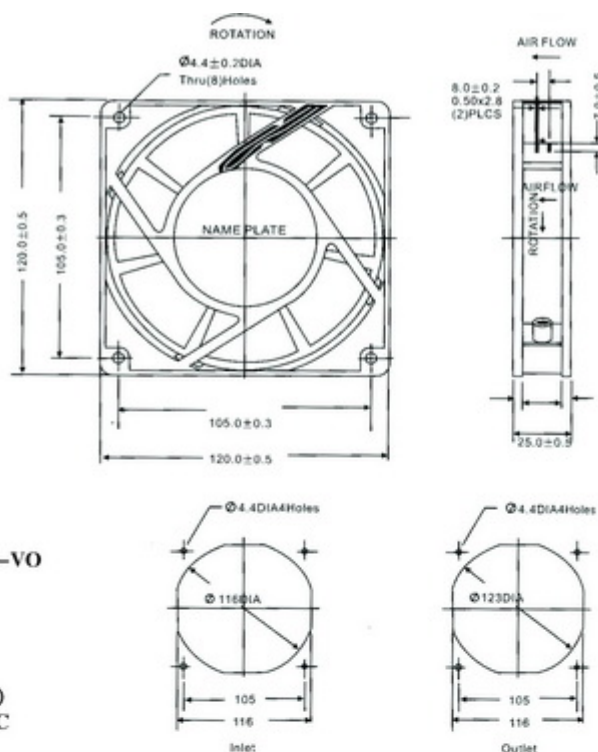

尺寸 Size: 120mmx120mmx25mm

风量 Airflow: 76~112m<sup>3</sup>/hr

45~66CFM

重量 Weight: 314g

噪音 Noise: 31~42dBA

风叶 Impeller: PBT Thermoplastic Black, UL94-V0

外框 Frame: Aluminum Alloy

端子 Terminals: 0.5mm

引线 Lead Wire: AWG#22 UL 1007(Optional)

马达 Motor: Shaded Pole Induction Motor

安规认证 Safety: UL > CUL > TUV > CE >

温度范围 Operation Temperature: -10°C ~ +65°C

| Model<br>(型号) | Bearing<br>System<br>(轴承型式) | Voltage<br>VAC<br>(电压) | Freq.<br>Hz<br>(频率) | Current<br>A<br>(电流) | Power<br>W<br>(功率) | Speed<br>RPM<br>(转速) | Noise<br>dBA<br>(噪音) | Air Flow (风量) |       | Phase<br>(相数) | Capacitor<br>(电容) |
|---------------|-----------------------------|------------------------|---------------------|----------------------|--------------------|----------------------|----------------------|---------------|-------|---------------|-------------------|
|               |                             |                        |                     |                      |                    |                      |                      | M3/hr         | CFM   |               |                   |
| G12025HA,S    | Sleeve                      | 100~125                | 50/60               | 0.25                 | 21                 | 2300/2700            | 39/42                | 96/112        | 57/66 | 1             | /                 |
| G12025HA,S    |                             | 200~240                | 50/60               | 0.13                 | 21                 | 2300/2700            | 39/42                | 96/112        | 57/66 | 1             | /                 |
| G12025HA,B    | Ball                        | 100~125                | 50/60               | 0.25                 | 21                 | 2300/2700            | 39/42                | 96/112        | 57/66 | 1             | /                 |
| G12025HA,B    |                             | 200~240                | 50/60               | 0.13                 | 21                 | 2300/2700            | 39/42                | 96/112        | 57/66 | 1             | /                 |
| G12025MA,S    | Sleeve                      | 100~125                | 50/60               | 0.16                 | 16                 | 1800/2300            | 31/36                | 76/95         | 45/56 | 1             | /                 |
| G12025MA,S    |                             | 200~240                | 50/60               | 0.08                 | 16                 | 1800/2300            | 31/36                | 76/95         | 45/56 | 1             | /                 |
| G12025MA,B    | Ball                        | 100~125                | 50/60               | 0.16                 | 16                 | 1800/2300            | 31/36                | 76/95         | 45/56 | 1             | /                 |
| G12025MA,B    |                             | 200~240                | 50/60               | 0.08                 | 16                 | 1800/2300            | 31/36                | 76/95         | 45/56 | 1             | /                 |

