



尺寸 Size:172mmx150mmx51mm

风量 Airflow:272~336m3/hr

160~198CFM

重量 Weight:860g

噪音 Noise:49~59dBA

风叶 Impeller: PBT Thermoplastic Black,UL94-V0

外框 Frame:Aluminum Alloy


端子 Terminals:0.5mm

引线 Lead Wire: AWG#22 UL 1015(Optional)



马达 Motor:Shaded Pole Induction Motor

安规认证 Safety: UL > CUL > TUV > CE >

温度范围 Operation Temperature:-10℃~+65℃

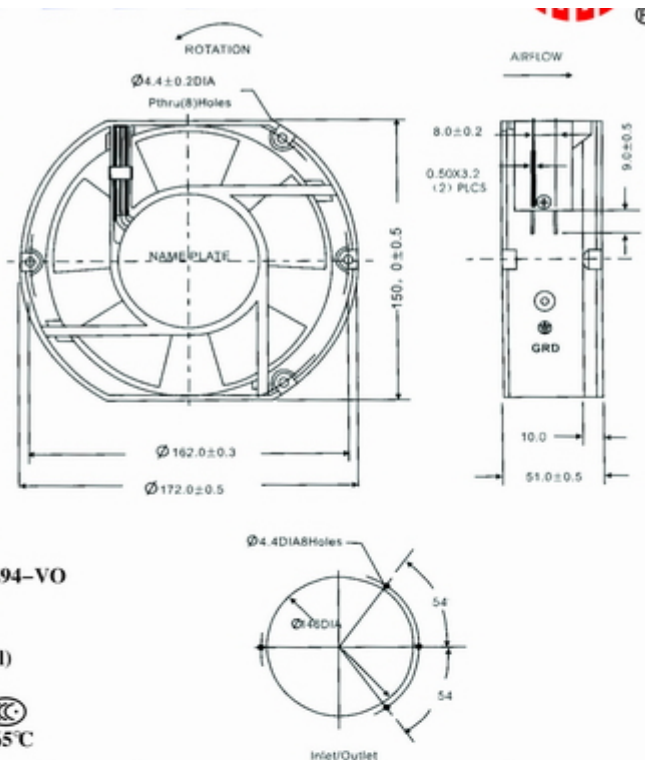

Model (型号)	Bearing System (轴承型式)	Voltage VAC (电压)	Freq. Hz (频率)	Current A (电流)	Power W (功率)	Speed RPM (转速)	Noise dBA (噪音)	Air Flow (风量)		Phase (相数)	Capacitor (电容)
								M3/hr	CFM		
G17050HA,S	Sleeve	100~125	50/60	0.4	38	2600/2900	54/59	299/336	176/198	1	—
G17050HA,S		200~240	50/60	0.22	38	2600/2900	54/59	299/366	176/198	1	—
G17050HA,S		380~420	50/60	0.12	38	2600/2900	54/59	299/366	176/198	1	—
G17050MA,S	Sleeve	100~125	50/60	0.35	35	2200/2600	49/54	272/300	160/176	1	—
G17050MA,S		200~240	50/60	0.19	35	2200/2600	49/54	272/300	160/176	1	—
G17050MA,S		380~420	50/60	0.12	35	2200/2600	49/54	272/300	160/176	1	—
G17050HA,B	Ball	100~125	50/60	0.4	38	2600/2900	54/59	299/336	176/198	1	—
G17050HA,B		200~240	50/60	0.22	38	2600/2900	54/59	299/336	176/198	1	—
G17050HA,B		380~420	50/60	0.12	38	2600/2900	54/59	299/336	176/198	1	—
G17050MA,B	Ball	100~125	50/60	0.35	35	2200/2600	49/54	272/300	160/176	1	—
G17050MA,B		200~240	50/60	0.19	35	2200/2600	49/54	272/300	160/176	1	—
G17050MA,B		380~420	50/60	0.12	35	2200/2600	49/54	272/300	160/176	1	—

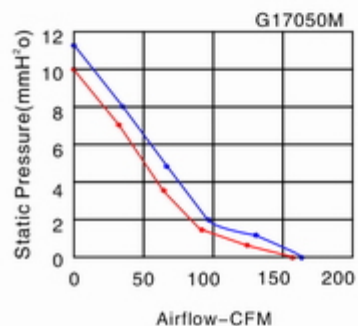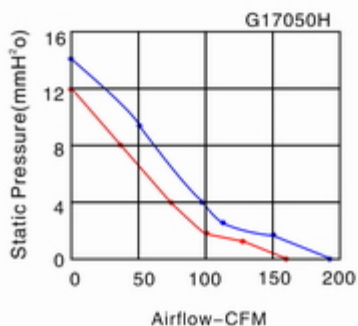

Key
— 60Hz
— 50Hz