



GS1A THRU GS1M

1.0 AMP. SURFACE MOUNT RECTIFIERS



FEATURES


- * For surface mounted application
- * Low forward voltage drop
- * High current capability
- * Easy pick and place
- * High surge current capability
- * Plastic material used carries Underwriters Laboratory classification 94V-0

MECHANICAL DATA

- * Case: Molded plastic
- * Terminals: Solder plated
- * Polarity: Indicated by cathode band
- * Packaging: 12mm tape per EIA STD RS-481
- * Weight: 0.091 gram

VOLTAGE RANGE
50 to 1000 Volts
CURRENT
1.0 Ampere

SMA/DO-214AC*

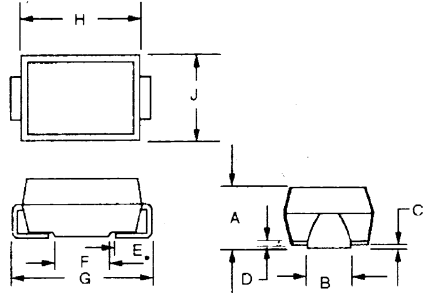

DIMENSIONS

	inches		mm	
	Min	Max	Min	Max
A	0.078(L)	0.116(L)	1.98(L)	2.95(L)
A	0.110(H)	0.117(H)	2.80(H)	2.98(H)
B	0.067	0.088	1.7	2.24
C		0.008		0.20
D		0.02		0.51
E	0.030	0.060	0.76	1.52
F	0.065	0.094	1.65	2.39
G	0.204	0.220	5.21	5.59
H	0.160	0.180	4.06	4.57
I	0.101	0.112	2.56	2.85

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%

TYPE NUMBER	SYMBOLS	GS1A	GS1B	GS1D	GS1G	GS1J	GS1K	GS1M	UNITS
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current @ $T_L = 75^\circ\text{C}$	$I_{F(AV)}$	1.0							A
Peak Forward Surge Current, 8.3 ms half sine	I_{FSM}	30							A
Maximum Instantaneous Forward Voltage @ 1.0A	V_F	1.1							V
Maximum D. C Reverse Current @ $T_A = 25^\circ\text{C}$ at Rated D. C. Blocking Voltage @ $T_A = 100^\circ\text{C}$	I_R	5.0							μA
		50							μA
Maximum Reverse Recovery Time (Note 1)	T_{rr}	1.8							μS
Typical Junction Capacitance (Note 2)	C_J	8							pF
Operating Temperature Range	T_J	-55 to +150							$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 to +150							$^\circ\text{C}$

NOTES: 1. Reverse Recovery Test Conditions: $I_F = 0.5\text{A}$, $I_R = 1.0\text{A}$, $I_{RR} = 0.25\text{A}$
2. Measured at 1 MHz and applied $V_R = 4.0$ volts D. C.

RATINGS AND CHARACTERISTIC CURVES (GS1A THRU GS1M)

FIG. 1 - FORWARD CURRENT DERATING CURVE

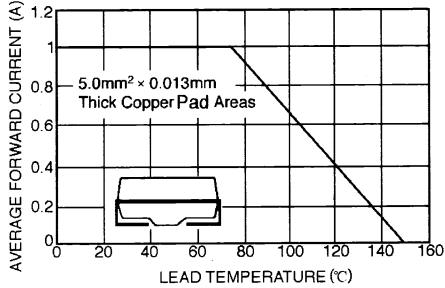


FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

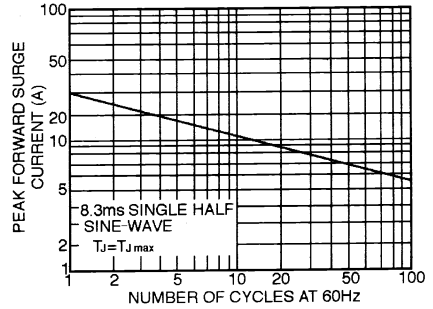


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

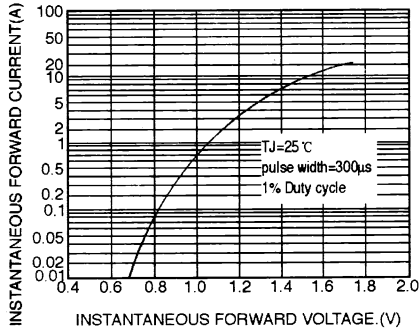


FIG. 4 - TYPICAL JUNCTION CAPACITANCE


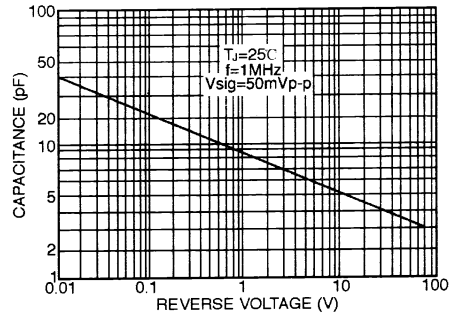


FIG. 5 - TYPICAL REVERSE CHARACTERISTICS

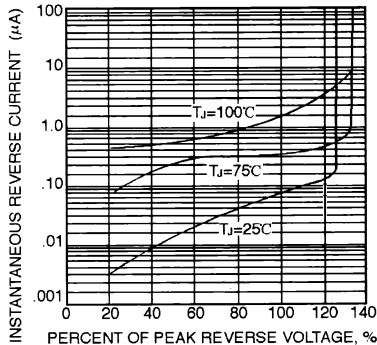

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.