

HH-SW78F008W12-3528



Features:

1. Available in single colors: white, warm white.
2. DC12V, 24V, 78leds/m, 9.4w/m, with brown, white and black background.
3. Cuttable every 3LEDs along the cutting marks, pack in reel, 5m/reel in normal, different length is available.
4. With 3M tape in the back, very simple to install at any surfaces.
5. No ultraviolet and infrared radiation, low heat-release, long lifetime for 50,000hs.
6. No dark space and with 120° view angle.
7. CE and RoHS are approved.




Application: hotel, market, KTV, decorative lights for holiday, event, show, exhibition. DIY light for home using. Backlight or edge lighting for sign, etc.

Waterproof type



IP65 (glue) IP67 (silicone tube) IP68 (PVC tube+glue) Ip68 (half silicone tube+ silicone glue)

Dimensions

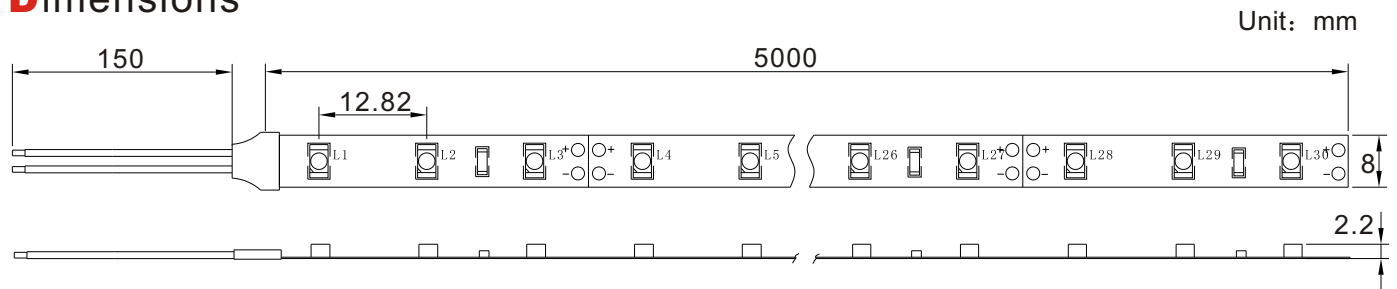


Characteristics

| Part Number | LED Type | LED Q'ty | CCT Range | λd(nm)/Tc(K) | Flux | Max Power | Lifetime | Size(mm) |
|----------------------|--------------|----------|------------|--------------|------|-----------|----------|----------|
| HH-SWW78F008W12-3528 | Super Bright | 390pcs | Warm White | 2500-3500 | 3000 | 31.5W | 30000 | 5000*8 |
| HH-SW78F008W12-3528 | SMD 3528 | 390pcs | Pure White | 6000-7500 | 3500 | 31.5W | 30000 | 5000*8 |

HH-SW78F008W12-3528


Connection Diagram

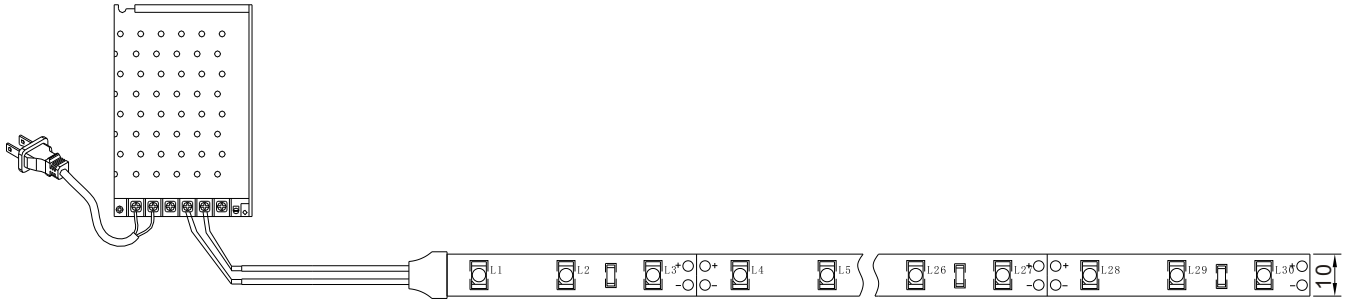

Installation Guide



Product Parts

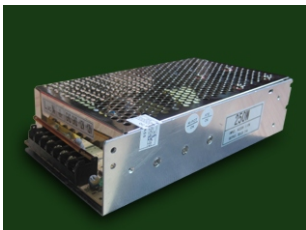


Package



H1: 5m/roll



H2: 100m/carton



H3: 400m/carton

Notes:

1. Please check the power supply before using, make sure the exact standards.
2. Please keep the total power of the driving LED strips less than 80% of the rated power from power supply.