


SPECIFICATION

CUSTOMER: E c o m

DATE: 1 6 t h . M a y . , 2 0 0 1


PART NO.	SUMIDA TYPE P-5DJ	SAMPLE NO. 4164-T038
----------	-------------------	----------------------

1. DIMENSION (UNIT mm)

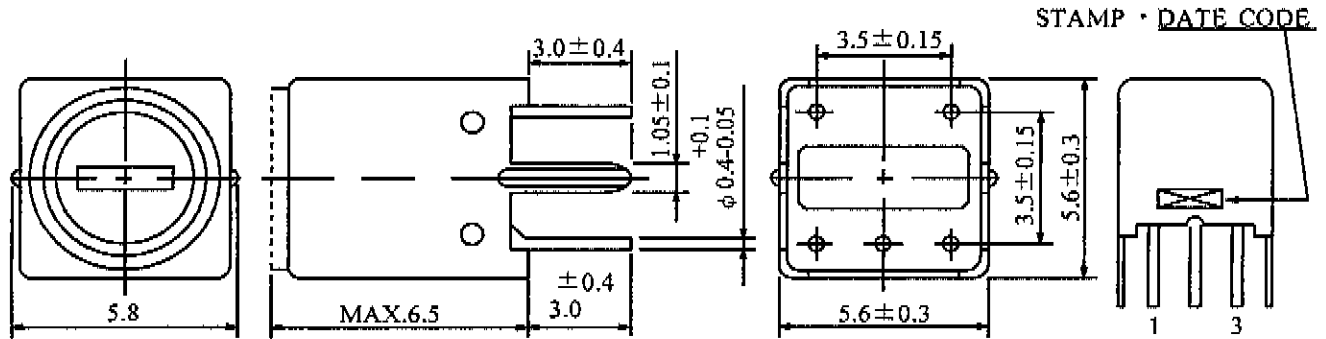

- * DIMENSION WITHOUT TOLERANCE ARE APPROX.
- * DIMENSION DOES NOT INCLUDE SOLDER USED ON COIL.
- * TERMINAL PITCH IS MEASURED AT THE BASE. (NOT FROM TIP OF THE PIN.)

2. CONNECTION (BOTTOM)



"S" IS WINGING START

3. TURNS, WIRE AND CORE

PIN No.	1-3	-	-	-
TURN	4 5 T	T	T	T
WIRE	0.06UEW			
D. CORE	D 3 B OR EQUIVALENT			
C. CORE	Q 1 C OR EQUIVALENT			

4. ELECTRICAL CHARACTERISTICS

	(1 - 3)	MEASURING FREQUENCY
1. INDUCTANCE	4 9 μH ± 5 % VARIABLE	2 . 5 2 M H z
2. UNLOADED Q	M I N . 8 5	2 . 5 2 M H z
3. INDUCTANCE	4 7 μH (R e f .)	7 0 0 k H z

5. NOTE

REVISIONS

①	
②	

CHK	CHK	DRG
zhu	zhao	zheng
yuan	xiaojun	weidong

@