

Specification Status: RELEASED

Electrical Rating

Voltage: 16V MAX
Current: 100A MAX

Insulating Material:

Cured, Flame Retarded Epoxy Polymer
meets UL94 V-0 Requirements

Lead Material:

20 AWG Tin/Lead Plated Copper
(0.81mm [0.032] nom. diameter)

Marking:

- Raychem Logo and Voltage
- ⊗ 16 — Part Identification
- G 400 — Lot Identification (can be on back)
- □ □ □ — Lot Identification (can be on back)

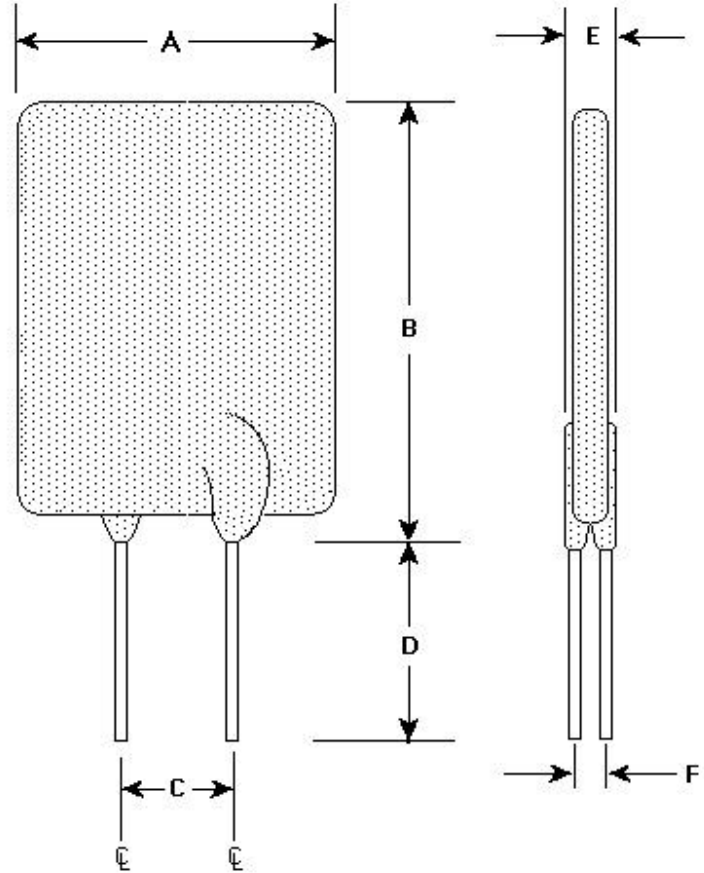


TABLE I. DIMENSIONS:

	A		B		C		D		E		F
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	TYP
mm:	7.9	8.9	7.9	12.8	4.3	5.8	7.6	-	2.0	3.0	1.2
in*:	(0.31)	(0.35)	(0.31)	(0.50)	(0.17)	(0.23)	(0.30)	-	(0.08)	(0.12)	(0.05)

*Rounded off approximation

TABLE II. PERFORMANCE RATINGS:

I HOLD 25°C HOLD	CURRENT RATINGS		TIME TO TRIP SECONDS AT 25°C, 20 A MAX	RESISTANCE OHMS AT 25°C		TRIPPED-STATE POWER DISSIPATION WATTS AT 25°C, 16V TYP
	AMPS HOLD	AMPS AT 25°C TRIP		MIN	MAX	
4.0	4.0	6.8	1.7	0.021	0.060	2.4

Recognitions: CSA/ TUV/ UL approved.
Reference Documents: PS300
Precedence: This specification takes precedence over documents referenced herein.
Effectivity: Reference documents shall be the issue in effect on the date of invitation for bid.
CAUTION: Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.