

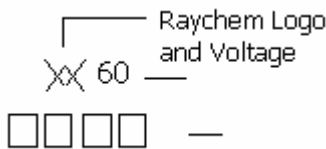
Specification Status: Released

Electrical Rating

Voltage: 60V MAX
Current: 40A MAX

Insulating Material:
 Cured, Flame Retardant Epoxy Polymer
 meets UL94 V-0 Requirements

Lead Material:
 26 AWG Tin Plated Nickel-Copper Alloy

Marking:


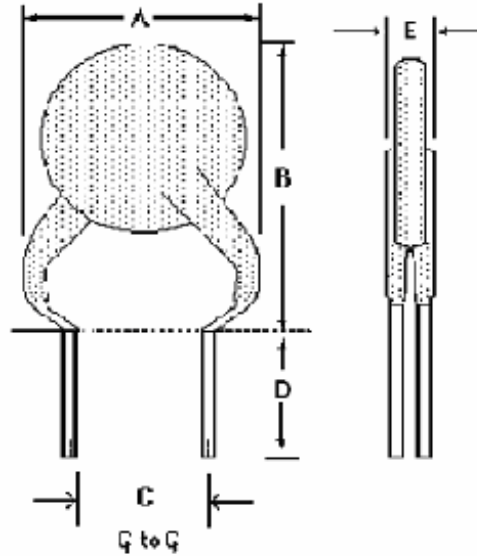


TABLE I. DIMENSIONS:

| | A | | B | | C | | D | | E | |
|------|-----|--------|-----|--------|--------|--------|--------|-----|-----|--------|
| | MIN | MAX | MIN | MAX | MIN | MAX | MIN | MAX | MIN | MAX |
| mm: | -- | 8.0 | -- | 8.3 | 4.3 | 5.8 | 7.6 | -- | -- | 3.0 |
| in*: | -- | (0.32) | -- | (0.33) | (0.17) | (0.23) | (0.30) | -- | -- | (0.12) |

*Rounded off approximation

TABLE II. PERFORMANCE RATINGS:

| I HOLD RATED CURRENT | CURRENT RATINGS | | INITIAL RESISTANCE VALUES | | TIME TO TRIP | ONE HOUR POST-TRIP RESISTANCE STANDARD TRIP | TRIPPED- STATE POWER DISSIPATION |
|----------------------------|----------------------------|-----------------------------------|---------------------------------|------|--------------|---|---|
| | AMPERES AT 20°C HOLD | AMPERES AT 20°C HOLD TRIP | OHMS AT 20°C MIN MAX | | | | |
| 0.05 | 0.05 | 0.10 | 7.3 | 11.1 | 5.0 | 20.0 | 0.22 |

Agency Recognitions: UL, CSA, TUV
 Reference Documents: PS300
 Precedence: This specification takes precedence over documents referenced herein.
 Effectivity: Reference documents shall be the issue in effect on the date of invitation for bid.
 CAUTION: Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.

Materials Information

ROHS Compliant ELV Compliant Pb-Free

Directive 2002/95/EC
 Compliant

Directive 2000/53/EC
 Compliant

