SPECIFICATION

PART NO.	SUMIDA TYPE S－7GD	SAMPLE NO. 0237－T158

1. DIMENSION (UNIT mm)

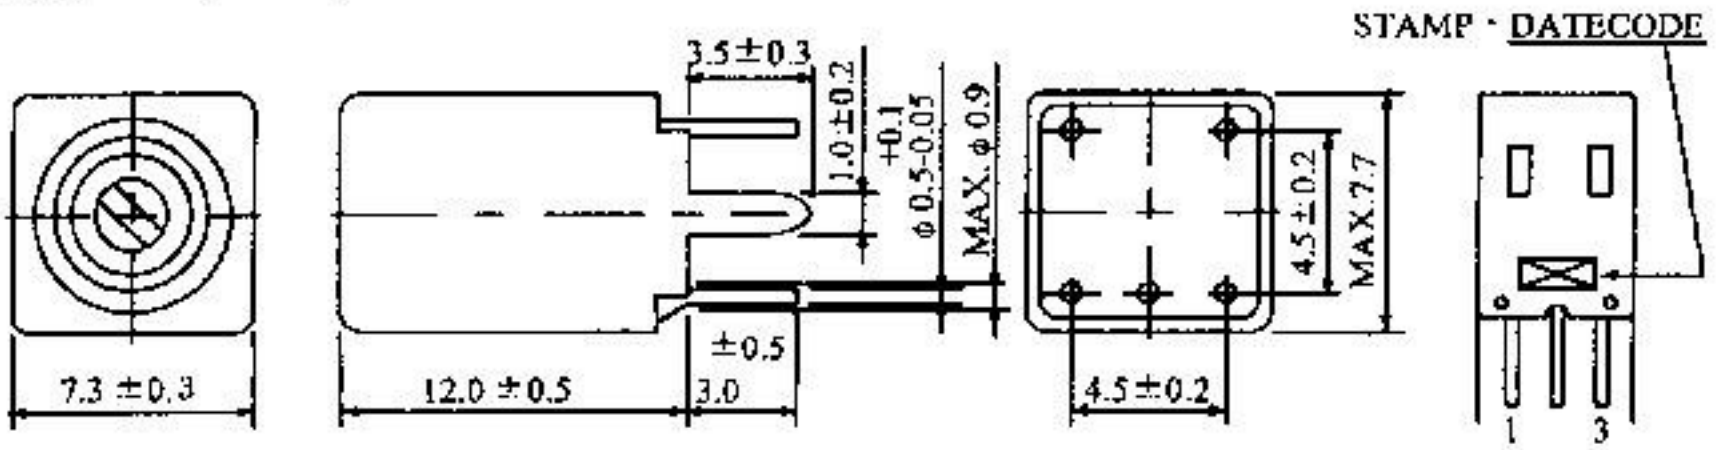

* DIMENSION DOES NOT INCLUDE SOLDER USED ON COIL.
* TERMINAL PITCH IS MEASURED AT THE BASE. (NOT FROM TIP OF THE PIN.)

2. CONNECTION (BOTTOM)

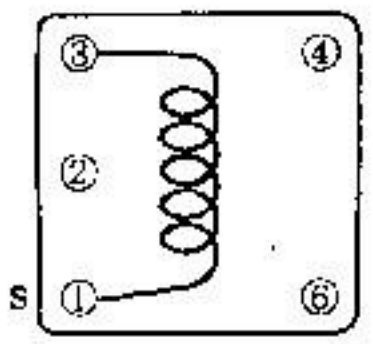

"S" IS WINGING START

3. TURNS, WIRE AND CORE

PIN No.	1－3	－	－	－
TURNS	6 T	T	T	T
WIRE	0.12UEW			
S. CORE	M5N OR EQUIVALENT			
P. CORE	M5N OR EQUIVALENT			

4. ELECTRICAL CHARACTERISTICS

	(1－3)	MEASURING FREQUENCY
1. INDUCTANCE	0.3μH±4% VARIABLE	25.2MHz
2. UNLOADED Q	MIN. 50	25.2MHz
3. CAPACITY	———	———

5. NOTE

□REVISIONS

①
②

CHK	CHK	DRG
Zhengyuan	/	Zheng Weibing

SUMIDA TECHNOLOGIES INCORPORATED