



Звонки магнитоэлектрические без генератора SMT-G5030A

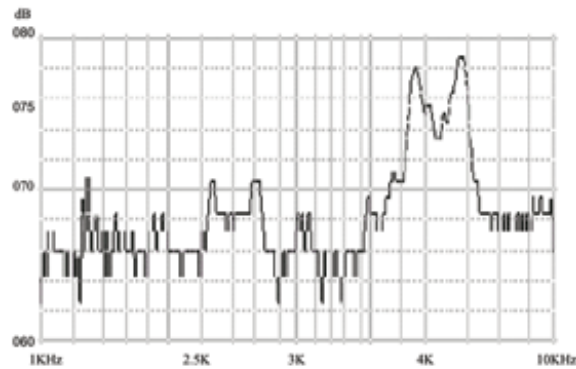

Product ID	SMT-G5030A
Rated Voltage	3.0V
Operating Voltage	2.5~4.0V
Max. Rated Current	100mA/3.0V
Min.Sound Pressure Level	78dB/3.0v/10cm
Coil Resistance	12 ±3 Ω
Coil Impedance	30 Ω
Resonant Frequency	4000Hz
Operating Temperature	-30~+70°C
DIM.DxHxL	5.0X5.0mm
Weight	0.1g

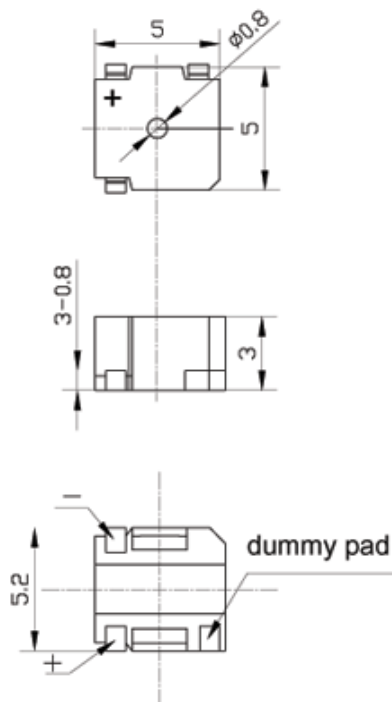

all dimensions are in mm