


Tantalum Capacitor, 220 uF, 20% Tol, 6.3V @85C, D Case, Molded, Standard Profile, Ultra Low ESR

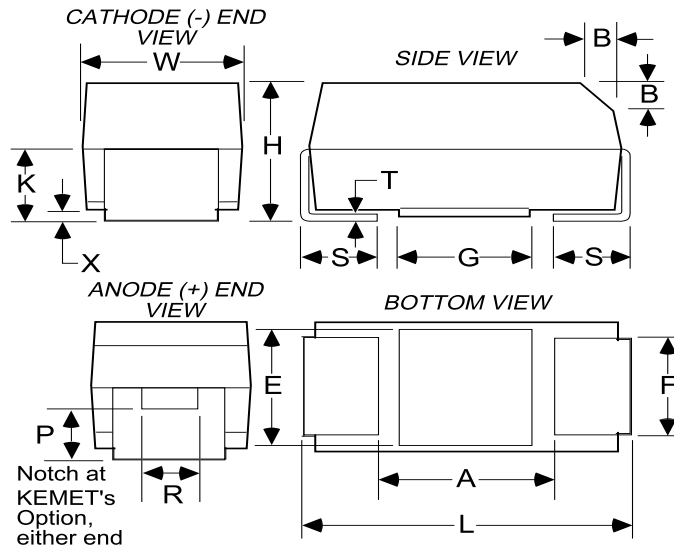

Dimensional Data (mm)

Specifications

ID	Dimensions	Tolerance	Application:	Low ESR
L:	7.30	+/-0.30	Capacitance:	220 uF
W:	4.30	+/-0.30	Tolerance:	20%
H:	2.80	+/-0.30	Voltage DC @ 85C:	6.3V
K:	1.50	+/-0.20	Voltage DC @ 105C:	6.3V
F:	2.40	+/-0.10	Temperature Range:	-55/+105C
S:	1.30	+/-0.30	Size Code:	D
B:	0.50	+/-0.15	Footprint:	7343
X:	0.10	ref	Body Type:	Molded Chip
P:	0.90	ref	Packaging:	T&R
R:	1.00	ref	Package Quantity:	500
T:	0.13	ref	Termination Type:	Tin (Pb free)
A:	3.80	ref	Leakage Current:	139 uA
G:	3.50	ref	Dissipation Factor:	0.1%
E:	3.50	ref	ESR:	50 mOhm
			Ripple @ 25C:	2.1 A
			Ripple @ 85C:	2.1 A
			Ripple @ 105C:	2.1 A

