

**PRODUCT :**        **TFT TOUCH MODULE**

**MODULE NO. :**    **WKS50WV003-WCT**

**SUPPLIER:**        **WKS Technology Co., LTD**

**DATE:**             **Sep 8, 2019**

# ***SPECIFICATION***

*Revision: 0.1*

**WKS50WV003-WCT**

*This module uses ROHS material*

*This specification may change without prior notice in order to improve performance or quality. Please contact WKS R&D department for updated specification and product status before design for this product or release of this order.*

<b>WRITTEN BY</b>	<b>CHECKED BY</b>	<b>APPROVED BY</b>
<i>Jason</i>	<i>Tim</i>	<i>Henry</i>




## **CONTENTS**

- 1、GENERAL INFORMATION**
- 2、EXTERNAL DIMENSIONS**
- 3、ABSOLUTE MAXIMUM RATINGS**
- 4、ELECTRICAL CHARACTERISTICS**
- 5、BACKLIGHT CHARACTERISTICS**
- 6、CTP CHARACTERISTICS**
- 7、ELECTRO-OPTICAL CHARACTERISTICS**
- 8、INTERFACE DESCRIPTION**
- 9、INPUT TIMING**
- 10、RELIABILITY TEST CONDITIONS**
- 11、INSPECTION CRITERION**

## 1、GENERAL INFORMATION

<i>Item of general information</i>	<i>Contents</i>		<i>Unit</i>
<i>LCD Display Size (Diagonal)</i>	5.0		<i>inch</i>
<i>Module Structure</i>	<i>LCD Display + CTP Touch + PCB</i>		-
<i>LCD Display Type</i>	<i>TFT/TRANSMISSIVE</i>		-
<i>LCD Display Mode</i>	<i>Normally White</i>		-
<i>Recommended Viewing Direction</i>	12		<i>o'clock</i>
<i>Gray inversion Direction</i>	6		<i>o'clock</i>
<i>Module size (W×H×T)</i>	136.00×76.05×7.27		<i>mm</i>
<i>Active area (W×H)</i>	108.00×64.80		<i>mm</i>
<i>Number of pixels (Resolution)</i>	800RGB×480		<i>pixel</i>
<i>Pixel pitch (W×H)</i>	0.135×0.135		<i>mm</i>
<i>Color Pixel Arrangement</i>	<i>RGB Stripe</i>		-
<i>LCD Driver IC</i>	-		-
<i>Module Interface Type</i>	<i>LCD</i>	<i>LVDS Interface(6bit)</i>	-
	<i>CTP</i>	<i>I2C interface</i>	-
<i>Module Input voltage</i>	5.0V		<i>V</i>
<i>Module Power consumption</i>	-		<i>mW</i>
<i>Color Numbers</i>	65K		-
<i>Backlight Type</i>	<i>White LED</i>		-

## 2、EXTERNAL DIMENSIONS

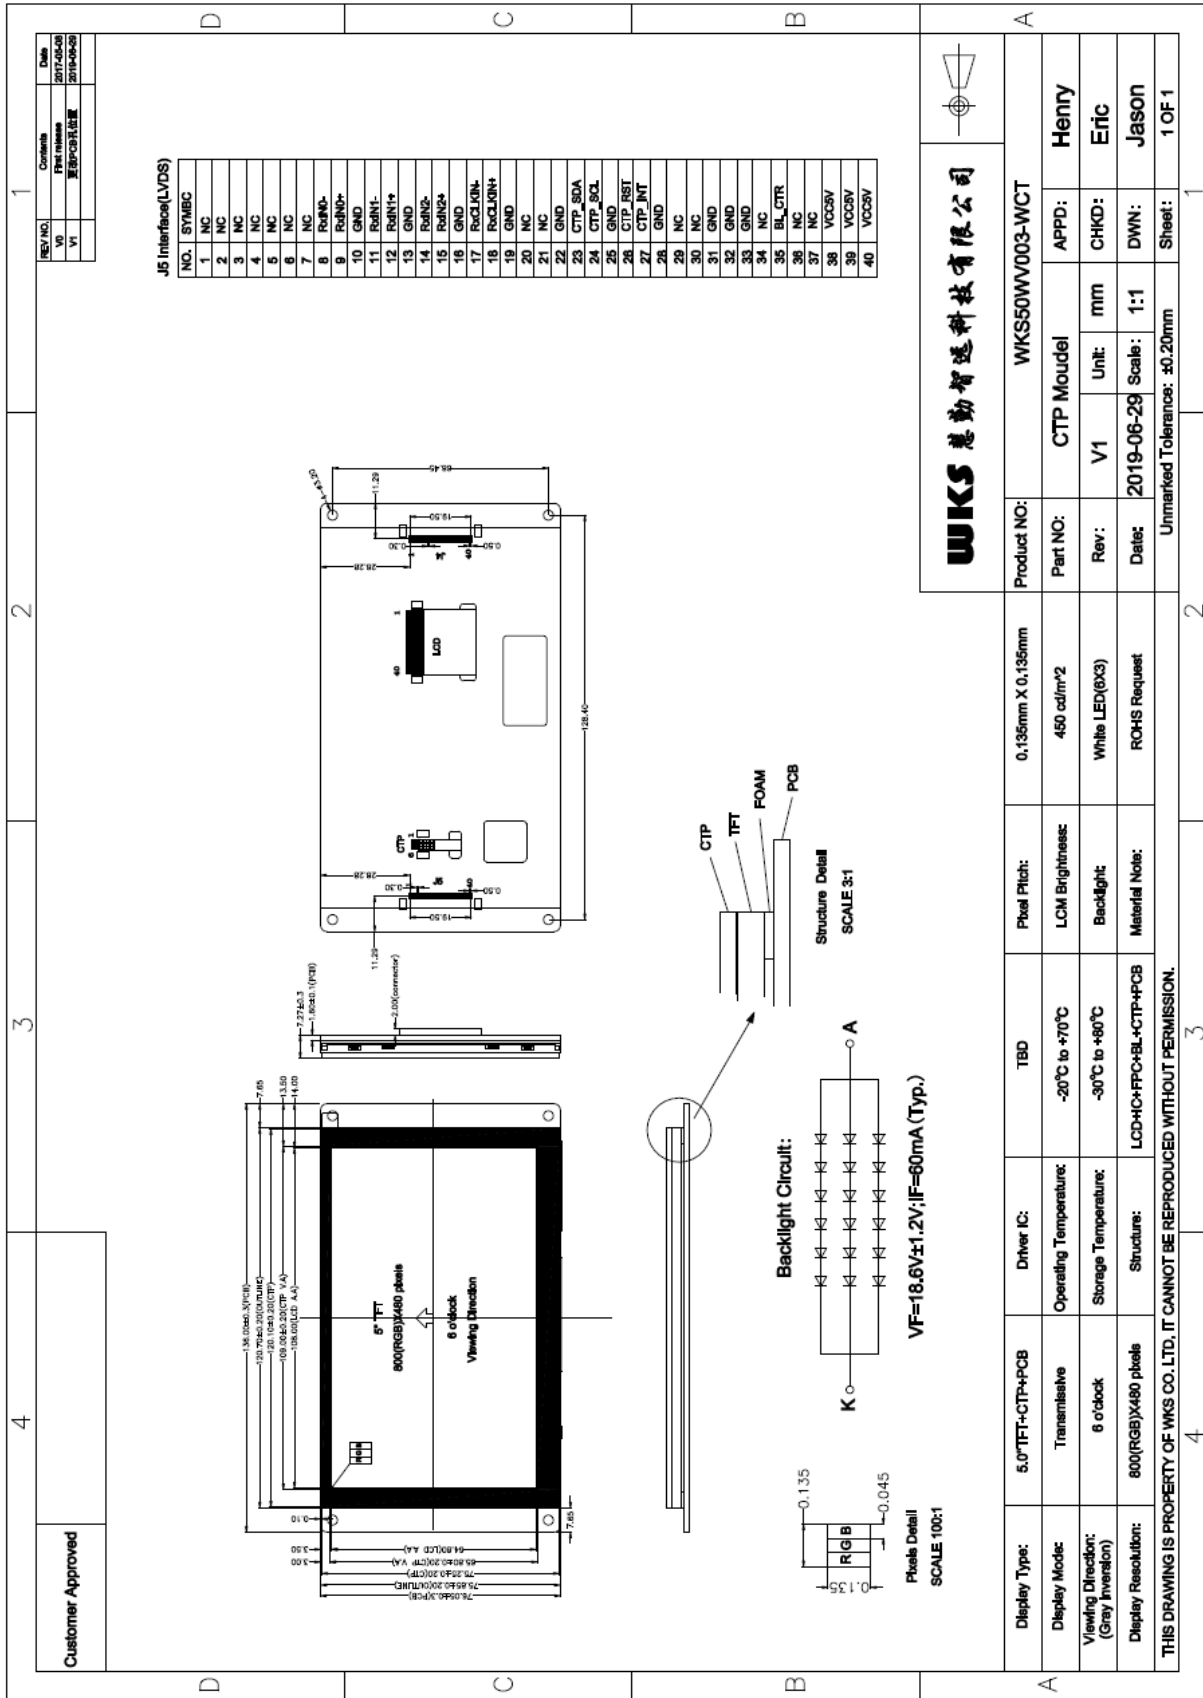

### 3、ABSOLUTE MAXIMUM RATINGS

<i>Parameter of absolute maximum ratings</i>	<i>Symbol</i>	<i>Min</i>	<i>Max</i>	<i>Unit</i>
<i>Operating temperature</i>	<i>T<sub>op</sub></i>	-20	70	℃
<i>Storage temperature</i>	<i>T<sub>st</sub></i>	-30	80	℃
<i>Humidity</i>	<i>RH</i>	-	90%(Max 60℃)	RH

*Note: Absolute maximum ratings means the product can withstand short-term, not more than 120 hours. If the product is a long time to withstand these conditions, the life time would be shorter.*

### 4、ELECTRICAL CHARACTERISTICS(DC CHARACTERISTICS)


<i>Parameter of DC characteristics</i>	<i>Symbol</i>	<i>Min.</i>	<i>Typ.</i>	<i>Max.</i>	<i>Unit</i>
<i>PCB operating voltage</i>	<i>VCC5V</i>	-	5.0	-	V
<i>LCD I/O operating voltage</i>	<i>VDD</i>	2.3	3.3	3.6	V
<i>Input voltage 'H' level</i>	<i>V<sub>IH</sub></i>	0.7*VDD	-	VDD	V
<i>Input voltage 'L' level</i>	<i>V<sub>IL</sub></i>	VSS	-	0.3*VDD	V
<i>Output voltage 'H' level</i>	<i>V<sub>OH</sub></i>	VDD-0.4	-	VDD	V
<i>Output voltage 'L' level</i>	<i>V<sub>OL</sub></i>	VSS	-	VSS+0.4	V

## 5、BACKLIGHT CHARACTERISTICS

<i>Item of backlight characteristics</i>	<i>Symbol</i>	<i>Min.</i>	<i>Typ.</i>	<i>Max.</i>	<i>Unit</i>	<i>Remark</i>
<i>Forward Voltage</i>	<i>V<sub>f</sub></i>	17.4	18.6	19.8	V	Note1
<i>Forward Current</i>	<i>I<sub>f</sub></i>	-	60	-	mA	-
<i>Number of LED</i>	-	-	6*3=18	-	Piece	-
<i>LED Connection mode</i>	P/S	-	Serial/Parallel	-	-	-
<i>Lifetime of LED</i>	-	-	10000	-	hour	Note2

Note:

- Note1: The LED Supply Voltage is defined by the number of LED at  $T_a=25\text{ }^\circ\text{C}$  and  $I_f=60\text{mA}$ .
- Note2: The LED lifetime define as the estimated time to 50% degradation of initial luminous. The LED lifetime could be decreased if operating  $I_f$  is lager than 60mA.
- Backlight control via the BL\_CTR pin or PWM signal.
- Backlight circuit:

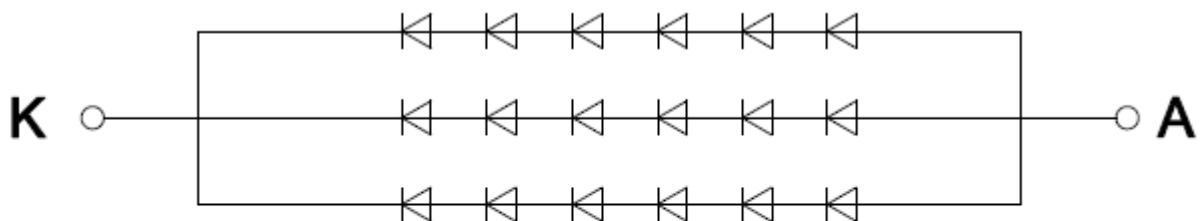

$$V_F=18.6V\pm 1.2V; I_F=60\text{mA (Typ.)}$$

## 6、CTP CHARACTERISTICS

<i>Item of CTP characteristics</i>	<i>Specification</i>	<i>Unit</i>	<i>Remark</i>
<i>Panel Type</i>	<i>Glass Cover + Glass Sensor</i>	-	-
<i>Resolution</i>	<i>800 × 480</i>	<i>pixel</i>	-
<i>Surface Hardness</i>	<i>6H</i>	-	-
<i>Transparency</i>	<i>≥82%</i>	-	-
<i>Driver IC</i>	<i>GT5688</i>	-	-
<i>Interface Type</i>	<i>I2C</i>	-	-
<i>Support Points</i>	<i>5</i>	-	-
<i>Sampling Rate</i>	<i>20~100</i>	<i>Hz</i>	-
<i>Supply voltage</i>	<i>3.3</i>	<i>V</i>	-

## 7、ELECTRO-OPTICAL CHARACTERISTICS

Item of electro-optical characteristics		Symbol	Condition	Min.	Typ.	Max.	Unit	Remark	Note
Response time		$Tr+Tf$	$\theta=0$ $\phi=0$ $Ta=25\text{ }^{\circ}\text{C}$	-	20	-	ms	FIG 1.	4
Contrast Ratio		CR		-	450	-	-	FIG 2.	1
Luminance uniformity		$\delta\text{WHITE}$		-	80	-	%	FIG 2.	3
Surface Luminance		$Lv$		-	350	-	cd/m <sup>2</sup>	FIG 2.	2
CIE (x, y) chromaticity	White	White x	$\theta=0$ $\phi=0$ $Ta=25\text{ }^{\circ}\text{C}$	-	0.317	-	-	FIG 2.	5
		White y		-	0.324	-			
	Red	Red x		-	0.633	-			
		Red y		-	0.341	-			
	Green	Green x		-	0.324	-			
		Green y		-	0.551	-			
	Blue	Blue x		-	0.153	-			
		Blue y		-	0.143	-			
Viewing angle range	$\phi=90$ (12 o'clock)		CR $\geq 10$	-	50	-	deg	FIG 3.	6
	$\phi=270$ (6 o'clock)			-	60	-	deg		
	$\phi=0$ (3 o'clock)			-	65	-	deg		
	$\phi=180$ (9 o'clock)			-	65	-	deg		
NTSC ratio		-	-	-	50	-	%	-	-

**Note 1.** Contrast Ratio(CR) is defined mathematically by the following formula. For more information see FIG 2.:

$$\text{Contrast Ratio(CR)} = \frac{\text{Average Surface Luminance with all white pixels(P1,P2,P3,P4,P5,P6,P7,P8,P9)}}{\text{Average Surface Luminance with all black pixels(P1,P2,P3,P4,P5,P6,P7,P8,P9)}}$$

**Note 2.** Surface luminance is the LCD surface from the surface with all pixels displaying white. For more information see FIG 2.

$Lv$ =Average Surface Luminance with all white pixels (P1,P2,P3,P4,P5,P6,P7,P8,P9)

**Note 3.** The uniformity in surface luminance ( $\delta\text{WHITE}$ ) is determined by measuring

luminance at each test position 1 through 9, and then dividing the maximum luminance of 9 points luminance by minimum luminance of 9 points luminance. For more information see FIG 2.

$$\delta_{\text{WHITE}} = \frac{\text{Minimum Surface Luminance with all white pixels (P1, P2, P3, P4, P5, P6, P7, P8, P9)}}{\text{Maximum Surface Luminance with all white pixels (P1, P2, P3, P4, P5, P6, P7, P8, P9)}}$$

**Note 4.** Response time is the time required for the display to transition from White to black (Rise Time,  $T_r$ ) and from black to white (Decay Time,  $T_f$ ). For additional information see FIG 1.


**Note 5.** CIE (x, y) chromaticity, The x,y value is determined by screen active area position 5. For more information see FIG 2.

**Note 6.** Viewing angle is the angle at which the contrast ratio is greater than a specific value. For TFT module, the specific value of contrast ratio is 10. The angles are determined for the horizontal or x axis and the vertical or y axis with respect to the z axis which is normal to the LCD surface. For more information see FIG 3.

**Note 7.** For Viewing angle and response time testing, the testing data is base on Autronic-Melchers's ConoScope. Series Instruments. For contrast ratio, Surface Luminance, Luminance uniformity and CIE, the testing data is base on BM-7 photo detector.

**Note 8.** For TN type TFT transmissive module, Gray scale reverse occurs in the direction of panel viewing angle.

**FIG.1. The definition of Response Time**

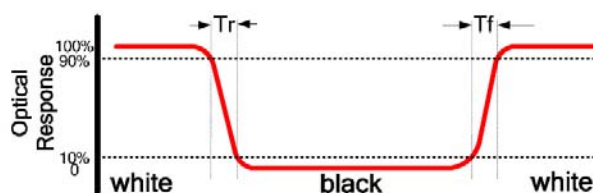

**FIG.2. Measuring method for Contrast ratio, surface luminance, Luminance uniformity,**


**CIE (x, y) chromaticity**

A : H/6 ;


B : V/6 ;

H,V : Active Area(AA) size

Measurement instrument: BM-7; Light spot size=5mm, 350mm distance from the LCD surface to detector lens.

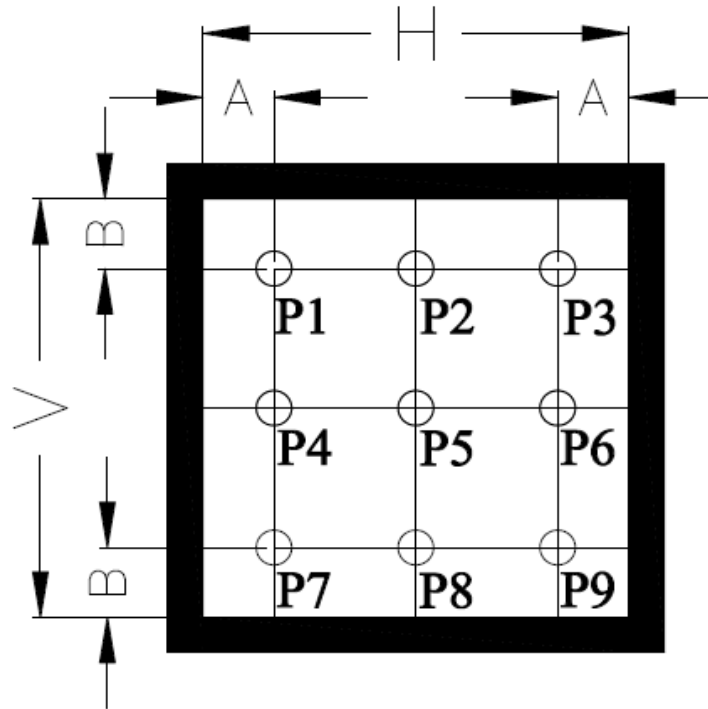

**FIG.3. The definition of viewing angle**

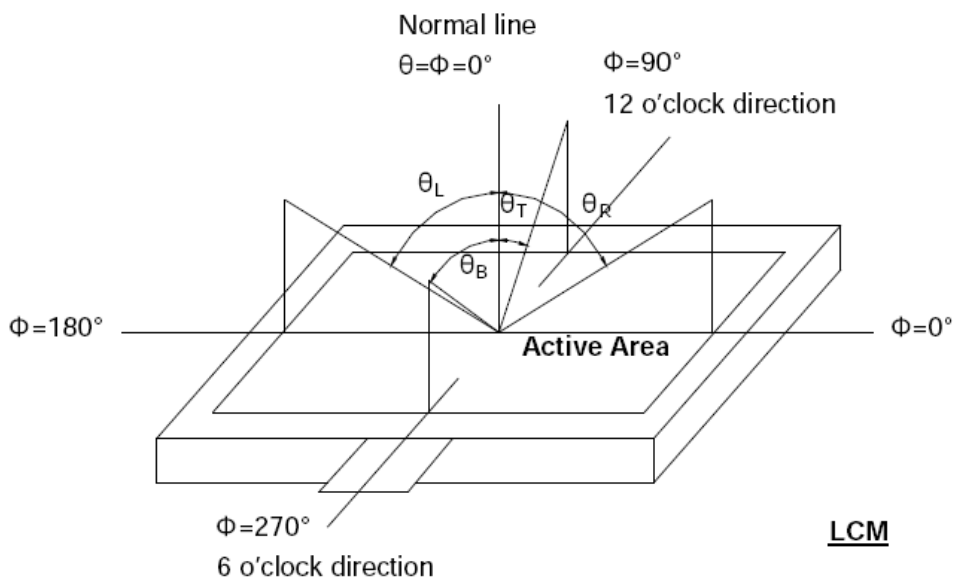

## 8、INTERFACE DESCRIPTION


NO.	Symbol	I/O	DESCRIPTION	Remark
1~7	NC	-	No connection	
8	RXIN0-	I	-LVDS Differential Data Input	R2~R7,G2
9	RXIN0+	I	+LVDS Differential Data Input	
10	GND	Power supply	Power ground	
11	RXIN1-	I	-LVDS Differential Data Input	G3~G7,B2,B3
12	RXIN1+	I	+LVDS Differential Data Input	
13	GND	Power supply	Power ground	
14	RXIN2-	I	-LVDS Differential Data Input	B4~B7,HS,VS,DE
15	RXIN2+	I	+LVDS Differential Data Input	
16	GND	Power supply	Power ground	
17	RXCLKIN-	I	-LVDS Differential Clock Input	LVDS CLK
18	RXCLKIN+	I	+LVDS Differential Clock Input	
19	GND	Power supply	Power ground	
20~21	NC	-	No connection	
22	GND	Power supply	Power ground	
23	CTP_SDA	I/O	CTP I2C data input and output	
24	CTP_SCL	I	CTP I2C clock input	
25	GND	Power supply	Power ground	
26	CTP_RST	I	CTP external reset signal, Low is active	
27	CTP_INT	I	CTP External interrupt to the host	
28	GND	Power supply	Power ground	
29~30	NC	-	No connection	
31~33	GND	Power supply	Power ground	
34	NC	-	No connection	
35	BL_CTR	I	Backlight control pin	
36~37	NC	-	No connection	
38~40	VCC5V	Power supply	Module Power supply (5V Typ.)	

## 9、INPUT TIMING

**LCD Timing Table**

Parameter	Symbol	Value			Unit
		Min.	Typ.	Max.	
DCLK frequency@ Frame rate=60Hz	DCLK	-	30	50	MHz
Horizontal display area	thd	800			DCLK
1 Horizontal Line	th	-	928	-	DCLK
HSYNC pulse width	thpw	1	48	-	DCLK
HSYNC Back Porch(Blanking)	thb	-	88	-	DCLK
HSYNC Front Porch	thfp	-	40	-	DCLK
Vertical display area	tvd	480			H
VSYNC period time	tv	-	525	-	H
VSYNC pulse width	tvpw	-	3	-	H
VSYNC Back Porch(Blanking)	tvb	-	32	-	H
VSYNC Front Porch	tvfp	-	13	-	H

**LVDS Data Input Format**

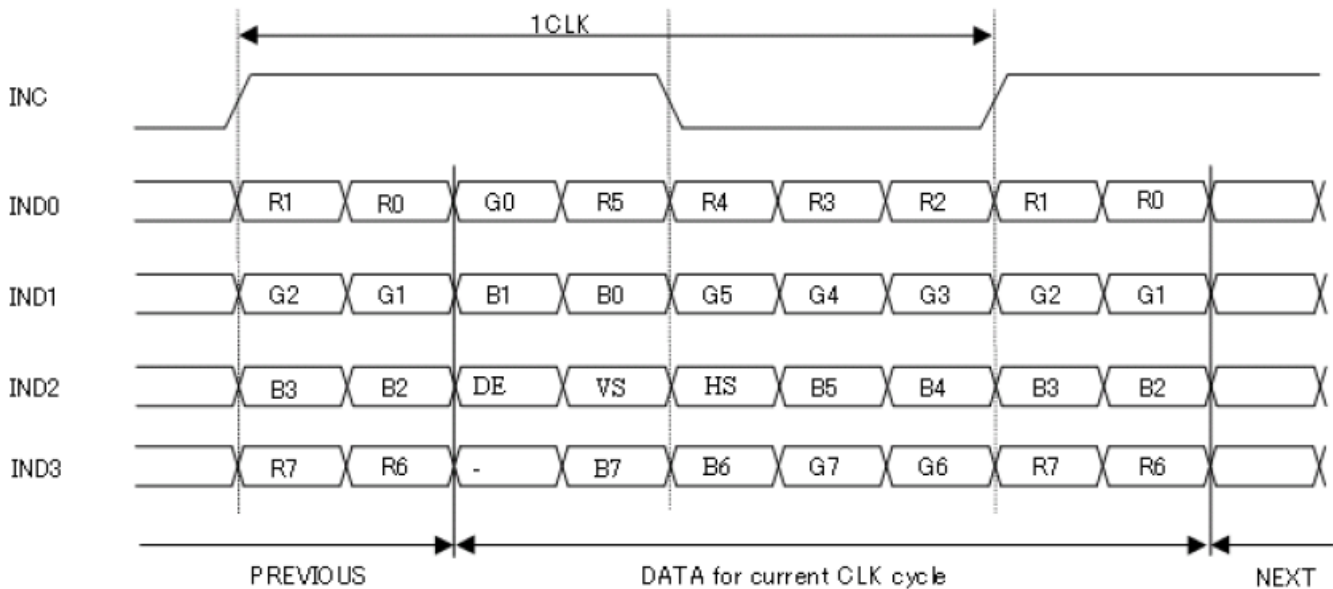

## 10、RELIABILITY TEST CONDITIONS

No.	Test Item	Test Condition
1	High Temperature Storage	80 °C/120 hours
2	Low Temperature Storage	-30 °C/120 hours
3	High Temperature Operating	70 °C/120 hours
4	Low Temperature Operating	-20 °C/120 hours
5	Temperature Cycle Storage	-20 °C(30min.)~25(5min.)~70 °C(30min.)×10cycles

### A、Inspection after test:

Inspection after 2~4 hours storage at room temperature, the sample shall be free from defects:

- Air bubble in the LCD;
- Sealleak;
- Non-display;
- Missing segments;
- Glass crack;
- Current is twice higher than initial value.

### B、Remark:

- The test samples should be applied to only one test item.
- Sample size for each test item is 5~10pcs.
- Failure Judgment Criterion: Basic Specification, Electrical Characteristic, Mechanical Characteristic, Optical Characteristic.

## 11、INSPECTION CRITERION

*This specification is made to be used as the standard of acceptance/rejection criteria for TFT-LCD/IPS TFT-LCD module product, and this specification is applicable only in the case that the size of module equal to or exceed than 4.3 inch.*

### 11.1 Sample plan

*Sampling plan according to GB/T2828.1-2003/ISO 2859-1: 1999 and ANSI/ASQC*

*Z1.4-1993,normal level 2 and based on:*

*Major defect: AQL 0.65*


*Minor defect: AQL 1.5*

### 11.2 Inspection condition

*Viewing distance for cosmetic inspection is about 30cm with bare eyes, and under an environment of 20~40W light intensity, all directions for inspecting the sample should be within 45° against perpendicular line. (Normal temperature 20~25 °C and normal humidity 60 ±15%RH)*

### 11.3 Definition of Inspection Item.

*A、 Definition of inspection zone in LCD.*

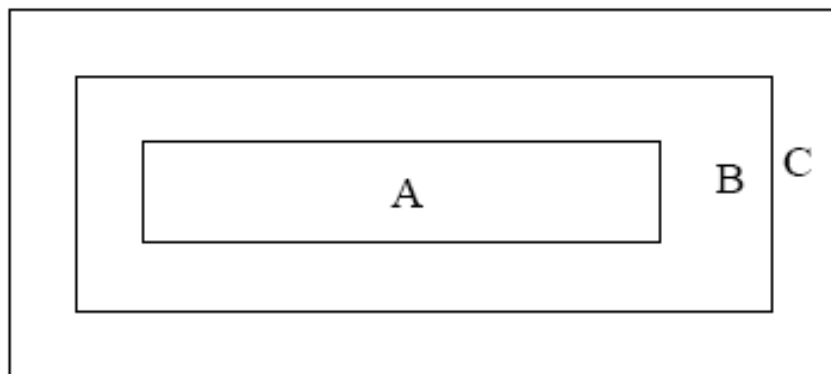

*Zone A: character/Digit area*

*Zone B: viewing area except Zone A (Zone A + Zone B=minimum Viewing area)*

*Zone C: Outside viewing area (invisible area after assembly in customer's product)*

*Fig.1 Inspection zones in an LCD*

*Note: As a general rule, visual defects in Zone C are permissible, when it is no trouble for quality and assembly of customer's product.*


### **B、 Definition of some visual defect**

<i>Bright dot</i>	<i>Because of losing all or part function, bad pixel dots appear bright and the size is more than 50% of one dot in which LCD panel is displaying under black pattern.</i>
<i>Dark dot</i>	<i>Dots appear dark and unchanged in size in which LCD panel is displaying under pure red, green, blue picture, or pure whiter picture.</i>




### **11.4 Major Defect**

<i>Item No.</i>	<i>Items to be inspected</i>	<i>Inspection standard</i>	<i>Classification of defects</i>
<i>1</i>	<i>Functional defects</i>	<i>1) No display 2) Display abnormally 3) Missing vertical, horizontal segment 4) Short circuit 5) Excess power consumption 6) Backlight no lighting, flickering and abnormal lighting</i>	<i>major</i>
<i>2</i>	<i>Missing</i>	<i>Missing component</i>	
<i>3</i>	<i>Outline dimension</i>	<i>Overall outline dimension beyond the drawing is not allowed</i>	

5、Minor Defect

Item No.	Items to be inspected	Inspection standard					Classification of defects																																						
1	Bright dot /dark dot defect	<table border="1"> <thead> <tr> <th colspan="2" data-bbox="448 510 786 645" rowspan="2">Zone</th> <th colspan="3" data-bbox="786 510 1238 555">Acceptable Qty</th> <th data-bbox="1238 510 1251 902" rowspan="2">C</th> </tr> <tr> <th colspan="3" data-bbox="786 555 1238 600">A+B</th> </tr> <tr> <th colspan="2" data-bbox="448 600 786 645"></th> <th data-bbox="786 600 906 645">4.3~7"</th> <th data-bbox="906 600 1034 645">7~10.1"</th> <th data-bbox="1034 600 1238 645">&gt;10.1"</th> <th data-bbox="1238 600 1251 902" rowspan="6">Acceptable</th> </tr> </thead> <tbody> <tr> <td data-bbox="448 645 555 689">Bright pixel dot</td> <td data-bbox="555 645 786 689"></td> <td data-bbox="786 645 906 689">1</td> <td data-bbox="906 645 1034 689">2</td> <td data-bbox="1034 645 1238 689">3</td> </tr> <tr> <td data-bbox="448 689 555 734">Dark pixel dot</td> <td data-bbox="555 689 786 734"></td> <td data-bbox="786 689 906 734">4</td> <td data-bbox="906 689 1034 734">4</td> <td data-bbox="1034 689 1238 734">4</td> </tr> <tr> <td data-bbox="448 734 555 779">2bright dots adjacent</td> <td data-bbox="555 734 786 779"></td> <td data-bbox="786 734 906 779">0</td> <td data-bbox="906 734 1034 779">0</td> <td data-bbox="1034 734 1238 779">0</td> </tr> <tr> <td data-bbox="448 779 555 824">2dark dots adjacent</td> <td data-bbox="555 779 786 824"></td> <td data-bbox="786 779 906 824">0</td> <td data-bbox="906 779 1034 824">0</td> <td data-bbox="1034 779 1238 824">0</td> </tr> <tr> <td data-bbox="448 824 555 902">Total bright and dark dots</td> <td data-bbox="555 824 786 902"></td> <td data-bbox="786 824 906 902">5</td> <td data-bbox="906 824 1034 902">6</td> <td data-bbox="1034 824 1238 902">7</td> </tr> </tbody> </table>		Zone		Acceptable Qty			C	A+B					4.3~7"	7~10.1"	>10.1"	Acceptable	Bright pixel dot		1	2	3	Dark pixel dot		4	4	4	2bright dots adjacent		0	0	0	2dark dots adjacent		0	0	0	Total bright and dark dots		5	6	7		Minor
Zone		Acceptable Qty				C																																							
		A+B																																											
		4.3~7"	7~10.1"	>10.1"	Acceptable																																								
Bright pixel dot		1	2	3																																									
Dark pixel dot		4	4	4																																									
2bright dots adjacent		0	0	0																																									
2dark dots adjacent		0	0	0																																									
Total bright and dark dots		5	6	7																																									
<p>Note: Minimum distance between defective dots is more than 5mm; Pixel dots' function is normal, but bright dots caused by foreign material and other reasons are judged by the dot defect of 5.2.</p>																																													
2	<p>Dot defect</p>  <p><math>\Phi = (x+y) / 2</math></p>	<table border="1"> <thead> <tr> <th colspan="2" data-bbox="448 1025 786 1160" rowspan="2">Zone</th> <th colspan="3" data-bbox="786 1025 1238 1070">Acceptable Qty</th> <th data-bbox="1238 1025 1251 1350" rowspan="2">C</th> </tr> <tr> <th colspan="3" data-bbox="786 1070 1238 1115">A+B</th> </tr> <tr> <th colspan="2" data-bbox="448 1115 786 1160">Size(mm)</th> <th data-bbox="786 1115 906 1160">4.3"~7"</th> <th data-bbox="906 1115 1034 1160">7~10.1"</th> <th data-bbox="1034 1115 1238 1160">&gt;10.1"</th> <th data-bbox="1238 1115 1251 1350" rowspan="4">Acceptable</th> </tr> </thead> <tbody> <tr> <td data-bbox="448 1160 555 1227"><math>\Phi \leq 0.2</math></td> <td data-bbox="555 1160 786 1227"></td> <td data-bbox="786 1160 906 1227">Acceptable</td> <td data-bbox="906 1160 1034 1227">Acceptable</td> <td data-bbox="1034 1160 1238 1227">Acceptable</td> </tr> <tr> <td data-bbox="448 1227 555 1294"><math>0.2 &lt; \Phi \leq 0.5</math></td> <td data-bbox="555 1227 786 1294"></td> <td data-bbox="786 1227 906 1294">4</td> <td data-bbox="906 1227 1034 1294">5</td> <td data-bbox="1034 1227 1238 1294">6</td> </tr> <tr> <td data-bbox="448 1294 555 1350"><math>\Phi &gt; 0.5</math></td> <td data-bbox="555 1294 786 1350"></td> <td data-bbox="786 1294 906 1350">0</td> <td data-bbox="906 1294 1034 1350">0</td> <td data-bbox="1034 1294 1238 1350">0</td> </tr> </tbody> </table>		Zone		Acceptable Qty			C	A+B			Size(mm)		4.3"~7"	7~10.1"	>10.1"	Acceptable	$\Phi \leq 0.2$		Acceptable	Acceptable	Acceptable	$0.2 < \Phi \leq 0.5$		4	5	6	$\Phi > 0.5$		0	0	0		Minor										
Zone		Acceptable Qty				C																																							
		A+B																																											
Size(mm)		4.3"~7"	7~10.1"	>10.1"	Acceptable																																								
$\Phi \leq 0.2$		Acceptable	Acceptable	Acceptable																																									
$0.2 < \Phi \leq 0.5$		4	5	6																																									
$\Phi > 0.5$		0	0	0																																									
<p>Note: 1. Minimum distance between defective dots is more than 5 mm; 2. The quantity of defect is zero in operating condition.</p>																																													
3	Linear defect	<table border="1"> <thead> <tr> <th colspan="2" data-bbox="448 1514 786 1648" rowspan="2">Zone</th> <th colspan="3" data-bbox="786 1514 1238 1559">Acceptable Qty</th> <th data-bbox="1238 1514 1251 1939" rowspan="2">C</th> </tr> <tr> <th colspan="3" data-bbox="786 1559 1238 1603">A+B</th> </tr> <tr> <th data-bbox="448 1603 555 1648">Length</th> <th data-bbox="555 1603 786 1648">Width</th> <th data-bbox="786 1603 906 1648">4.3"~7"</th> <th data-bbox="906 1603 1034 1648">7~10.1"</th> <th data-bbox="1034 1603 1238 1648">&gt;10.1"</th> <th data-bbox="1238 1603 1251 1939" rowspan="4">Acceptable</th> </tr> </thead> <tbody> <tr> <td data-bbox="448 1648 555 1715">Ignore</td> <td data-bbox="555 1648 786 1715"><math>W \leq 0.05</math></td> <td data-bbox="786 1648 906 1715">Acceptable</td> <td data-bbox="906 1648 1034 1715">Acceptable</td> <td data-bbox="1034 1648 1238 1715">Acceptable</td> </tr> <tr> <td data-bbox="448 1715 555 1783"><math>L \leq 5.0</math></td> <td data-bbox="555 1715 786 1783"><math>0.05 &lt; W \leq 0.1</math></td> <td data-bbox="786 1715 906 1783">4</td> <td data-bbox="906 1715 1034 1783">5</td> <td data-bbox="1034 1715 1238 1783">6</td> </tr> <tr> <td data-bbox="448 1783 555 1939"><math>L &gt; 5.0</math></td> <td data-bbox="555 1783 786 1939"><math>W &gt; 0.1</math></td> <td data-bbox="786 1783 906 1939">0</td> <td data-bbox="906 1783 1034 1939">0</td> <td data-bbox="1034 1783 1238 1939">0</td> </tr> </tbody> </table>		Zone		Acceptable Qty			C	A+B			Length	Width	4.3"~7"	7~10.1"	>10.1"	Acceptable	Ignore	$W \leq 0.05$	Acceptable	Acceptable	Acceptable	$L \leq 5.0$	$0.05 < W \leq 0.1$	4	5	6	$L > 5.0$	$W > 0.1$	0	0	0		Minor										
Zone		Acceptable Qty				C																																							
		A+B																																											
Length	Width	4.3"~7"	7~10.1"	>10.1"	Acceptable																																								
Ignore	$W \leq 0.05$	Acceptable	Acceptable	Acceptable																																									
$L \leq 5.0$	$0.05 < W \leq 0.1$	4	5	6																																									
$L > 5.0$	$W > 0.1$	0	0	0																																									

4	Polarizer defect	<p>5.4.1 Polarizer Position</p> <p>(i) Shifting in position should not exceed the glass outline dimension.</p> <p>(ii) Incomplete covering of the viewing area due to shifting is not allowed.</p> <p>5.4.2 Dirt on polarizer</p> <p>Dirt which can be wiped easily should be acceptable.</p> <p>5.4.3 Polarizer Dent &amp; Air bubble</p> <table border="1"> <thead> <tr> <th colspan="2" rowspan="2">Zone</th> <th colspan="3">Acceptable Qty</th> <th rowspan="2">C</th> </tr> <tr> <th colspan="3">A+B</th> </tr> <tr> <th colspan="2">Size(mm)</th> <th>4.3"~7"</th> <th>7~10.1"</th> <th>&gt;10.1"</th> <th rowspan="4">Acceptable</th> </tr> </thead> <tbody> <tr> <td colspan="2"><math>\Phi \leq 0.2</math></td> <td>Acceptable</td> <td>Acceptable</td> <td>Acceptable</td> </tr> <tr> <td colspan="2"><math>0.2 &lt; \Phi \leq 0.5</math></td> <td>4</td> <td>5</td> <td>6</td> </tr> <tr> <td colspan="2"><math>\Phi &gt; 0.5</math></td> <td>0</td> <td>0</td> <td>0</td> </tr> </tbody> </table> <p>5.4.4 Polarizer scratch</p> <p>(i) If the polarizer scratch can be seen after cover assembling or in the operating condition, judge by the linear defect of 5.3.</p> <p>(ii) If the polarizer scratch can be seen only in non-operating condition or some special angle, judge by the following:</p> <table border="1"> <thead> <tr> <th colspan="2" rowspan="2">Zone</th> <th colspan="3">Acceptable Qty</th> <th rowspan="2">C</th> </tr> <tr> <th colspan="3">A+B</th> </tr> <tr> <th>Length</th> <th>Width</th> <th>4.3"~7"</th> <th>7~10.1"</th> <th>&gt;10.1"</th> <th rowspan="4">Acceptable</th> </tr> </thead> <tbody> <tr> <td>Ignore</td> <td><math>W \leq 0.05</math></td> <td>Acceptable</td> <td>Acceptable</td> <td>Acceptable</td> </tr> <tr> <td><math>1.0 &lt; L \leq 5.0</math></td> <td><math>0.05 &lt; W \leq 0.20</math></td> <td>4</td> <td>5</td> <td>6</td> </tr> <tr> <td><math>L &gt; 5.0</math></td> <td><math>W &gt; 0.2</math></td> <td>0</td> <td>0</td> <td>0</td> </tr> </tbody> </table>	Zone		Acceptable Qty			C	A+B			Size(mm)		4.3"~7"	7~10.1"	>10.1"	Acceptable	$\Phi \leq 0.2$		Acceptable	Acceptable	Acceptable	$0.2 < \Phi \leq 0.5$		4	5	6	$\Phi > 0.5$		0	0	0	Zone		Acceptable Qty			C	A+B			Length	Width	4.3"~7"	7~10.1"	>10.1"	Acceptable	Ignore	$W \leq 0.05$	Acceptable	Acceptable	Acceptable	$1.0 < L \leq 5.0$	$0.05 < W \leq 0.20$	4	5	6	$L > 5.0$	$W > 0.2$	0	0	0	Minor
		Zone			Acceptable Qty				C																																																						
A+B																																																															
Size(mm)		4.3"~7"	7~10.1"	>10.1"	Acceptable																																																										
$\Phi \leq 0.2$		Acceptable	Acceptable	Acceptable																																																											
$0.2 < \Phi \leq 0.5$		4	5	6																																																											
$\Phi > 0.5$		0	0	0																																																											
Zone		Acceptable Qty			C																																																										
		A+B																																																													
Length	Width	4.3"~7"	7~10.1"	>10.1"	Acceptable																																																										
Ignore	$W \leq 0.05$	Acceptable	Acceptable	Acceptable																																																											
$1.0 < L \leq 5.0$	$0.05 < W \leq 0.20$	4	5	6																																																											
$L > 5.0$	$W > 0.2$	0	0	0																																																											
5	MURA	Using 3% ND filter, it's NG if it can be seen in R,G,B picture.	Minor																																																												
	White/Black dot (MURA)	Visible under: ND3%; $D \leq 0.15mm$ , Acceptable; $0.15mm < D \leq 0.5mm$ , $N \leq 4$ ; $D > 0.5mm$ , Not allowable.																																																													

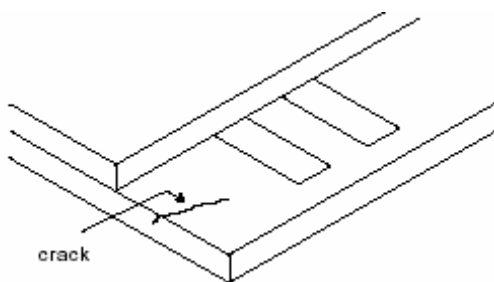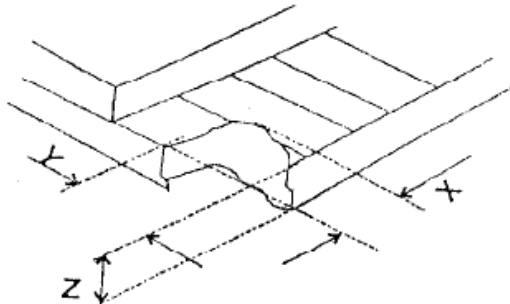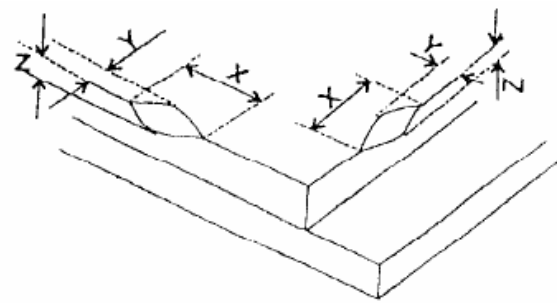6	Glass defect	<p>(i) Crack Cracks are not allowed.</p> 	Minor								
		<p>(ii) TFT chips on corner</p>  <table border="1" style="width: 100%; text-align: center;"> <thead> <tr> <th>X</th> <th>Y</th> <th>Z</th> <th>Acceptable</th> </tr> </thead> <tbody> <tr> <td><math>\leq 3.0</math></td> <td><math>\leq 3.0</math></td> <td>Not more than the thickness of glass</td> <td><math>N \leq 3</math></td> </tr> </tbody> </table> <p>Chips on the corner of terminal shall not be allowed to extend into the ITO pad or expose perimeter seal.</p>	X	Y	Z	Acceptable	$\leq 3.0$	$\leq 3.0$	Not more than the thickness of glass	$N \leq 3$	Minor
		X	Y	Z	Acceptable						
$\leq 3.0$	$\leq 3.0$	Not more than the thickness of glass	$N \leq 3$								
<p>(iii) Usual surface crack</p>  <table border="1" style="width: 100%; text-align: center;"> <thead> <tr> <th>X</th> <th>Y</th> <th>Z</th> <th>Acceptable</th> </tr> </thead> <tbody> <tr> <td><math>\leq 1.5</math></td> <td><math>\leq 1.5</math></td> <td>Not more than the thickness of glass</td> <td><math>N \leq 4</math></td> </tr> </tbody> </table> <p>It is only applicable to the upper glass of LCD.</p>	X	Y	Z	Acceptable	$\leq 1.5$	$\leq 1.5$	Not more than the thickness of glass	$N \leq 4$	Minor		
X	Y	Z	Acceptable								
$\leq 1.5$	$\leq 1.5$	Not more than the thickness of glass	$N \leq 4$								

## 11.6 Module Cosmetic Criteria

Item No.	Items to be inspected	Inspection Standard	Classification of defects
1	Difference in Spec.	Not allowable	Major
2	Pattern peeling	No substrate pattern peeling and floating	Major
3	Soldering defects	No soldering missing	Major
		No soldering bridge	Major
		No cold soldering	Minor
4	Resist flaw on PCB	Visible copper foil ( $\Phi 0.5$ mm or more) on substrate pattern is not allowed	Minor
5	FPC gold finger	No dirt, breaking, oxidation lead to black	Major
6	Backlight plastic frame	No deformation, crack, breaking, backlight positioning column breaking, obvious nick.	Minor
7	Marking printing effect	No dark marking, incomplete, deformation lead to unable to judge	Minor
8	Accretion of metallic Foreign matter	No accretion of metallic foreign matter (Not exceed $\Phi 0.2$ mm)	Minor
9	Stain	No stain to spoil cosmetic badly	Minor
10	Plate discoloring	No plate fading, rusting and discoloring	Minor
11	1. Lead parts	a. Soldering side of PCB Solder to form a 'Filet' all around the lead. Solder should not hide the lead form perfectly.	Minor
		b. Components side(In case of 'Through Hole PCB') Solder to reach the Components side of PCB.	Minor
	2. Flat packages	Either 'Toe'(A) or 'Seal'(B)of the lead to be covered by "Filet". Lead form to be assume over Solder.	Minor
	3. Chips	$(3/2) H \geq h \geq (1/2) H$	Minor
4. Solder ball/Solder splash	a. The spacing between solder ball and the conductor or solder pad $h \geq 0.13$ mm. The diameter of solder ball $d \leq 0.15$ mm.	Minor	
	b. The quantity of solder balls or solder splashes isn't beyond 5 in 600 mm <sup>2</sup> .	Minor	
	c. Solder balls/Solder splashes do not violate minimum electrical clearance.	Major	

