


# Power Metal Strip® Resistors, Low Value, Surface Mount



## FEATURES

- Ideal for all types of current sensing, voltage division and pulse applications including switching and linear power supplies, instruments, power amplifiers
- Proprietary processing technique produces extremely low resistance values
- All welded construction
- Solid metal Nickel-chrome or Manganese-copper alloy resistive element with lowTCR (< 20 ppm/°C)
- Solderable terminations
- Very low inductance 0.5nH to 5nH
- Excellent frequency response
- Low thermal EMF
- Lead (Pb)-Free version is RoHS Compliant

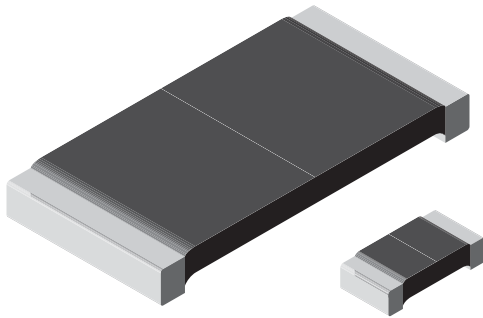

RoHS\* COMPLIANT

STANDARD ELECTRICAL SPECIFICATIONS				
GLOBAL MODEL	POWER RATING P <sub>70°C</sub> W	RESISTANCE RANGE Ω		WEIGHT (TYPICAL) g/1000 pcs
		± 0.5%	± 1.0%	
WSL0603	0.1	0.015 - 0.1	0.015 - 0.1	1.9
WSL0805	0.125	0.01 - 0.2	0.01 - 0.2	4.8
WSL1206	0.25	0.01 - 0.2	0.002 - 0.2	16.2
WSL2010	0.5	0.01 - 0.5	0.001 - 0.5	38.9
WSL2512	1.0*	0.01 - 0.5	0.001 - 0.5	63.6
WSL2816	2.0	0.01 - 0.10	0.01 - 0.10	118

\*For values above 0.1Ω derate linearly to 80% rated power at 0.5Ω

• Part Marking: DALE, Value, Tolerance: due to resistor size limitations some resistors will be marked with only the resistance value.

TECHNICAL SPECIFICATIONS		
PARAMETER	UNIT	WSL RESISTOR CHARACTERISTICS
Temperature Coefficient	ppm/°C	± 275 for 1mΩ to 2.9mΩ, ± 150 for 3mΩ to 4.9mΩ ± 110 for 5mΩ to 6.9mΩ, ±75 for 7mΩ to 0.5Ω
Operating Temperature Range	°C	- 65 / + 170
Maximum Working Voltage	V	(P x R) <sup>1/2</sup>

### GLOBAL PART NUMBER INFORMATION

New Global Part Numbering: WSL25124L000FEA (preferred part numbering format)

W	S	L	2	5	1	2	4	L	0	0	0	F	E	A		
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	--	--

**GLOBAL MODE**  
(See Standard Electrical Specifications, Global Model, for more options).

**VALUE**  
L = Milliohm\*  
R = Decimal  
4L000 = 0.004Ω  
R0100 = 0.01Ω  
\* use "L" for resistance values <.01Ω

**TOLERANCE CODE**  
D = ± 0.5%  
F = ± 1.0%  
J = ± 5.0%

**PACKAGING**  
EA = Lead (Pb)-Free, Tape/Reel  
EK = Lead (Pb)-Free, Bulk  
TA = Tin/Lead, Tape/Reel (R86)  
TG = Tin/Lead, Tape/Reel (RT1)  
BA = Tin/Lead, Bulk (B43)



**SPECIAL**  
(Dash Number)  
(up to 2 digits)  
From 1-99 as applicable

Historical Part Number example: WSL2512 0.004Ω 1% EA (will continue to be accepted)

WSL2512	0.004Ω	1%	EA
HISTORICAL MODEL	RESISTANCE VALUE	TOLERANCE CODE	PACKAGING

\* Pb containing terminations are not RoHS compliant, exemptions may apply

**DIMENSIONS**

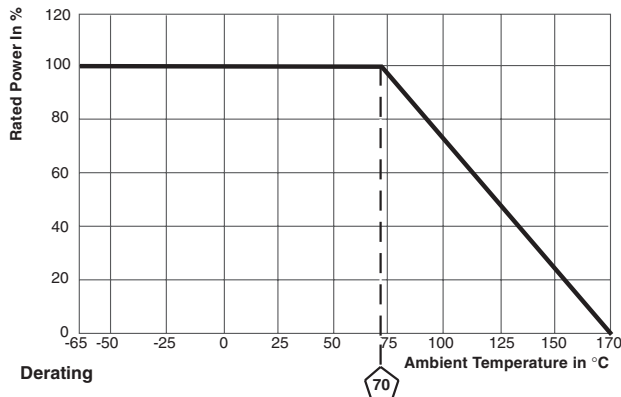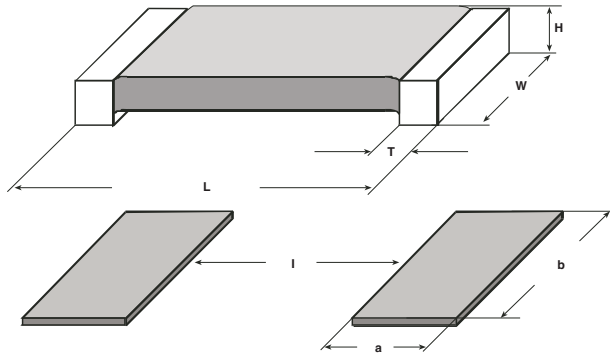

MODEL	DIMENSIONS in inches [millimeters]				
	RESISTANCE RANGE Ω	L	W	H	T
WSL0603	0.015 - 0.1	0.060 ± 0.010 [1.52 ± 0.254]	0.030 ± 0.010 [0.76 ± 0.254]	0.013 ± 0.005 [0.330 ± 0.127]	0.015 ± 0.010 [0.381 ± ]
WSL0805	0.01 - 0.2	0.080 ± 0.010 [2.03 ± 0.254]	0.050 ± 0.010 [1.27 ± 0.254]	0.013 ± 0.005 [0.330 ± 0.127]	0.015 ± 0.010 [0.381 ± ]
WSL1206	0.002 - 0.2	0.126 ± 0.010 [3.20 ± 0.254]	0.063 ± 0.010 [1.60 ± 0.254]	0.025 ± 0.010 [0.635 ± 0.254]	0.020 ± 0.010 [0.508 ± ]
WSL2010	0.001 - 0.0069	0.200 ± 0.010 [5.08 ± 0.254]	0.100 ± 0.010 [2.54 ± 0.254]	0.025 ± 0.010 [0.635 ± 0.254]	0.058 ± 0.010 [1.47 ± 0.254]
	0.007 - 0.5	0.200 ± 0.010 [5.08 ± 0.254]	0.100 ± 0.010 [2.54 ± 0.254]	0.025 ± 0.010 [0.635 ± 0.254]	0.020 ± 0.010 [0.508 ± ]
WSL2512	0.001 - 0.0049	0.250 ± 0.010 [6.35 ± 0.254]	0.125 ± 0.010 [3.18 ± 0.254]	0.025 ± 0.010 [0.635 ± 0.254]	0.087 ± 0.010 [2.21 ± 0.254]
	0.005 - 0.0069	0.250 ± 0.010 [6.35 ± 0.254]	0.125 ± 0.010 [3.18 ± 0.254]	0.025 ± 0.010 [0.635 ± 0.254]	0.047 ± 0.010 [1.19 ± 0.254]
	0.007 - 0.5	0.250 ± 0.010 [6.35 ± 0.254]	0.125 ± 0.010 [3.18 ± 0.254]	0.025 ± 0.010 [0.635 ± 0.254]	0.030 ± 0.010 [0.762 ± ]
WSL2816	0.01 - 0.1	0.280 ± 0.010 [7.1 ± 0.254]	0.165 ± 0.010 [4.2 ± 0.254]	0.025 ± 0.010 [0.635 ± 0.254]	0.062 ± 0.010 [1.57 ± 0.254]

MODEL	SOLDER PAD DIMENSIONS in inches [millimeters]			
	RESISTANCE RANGE Ω	a	b	l
WSL0603	0.015 - 0.1	0.040 [1.01]	0.040 [1.01]	0.020 [0.50]
WSL0805	0.01 - 0.2	0.040 [1.02]	0.050 [1.27]	0.020 [0.50]
WSL1206	0.002 - 0.2	0.050 [1.27]	0.070 [1.78]	0.055 [1.40]
WSL2010	0.001 - 0.0069	0.093 [2.36]	0.120 [3.05]	0.055 [1.40]
	0.007 - 0.5	0.055 [1.40]	0.120 [3.05]	0.130 [3.30]
WSL2512	0.001 - 0.0049	0.120 [3.05]	0.145 [3.68]	0.050 [1.27]
	0.005 - 0.0069	0.083 [2.11]	0.145 [3.68]	0.125 [3.18]
	0.007 - 0.5	0.065 [1.65]	0.145 [3.68]	0.160 [4.06]
WSL2816	0.01 - 0.1	0.130 [3.3]	0.190 [4.8]	0.040 [1.00]

PERFORMANCE		
TEST	CONDITIONS OF TEST	TEST LIMITS
Thermal Shock	- 55°C to + 150°C, 1000 cycles, 15 minutes at each extreme	± (0.5% + 0.0005Ω) ΔR
Short Time Overload	5 x rated power for 5 seconds	± (0.5% + 0.0005Ω) ΔR
Low Temperature Operation	- 65°C for 24 hours	± (0.5% + 0.0005Ω) ΔR
High Temperature Exposure	1000 hours @ + 170°C	± (1.0% + 0.0005Ω) ΔR
Bias Humidity	+ 85°C, 85% RH, 10% Bias, 1000 hours	± (0.5% + 0.0005Ω) ΔR
Mechanical Shock	100g's for 6 milliseconds, 5 pulses	± (0.5% + 0.0005Ω) ΔR
Vibration	Frequency varied 10 to 2000Hz in one minute, 3 directions, 12 hours	± (0.5% + 0.0005Ω) ΔR
Load Life	1000 hours @ rated power, + 70°C, 1.5 hours "ON", 0.5 hours "OFF"	± (1.0% + 0.0005Ω) ΔR
Resistance to Solder Heat	+ 260°C Solder, 10 - 12 second dwell, 25mm/second emergence	± (0.5% + 0.0005Ω) ΔR
Moisture Resistance	MIL-STD-202, Method 106, 0% power, 7a and 7b not required	± (0.5% + 0.0005Ω) ΔR

PACKAGING				
MODEL	REEL			
	TAPE WIDTH	DIAMETER	PIECES/REEL	CODE
WSL0603	8mm/Punched Paper	178mm/7"	5000	EA
WSL0805	8mm/Punched Paper	178mm/7"	5000	EA
WSL1206	8mm/Embossed Plastic	178mm/7"	4000	EA
WSL2010	12mm/Embossed Plastic	178mm/7"	4000	EA
WSL2512	12mm/Embossed Plastic	178mm/7"	2000	EA
WSL2816	16mm/Embossed Plastic	330mm/13"	5000	EA

Embossed carrier tape per EIA-481-1A.



## Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.